

Screwdriver - SZS 0,8X4,0 VDE - 1212508

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Screwdriver, slot-headed, VDE insulated, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

Your advantages

- ✔ The tools feature ergonomic two-component safety handles
- ✔ Large contact surface of blades inside screw head
- ✔ Individually tested safety screwdrivers according to DIN EN 60900 (VDE 0682-201)
- ✔ For working on or in the vicinity of live parts up to 1000 V AC or 1500 V DC

Key Commercial Data

Packing unit	10 pc
GTIN	 4 046356 543064
GTIN	4046356543064

Technical data

Dimensions

Length (b)	198 mm
Width (a)	33 mm
Blade thickness	0.8 mm
Blade width	4 mm
Blade height	100 mm
Wrench size	0 mm

General

Type	Bladed
	straight
Material	alloyed tool steel
Test standard	DIN/ISO 2380-1 IEC 60900:2004

Standards and Regulations

Test standard	DIN/ISO 2380-1 IEC 60900:2004
---------------	-------------------------------

Environmental Product Compliance

Screwdriver - SZS 0,8X4,0 VDE - 1212508


Technical data

Environmental Product Compliance

California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
---------------------------	---


Drawings

Pictogram

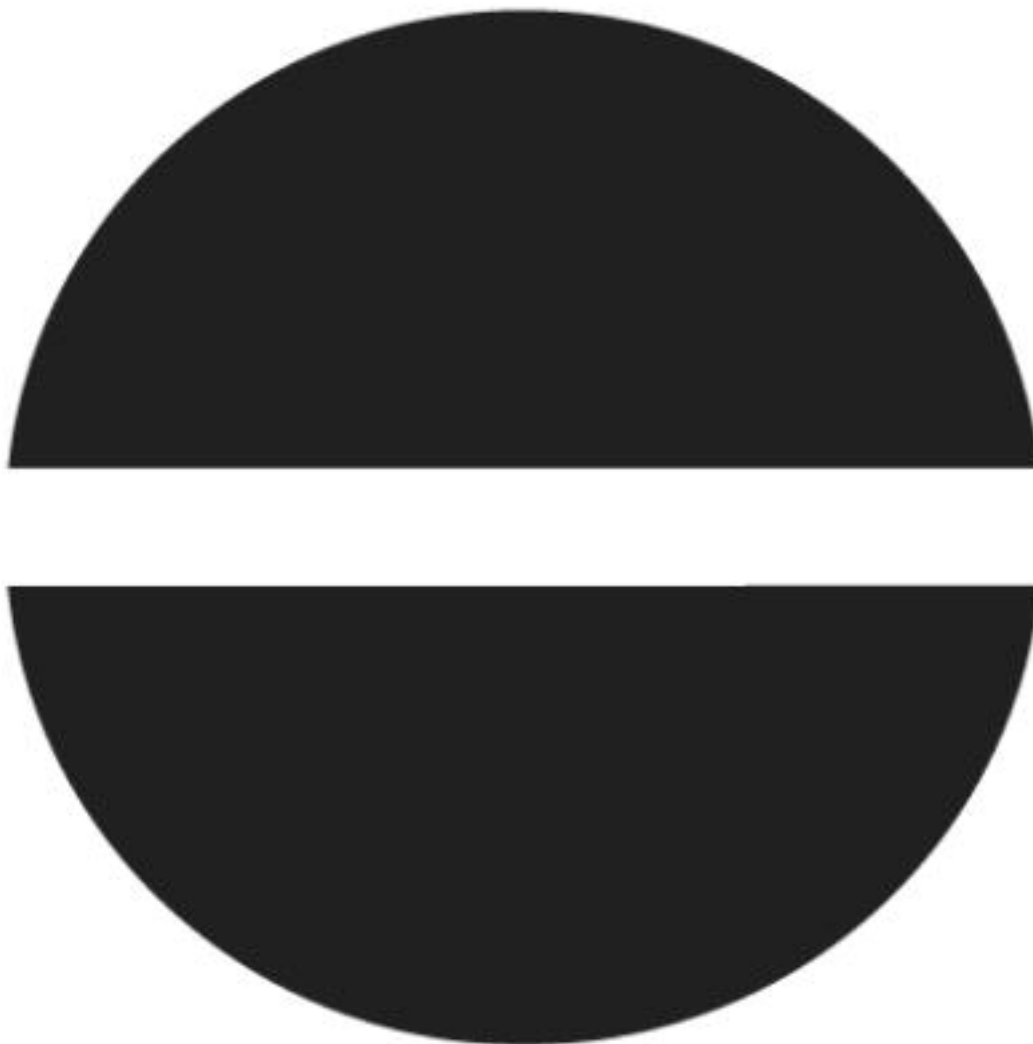

Screwdriver - SZS 0,8X4,0 VDE - 1212508

Dimensional drawing

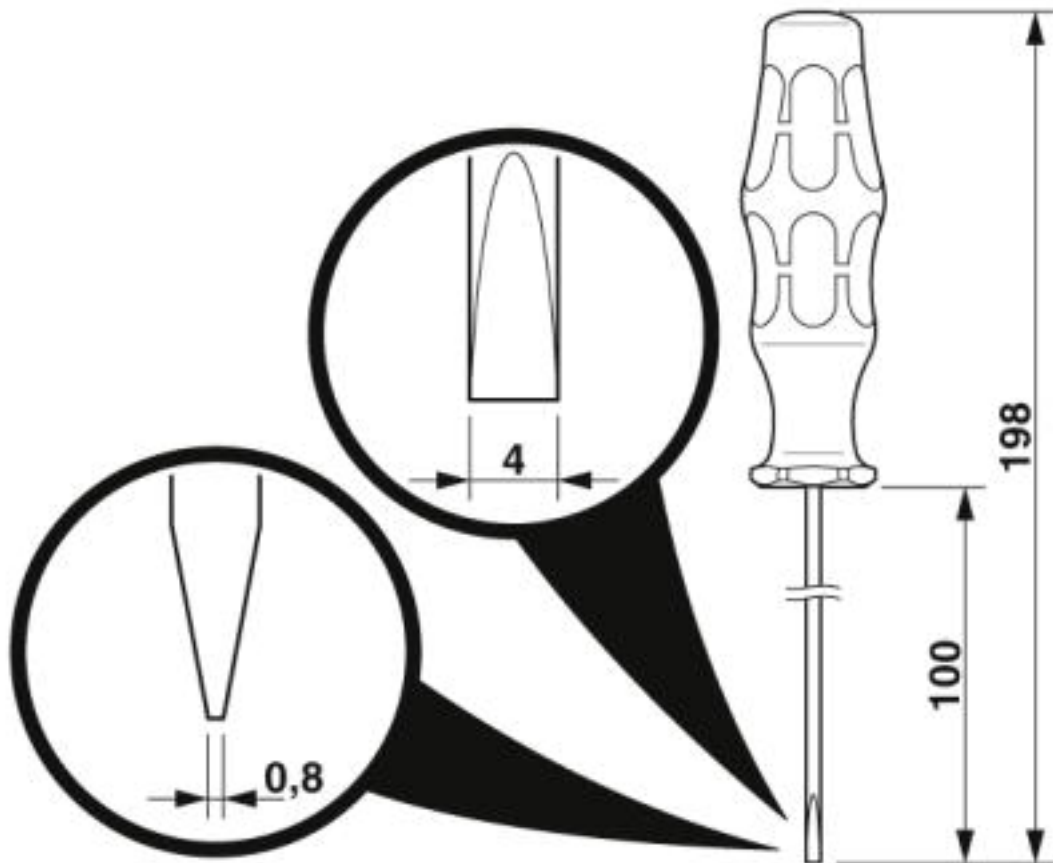

Approvals

Approvals

Approvals

VDE Zeichengenehmigung / EAC

Ex Approvals

Approval details

VDE Zeichengenehmigung



<http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx>

086858

Screwdriver - SZS 0,8X4,0 VDE - 1212508

Approvals

EAC



RU x-
DE.xx08.B.02974

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>