





REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2020/05/13





Recommended Panel Cut-Out



Panel T: Max 3.5mm

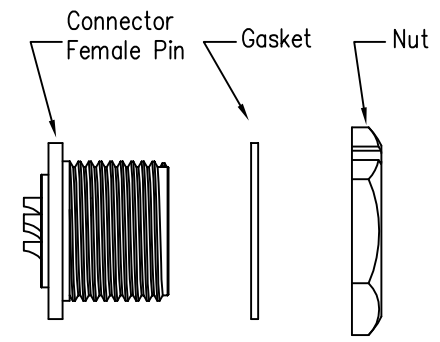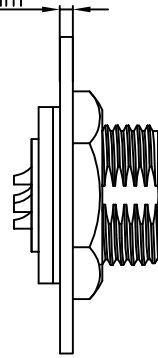

23XXX615-01
Pin Number




5 Pin

6 Pin

P/N: 23005615-01

P/N: 23006615-01

Pin Assignments Front View



Specification:

- 1.Operation Temperature: -45°C~105°C.
- 2.Insulation Resistance: 100MΩ at DC500V.
- 3.Contact Resistance: <math>< 10\text{m}\Omega</math>
- 4.Withstand Voltage: 1500V AC
- 5.Operating Current: 10A
- 6.Operating Voltage: AC 125V
- 7.Waterproof Rate: IP67 (Mated)
- 8.Housing: Nylon, Black
- 9.Female Pin: Copper Alloy, Gold Plated
- 10.Gasket: Silicon Gray
- 11.Panel Nut: Nylon, Black
- 12.Torque Rate: 0.8~1.0N·m
- 13.RoHS Compliant.
- 14.UL Compliant.
- 15.Mating Cap P/N: 806-00021-00

UNIT:mm		DESCRIPTION Middle Series Screw Type Front Mount With Female Pin	CHOGORI		PART NO	23XXX615-01	DRAWN BY	Liu	DATE	2020/05/17
					DWG NO		CHECKED BY	Mo	DATE	2020/05/17
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°		SCALE: 1:1	SHEET 1 OF 1	CUSTOMER		APPROVED BY	Panson	DATE	2020/05/17	
		REV. C1	SIZE A4	* : Inspection Item						

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.