



## 150QBW4\_2.25 Series

150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

### DC-DC Converter 150 Watt

- ⊕ Wide Input voltage range (4:1)
- ⊕ High efficiency up to 91%
- ⊕ Short circuit protection (SCP)
- ⊕ Input under-voltage, over-current, over-voltage, over-temperature protection
- ⊕ Isolation: 2.25KVDC
- ⊕ Operating temperature range: -40°C to +85°C
- ⊕ Five-sided metal shielding package
- ⊕ International standard pin-out: 1/4 brick

The 150QBW4\_2.25 series offers 4:1 input voltage, efficiency up to 91%, 2250VDC isolation, Input under-voltage protection, output short circuit protection, over-current protection, over-voltage protection, over-temperature protection and EMI meets CISPR32/EN55032 CLASS A by adding module recommended circuit.

All models are widely applied in battery power supplies, industrial control, electricity, instruments, railway, communication and intelligence robot fields.



Common specifications	
Short circuit protection*:	Hiccup, continuous, automatic recovery
Cooling:	Natural or forced convection
Operation temperature range:	-40°C~+85°C
Storage temperature range:	-55°C ~+125°C
Over temperature protection:	+105°C TYP
Pin welding resistance temperature:	300°C MAX, 1.5mm from case for 10sec. 260°C MAX, Wave-soldering, 10sec.
Storage humidity range:	< 95%
Vibration:	IEC/EN61373 car body 1 B mold
Trim:	90%Vo MIN, 110%Vo MAX
Sense:	105%Vo MAX
Case material:	Plastic [UL94-V0] / aluminium
MTBF:	500,000 hours
Dimensions:	61.8*40.2*12.7 mm 62.0*56.0*14.6 mm (with base-plate) 61.8*40.2*27.7 mm (with heatsink)
Weight:	83g 103g (with base-plate) 114g (with heatsink)

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input current	full load/no load, nominal Vin		3435/ 100	3512/ 200	mA
Reflected ripple current	Nominal Vin		100		mA
Surge voltage	1sec. max.	-0.7		90	VDC
Start-up threshold voltage	100% load			18	VDC
Input under voltage protection		14	16		VDC
Input filter	Pi filter				
Hot plug	Unavailable				
Ctrl (the voltage of Ctrl pin is relative to input pin GND)	<ul style="list-style-type: none"> <li>• Module switch ON</li> <li>• Module switch OFF</li> <li>• Input current when switched OFF</li> </ul>		Ctrl open circuit or connected to TTL high level (3.5-12VDC) Ctrl pin connected to GND or low level (0-1.2VDC)	2	10 mA

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy			±1	±3	%
Line regulation			±0.2	±0.5	%
Load regulation			±0.5	±0.75	%
Transient recovery time	25% load step change		300	500	µs
Transient response deviation	25% load step change		±3	±5	%
Temperature coefficient				±0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		150	250	mVp-p
Output over-voltage protection	Input voltage range	110	130	160	%Vo
Output over-current protection	Input voltage range	110	130	150	%Io
Switching frequency	PFM mode		250		KHz

\*Test ripple and noise by "parallel cable" method.

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage*	<ul style="list-style-type: none"> <li>• Input-output</li> <li>• Input-case</li> <li>• Output-case</li> </ul>	2250		1500	VDC
Isolation resistance	Insulation voltage 500VDC	100			MΩ
Isolation capacitance	Input-output, 100KHz/0.1V		2200		pF

\* Tested for 1 minute and leak current less than 5mA

#### Example:

**150QBW4\_4812S2.25**  
**150= 150 Watt; QB= Quarter-Brick; W4= Wide input (4:1);**  
**48= 18-75 Vin; 12= 12Vout; S= Single Output; 2.25= 2.25kVDC isolation**

#### Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. In this datasheet, all the test methods of indications are based on corporate standards.

## 150QBW4\_2.25 Series




150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

EMC specifications				
EMI	CE	CISPR32/EN55032	CLASS A (see EMC recommended circuit, fig. 2)	
EMI	RE	CISPR32/EN55032	CLASS A (see EMC recommended circuit, fig. 2)	
EMS	ESD	IEC/EN61000-4-2, EN50121-3-2	Contact ±6KV/Air ±8KV	perf. Criteria B
EMS	RS	IEC/EN61000-4-3, EN50121-3-2	10V/m	perf. Criteria A
EMS	EFT	IEC/EN61000-4-4, EN50121-3-2	±2KV (see EMC recommended circuit, fig. 2)	perf. Criteria A
EMS	Surge	EN50121-3-2	differential mode ±1KV, 1.2/50us, source impedance 42Ω (see EMC recommended circuit, fig. 2)	perf. Criteria B
EMS	CS	IEC/EN61000-4-6, EN50121-3-2	10 Vr.m.s	perf. Criteria A

Part Number	Input Voltage [V]		Output Voltage [VDC]	Output Current [A, max]	Min	Efficiency [%]		Capacitive load [A, max]
	Nominal	Range				Min	Typ	
150QBW4_4812S2.25	48	18-75	12	12.5	89	91	2000	
150QBW4_4824S2.25	48	18-75	24	6.25	89	91	1000	
150QBW4_4848S2.25	48	18-75	48	3.13	89	91	450	

For aluminium base-plate add -BP at the end, f.ex. 150QBW4\_xxyyS2.25-BP, for heatsink add -H at the end, f.ex. 150QBW4\_xxyyS2.25-H.

## Temperature derating curves

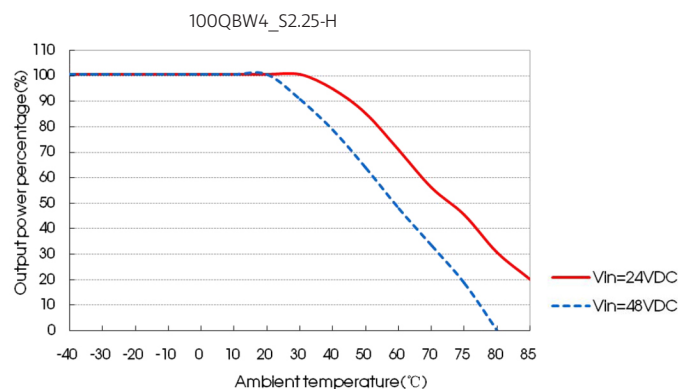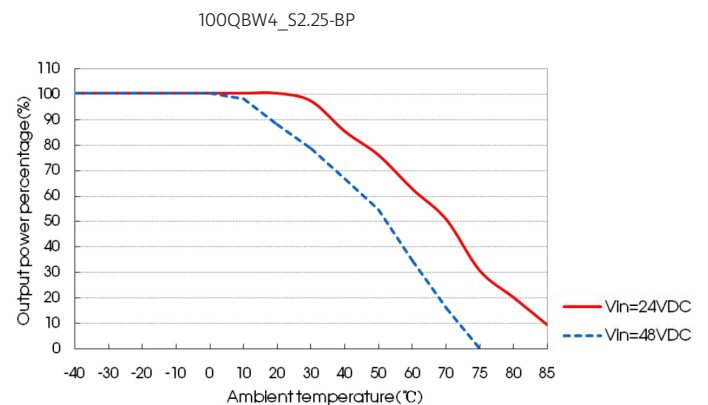
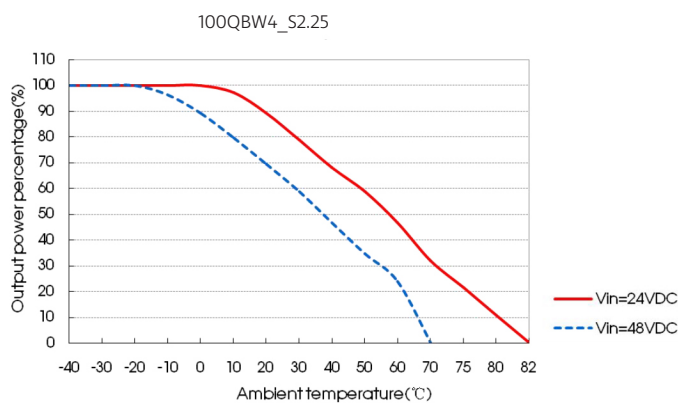


Note: Temperature Derating Curves were tested at natural convection (20FLM).

## 150QBW4\_2.25 Series

150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

### Efficiency

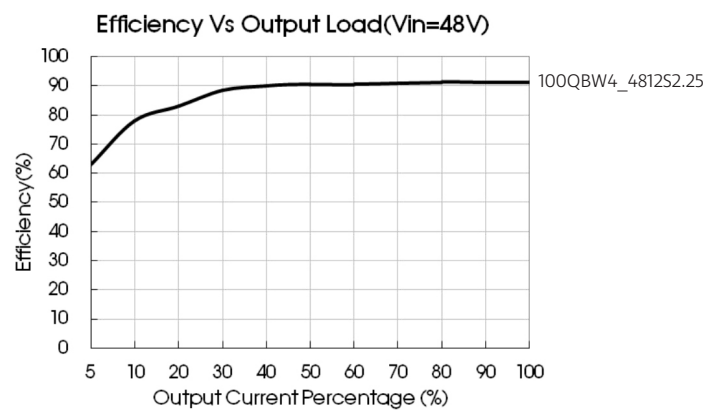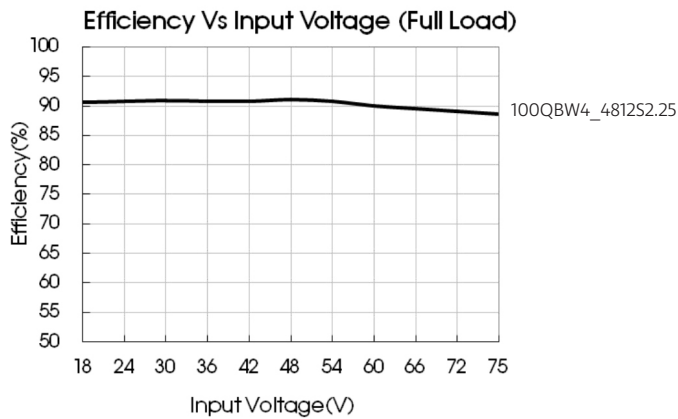


### Sense of application and precautions

#### When not using remote sense

Notes:


1. When not using remote sense, make sure +Vo and Sense + are shorted, and that 0V and Sense- are shorted as well;
2. Keep the tracks between +Vo and Sense +, 0V and Sense- as short as possible and close to the terminal. Avoid a looping track. If noise interferes the loop, the operation of the power module will become unstable.

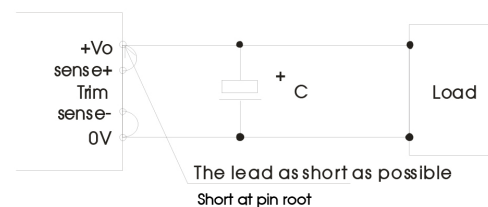

#### When remote sense is used

Notes:


1. Using remote sense with long wires may cause output voltage to become unstable. Consult us if long sensing wiring is necessary.
2. Sense tracks or wires should be as short as possible. If using wires, it should not use twisted-pair or shielded wires.
3. Please use wide PCB tracks or thick wires between the power supply module and the load, the line voltage drop should be kept less than 0.3V. Make sure the power supply module's output voltage remains within the specified range.
4. The impedance of wires may cause the output voltage oscillation or a greater ripple, please take adequate assessments before using.

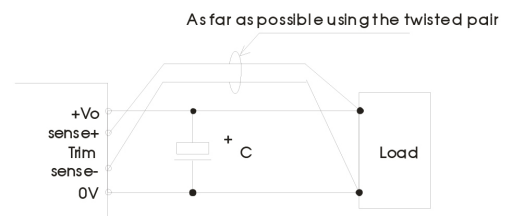

### Typical application

If not using Gaptec's recommended circuit, please ensure an 220µF electrolytic capacitors in parallel with the input, which used to suppress the surge voltage come from the input terminal. All the DC/DC converters of this series are tested according to the recommended circuit before delivery.

If it is required to further reduce input&output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance, provided that the capacitance is no larger than the max. capacitive load of the product.

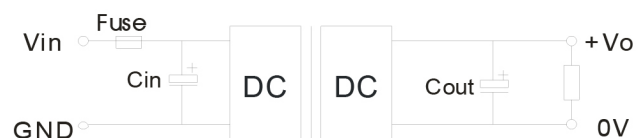


Vout (VDC)	Fuse	Cin	Cout
12	15A, slow blow	220µF	220µF
24	15A, slow blow	220µF	100µF
48	15A, slow blow	220µF	100µF


## 150QBW4\_2.25 Series

150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

### EMC solution recommended circuit

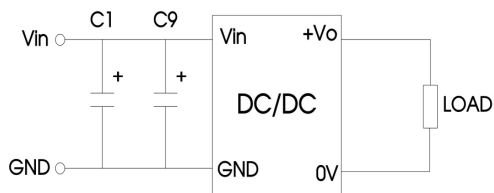

device number	Device parameter	Device function
C1	150 $\mu$ F electrolytic capacitor	Meet pulse group and surge
C9	47 $\mu$ F electrolytic capacitor	

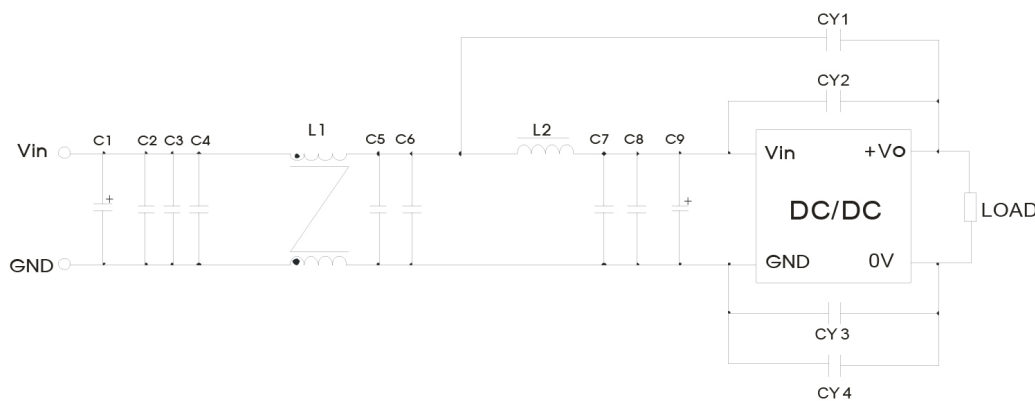

Device number	Device parameter	Device function
C1	150 $\mu$ F electrolytic capacitor	Meet conducted emission and radiated emission
C9	47 $\mu$ F electrolytic capacitor	
C2, C3, C4, C5, C6, C7, C8	2.2 $\mu$ F ceramic capacitor	
L1	1.0mH common mode inductor	
L2	1.5 $\mu$ H inductance	
CY1, CY2, CY3, CY4	1nF Y1 safety capacitor	

### Reflected ripple current test circuit




Note:  $L_{in}(4.7\mu H)$  ,  $C_{in}(220\mu F, ESR < 1.0\Omega \text{ at } 100 \text{ KHz})$

## 150QBW4\_2.25 Series

150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

### Trim application & trim resistance

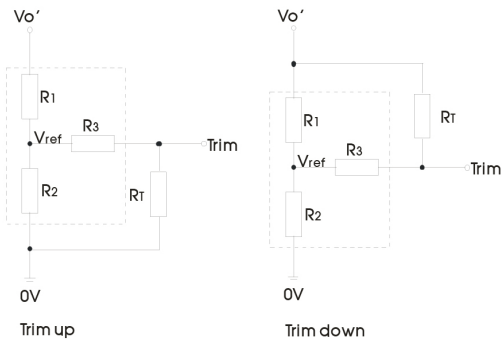

Calculation formula of Trim resistance:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

$R_T$  is Trim resistance,  $\alpha$  is a self-defined parameter, with no real meaning.  $V_{o'}$  for the actual needs of the up or down regulated voltage

Application circuit for TRIM (Part in broken line is the interior of models)

Vout(V)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
12	11.000	2.87	15	2.5
24	24.872	2.87	15	2.5
48	53.017	2.913	15	2.5


When the Trim function with down regulated is used, If the  $R_T$  resistor is too low or "Trim" is short with "+Vo", the output voltage  $V_{o'}$  would be lower than  $0.9V_{o'}$ , which may cause the product to be irreversibly damaged.

It is not allowed to connect modules output in parallel to enlarge the power.

### Mechanical dimensions and recommended layout

100QBW4\_xxyyS2.25

THIRD ANGLE PROJECTION

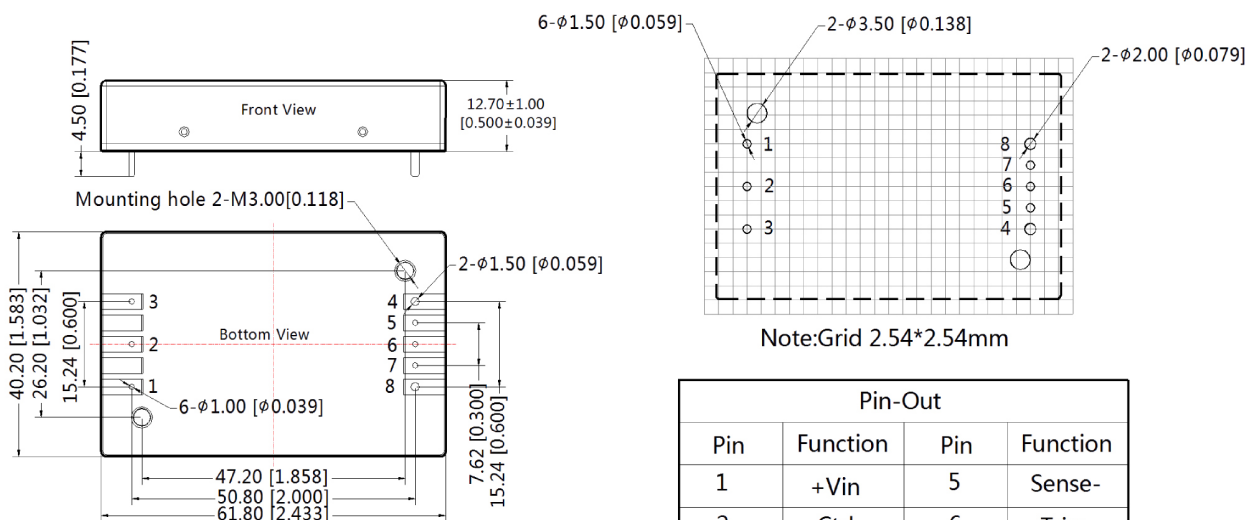

Note:  
 Unit: mm[inch]  
 Pin1, 2, 3, 5, 6, 7's diameter: 1.00[0.039]  
 Pin4, 8's diameter: 1.50[0.059]  
 Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
 General tolerances:  $\pm 0.50[\pm 0.020]$   
 Mounting hole screwing torque: Max 0.4 N·m


Pin-Out			
Pin	Function	Pin	Function
1	+Vin	5	Sense-
2	Ctrl	6	Trim
3	-Vin	7	Sense+
4	0V	8	+Vo

## 150QBW4\_2.25 Series

150W Quarter-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

### Base plate dimensions and recommended layout


100QBW4\_xxyyS2.25-BP

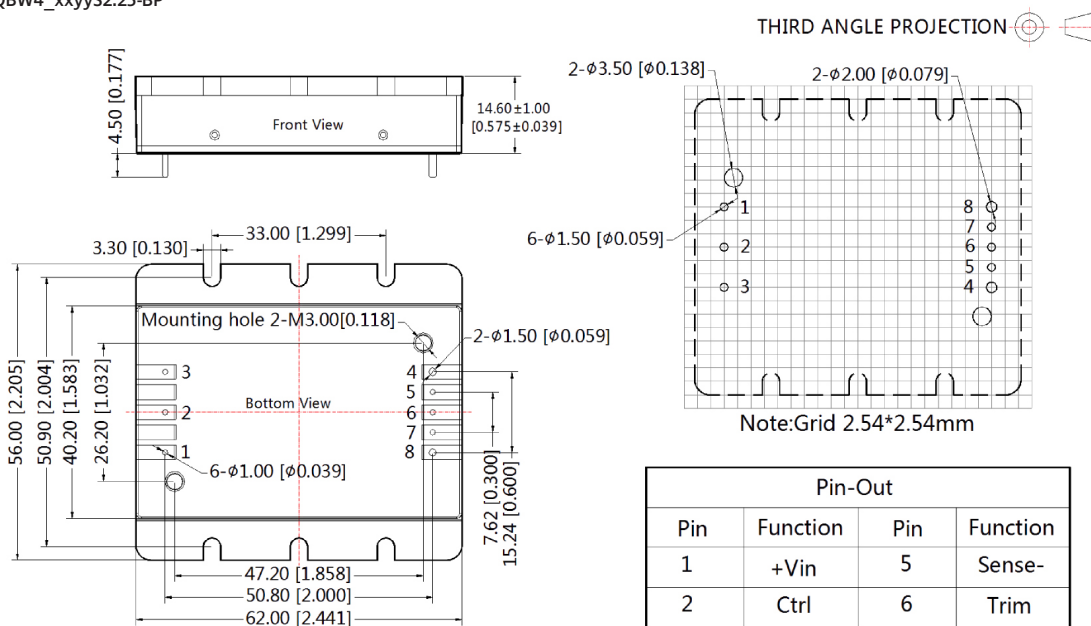

Note:  
 Unit: mm[inch]  
 Pin1, 2, 3, 5, 6, 7's diameter: 1.00[0.039]  
 Pin4, 8's diameter: 1.50[0.059]  
 Pin diameter tolerances:  $\pm$ 0.10[ $\pm$ 0.004]  
 General tolerances:  $\pm$ 0.50[ $\pm$ 0.020]  
 Mounting hole screwing torque: Max 0.4 N·m

### Base-plate dimensions and recommended layout

100QBW4\_xxyyS2.25-H

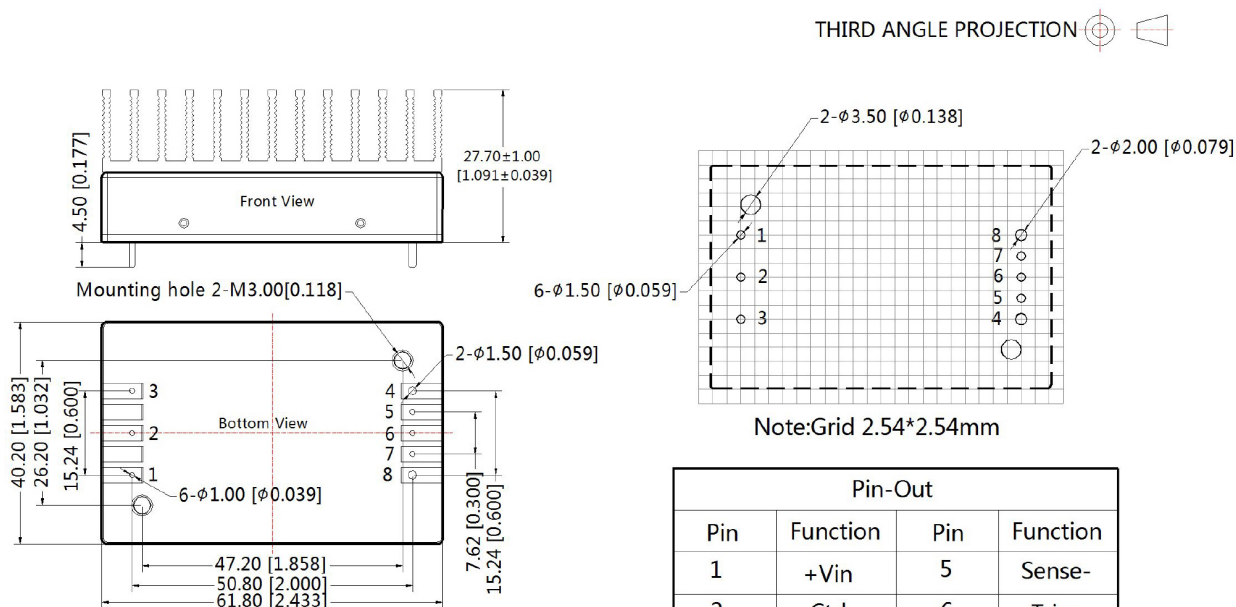

Note:  
 Unit: mm[inch]  
 Pin1, 2, 3, 5, 6, 7's diameter: 1.00[0.039]  
 Pin4, 8's diameter: 1.50[0.059]  
 Pin diameter tolerances:  $\pm$ 0.10[ $\pm$ 0.004]  
 General tolerances:  $\pm$ 0.50[ $\pm$ 0.020]  
 Mounting hole screwing torque: Max 0.4 N·m