

## MA17692BEVKIT# Evaluation Kit

## Evaluates: MAX17692B 5V Output-Voltage Application

### General Description

The MAX17692BEVKIT# evaluation kit (EV kit) provides a proven design to evaluate the performance of the MAX17692B IC. This fully assembled and tested circuit is implemented using the MAX17692B, the No-Opto flyback converter with an integrated 76V nMOSFET available in a 12-pin TDFN package with an exposed pad. The IC data sheet provides a complete description of the part and should be read in conjunction with this EV kit data sheet prior to operating the EV kit.

The MAX17692BEVKIT# EV kit output is configured for an isolated +5V and provides up to 0.65A of output current over 18V to 36V input range. The device switches at a 145kHz switching frequency. The EV kit regulates the output voltage within  $\pm 5\%$  over line, load, and temperature by sensing the output voltage on the primary-side. The converter does not need an optocoupler for the isolated output voltage sensing.

### Features

- 18V to 36V Input Range
- Isolated Output: 5V/0.65A DC
- Compact Design with High Switching Frequency (145kHz)
- 87% Peak Efficiency
- Resistor Programmable Input Enable/UVLO Protection
- External Loop Compensation with Design Flexibility
- 15ms Soft-Start Time
- Temperature Compensated Output Voltage Over -40°C to +125°C Operating Temperature
- Provision to External Clock Synchronization and Frequency Dithering
- V<sub>CC</sub> Overdrive to Improve Efficiency
- Minimum Number of External Components
- Proven PCB Layout
- Fully Assembled and Tested

**Ordering Information** appears at end of data sheet.

### Quick Start

#### Recommended Equipment

- MAX17692BEVKIT#
- One 18V to 36V DC, 0.65A power supply
- 3.25W resistive load with 0.65A sink capacity
- Four digital multimeters (DMM)

#### Warning:

- Do not turn on the power supply until all connections are completed.
- Do not touch any part of the circuit with bare hands or conductive materials when powered up.
- Make sure all high-voltage capacitors are fully discharged before handling. Allow 5 minutes after disconnecting the input power source before touching circuit parts.

#### Equipment Setup and Procedure

- 1) Set the power supply to +24V DC. Disable the power supply output.
- 2) Connect the positive terminal of the power supply to the VIN PCB pad and the negative terminal to the nearest PGND PCB pad. Connect the positive terminal of the electronic load to the VOUT PCB pad and the negative terminal to the nearest GND0 PCB pad.
- 3) Connect a DMM configured in voltmeter mode across the VOUT PCB pad and the nearest GND0 PCB pad.
- 4) Verify that shunt is installed across pins 1–2 on jumper JU1 for proper operation. See [Table 1](#) for details.
- 5) Verify that shunts are not installed for pins 1–2 on jumper JU2. See [Table 2](#) for details.
- 6) Enable the power supply.
- 7) Verify that the output voltmeter displays 5V and, if required, measure the output current using a DMM in Ammeter mode.
- 8) If required, vary the input voltage from 18V to 36V and the load current from 1mA to 0.65A, and verify that output voltage is 5V.

### Detailed Description

The MAX17692BEVKIT# provides a proven design to evaluate the MAX17692B high-efficiency DC-DC flyback converter. The device uses a novel sampling technique to eliminate the optocoupler in sensing and regulating

the isolated output voltage. The device integrates a 76V nMOSFET and reduces the external component count. The transformer design, as well as the selection of different components, are detailed in the *MAX17692B IC data sheet*. All passive components selected for this EV kit are available from multiple component vendors.

**Table 1. Converter SYNC Jumper (JU1) Settings**

SHUNT POSITION	SYNC/DITHER PIN	MAX17692B OPERATION
1–2*	Connected to GND	SYNC/DITHER function disabled
Not installed	Need to connect JU1 to external clock for external synchronization or implement dithering on the SYNC/DITHER pin	External clock synchronization or frequency dithering

\*Default position.

**Table 2. Converter EN/UVLO Jumper (JU2) Settings**

SHUNT POSITION	EN/UVLO PIN	MAX17692B OUTPUT
1–2	Connected to VIN	Enabled
Not installed*	Connected to the center node of resistor dividers R2 and R3	UVLO level is set by the resistor divider between VIN and GND

\*Default position.

### Component Suppliers

SUPPLIER	WEBSITE
Sumida Corp	www.sumida.com
Coilcraft Inc	www.coilcraft.com
Murata Americas	www.murata.com
Würth Elektronik	www.we-online.com
Vishay Dale	www.vishay.com

**Note:** Indicate that you are using the MAX17692BEVKIT# when contacting these component suppliers.






### Ordering Information

PART	TYPE
MAX17692BEVKIT#	EV Kit

#Denotes RoHS compliance.

EV Kit Performance Report


(VIN = 24V, unless otherwise noted.)

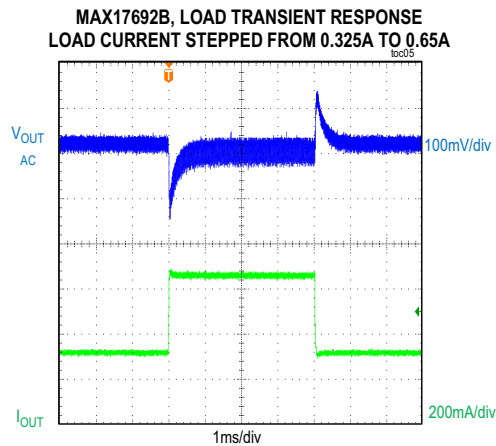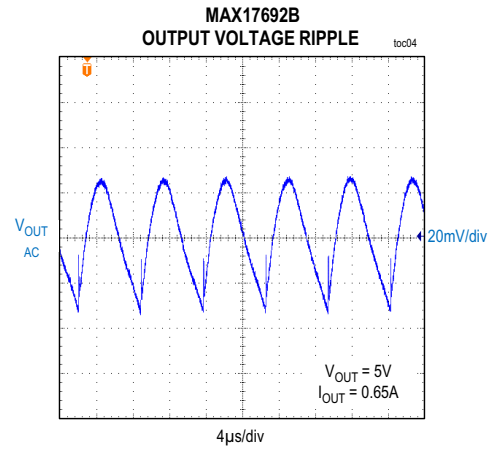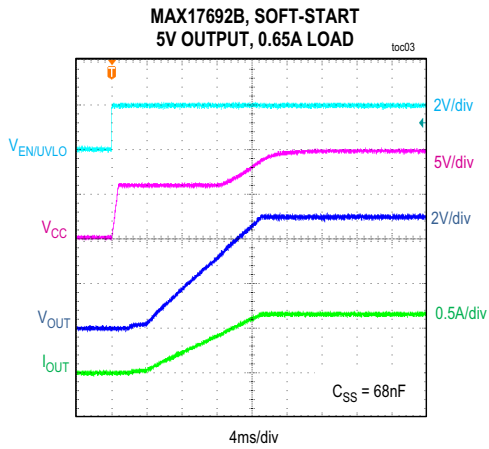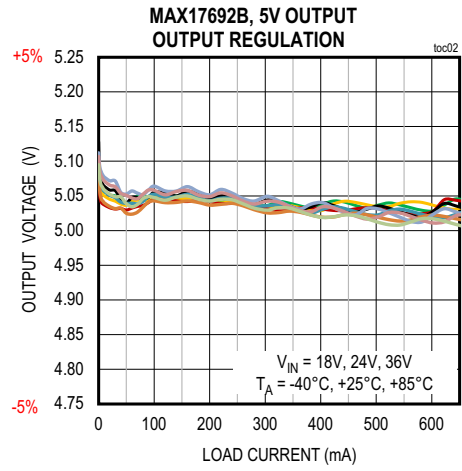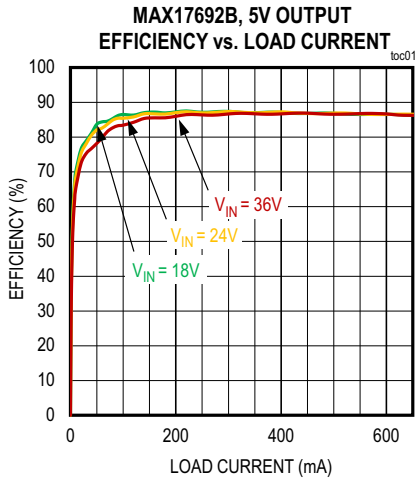


**MAX17692BEVKIT# Bill of Materials**

ITEM	Part Reference	QTY	Specification	Part Number
1	C1	1	47µF ±20%,50V;Aluminium capacitor	EEE-FT1H470AV
2	C4	1	2.2µF ±10%, 16V, X7R ceramic capacitor (0603)	GRM188Z71C225KE43
3	C5, C14	2	150pF ±5%, 100V, COG ceramic capacitor (0402)	C1005C0G2A151J050BA
4	C6	1	0.068µF ±10%, 16V, X7R ceramic capacitor (0402)	GCM155R71C683KA55
5	C7	1	0.01µF ±10%, 16V, X7R ceramic capacitor (0402)	GRM155R71C103KA01
6	C8	1	100pF ±1%, 16V, COG ceramic capacitor (0402)	VJ0402A101FXJCW18C
7	C10	1	100µF ±20%, 6.3V, X7S ceramic capacitor (1210)	JMK325AC7107MM-P
8	C13	1	1000pF ±10%, 3000V, X7R ceramic capacitor (1812)	HV1812Y102KXHATHV
9	C15	1	0.1µF ±10%, 50V, X7R ceramic capacitor (0402)	GRM155R71H104KE14
10	C16	1	0.1µF ±10%, 16V, X7R ceramic capacitor (0402)	GRM155R71C104KA88
11	C20	1	4.7µF ±10%, 50V, X7R ceramic capacitor (0805)	GRM21BZ71H475KE15
12	C21	1	0.1µF ±10%, 100V, X7R ceramic capacitor (0603)	GRM188R72A104KA35
13	C23	1	0.1µF ±10%, 25V, X7R ceramic capacitor (0603)	GRM188R71E104KA01
14	D1	1	Zener, 30V, 0.25W	CMDZ5252B
15	D2	1	Schottky diode, 40V,3A	SBR3U40P1
16	D3	1	Zener, 5.6V, 500mW	CMZ5919B
17	D4	1	Schottky diode, 100V,0.25A	BAT46WJ
18	D5	1	Schottky diode, 100V,1A	DFLS1100-7
19	R2	1	280kΩ, 1%, 0402	ERJ-2RKF2803
20	R3	1	0Ω, 0402	ERJ-2GE0R00
21	R4	1	165kΩ, 1%, 0603	CRCW0603165KFK
22	R5	1	10kΩ, 1%, 0402	CRCW040210K0FK
23	R6	1	178kΩ, 1%, 0402	CR0402-FX-1783GLF
24	R8	1	4.7Ω, 1%, 0402	CRCW04024R70FK
25	R9	1	68.1kΩ, 1%, 0402	CRCW040268K1FK
26	R10	1	24.3kΩ, 1%, 0402	RT0402FRE0724K3L
27	R12	1	22kΩ, 1%, 0402	CRCW040222K0FK
28	R17	1	49.9Ω, 1%, 0603	CRCW060349R9FK
29	T1	1	EP7,8-pin SMT, 55µH ±10% ,1.1A,(1-2):(5,6-7,8):(3-4)= 3:1:1.5,±1%	10348-T080 or 750319211
30	U1	1	4.2V-60V No-Opto Isolated Flyback Converter with Integrated FET	MAX17692BATC+
31	C2, C17-C19	0	OPEN: Capacitor (1210)	NA
32	L1	0	OPEN: Inductor (4mm x 4mm)	NA
33	C3, C9, C12, C22	0	OPEN: Capacitor (0402)	NA
34	C11	0	OPEN: Capacitor (1210)	NA
35	R1	0	OPEN: Resistor (0402)	NA
36	R11	0	OPEN: Resistor (0603)	NA
37	R13	0	OPEN: Resistor (0805)	NA
38	FB1	0	OPEN: Ferrite Bead (0805)	NA


MAX17692BEVKIT# Schematic

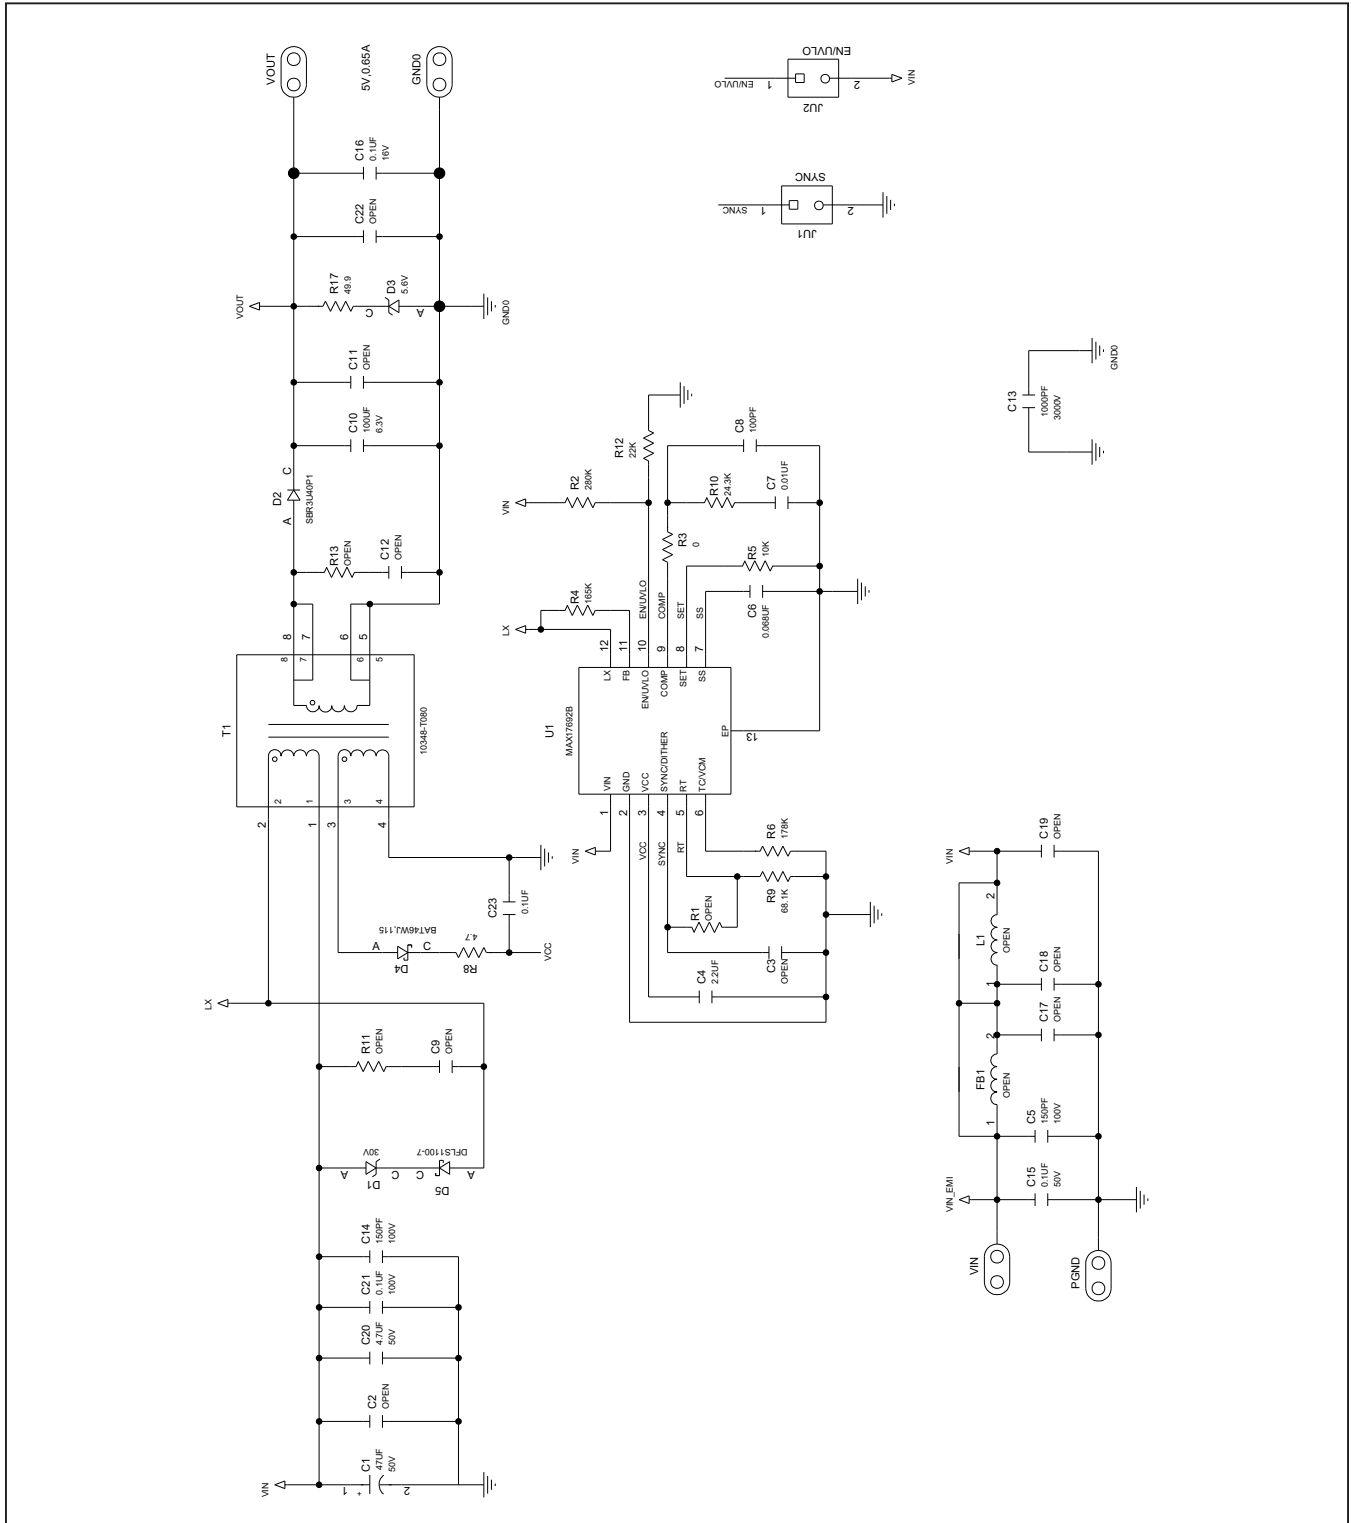


MAX17692BEVKIT# PCB Layout Diagrams

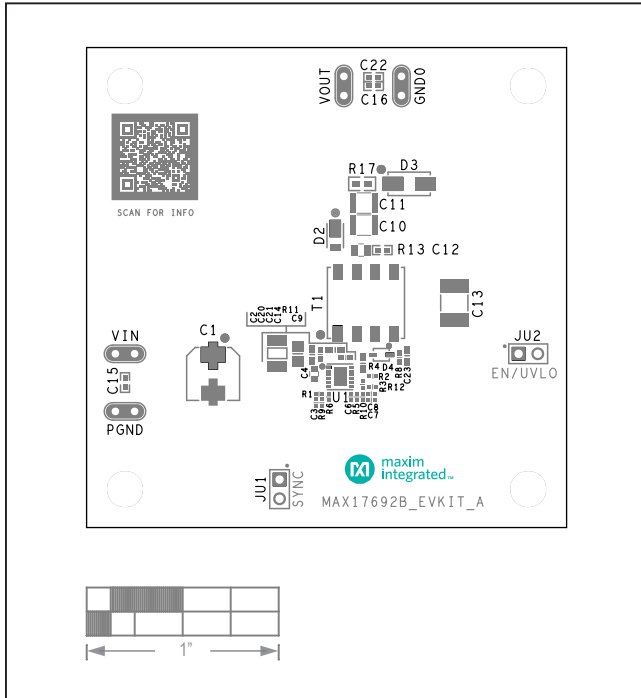


MAX17692BEVKIT# Layout—Top Silkscreen

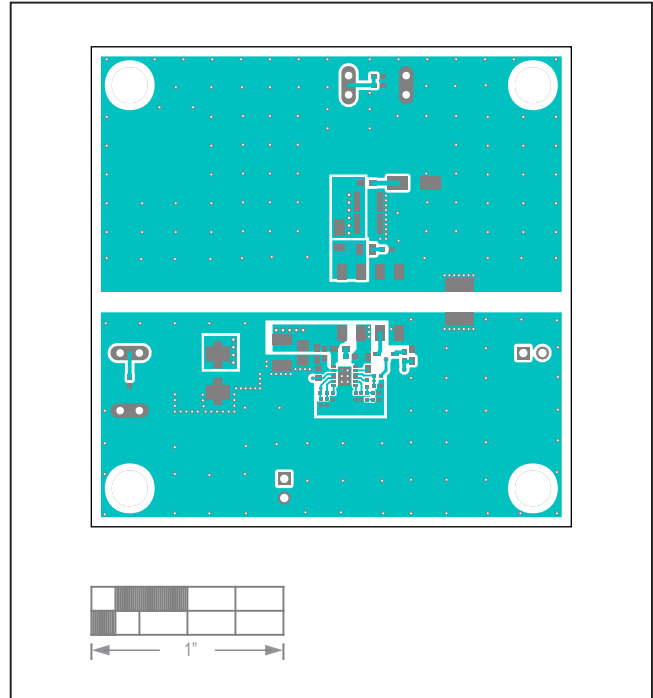

MAX17692BEVKIT# Layout—Top Layer

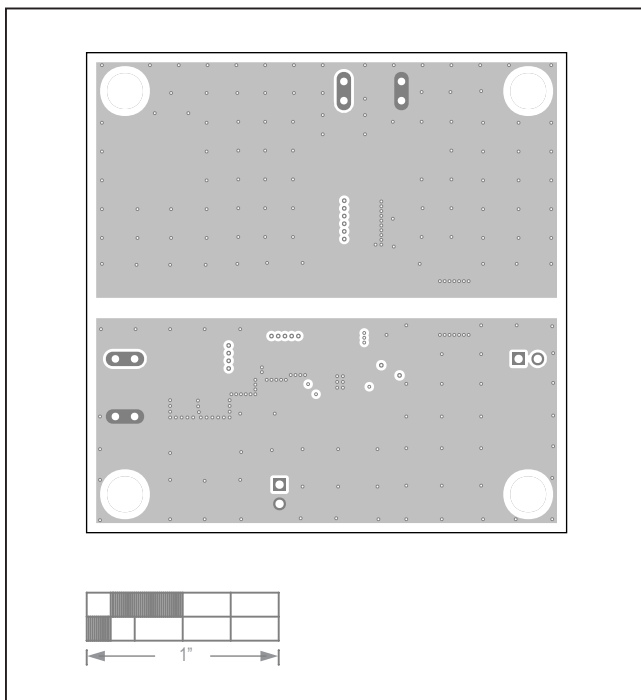


MAX17692BEVKIT# Layout—Layer 2

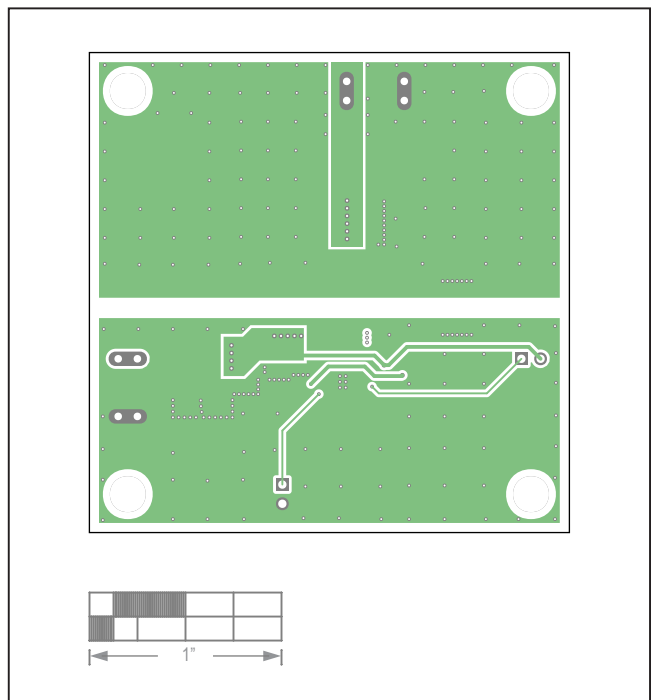


MAX17692BEVKIT# Layout—Layer 3

MAX17692BEVKIT# PCB Layout Diagrams (continued)

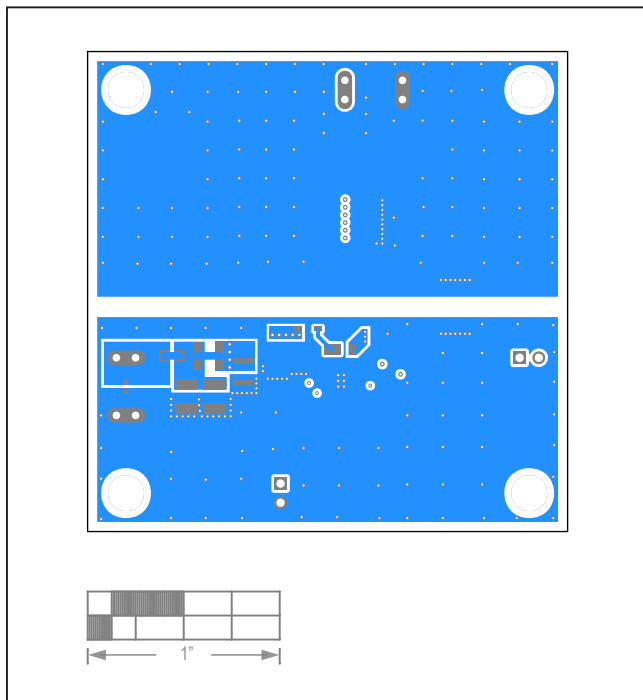

MAX17692BEVKIT# Layout—Bottom Layer

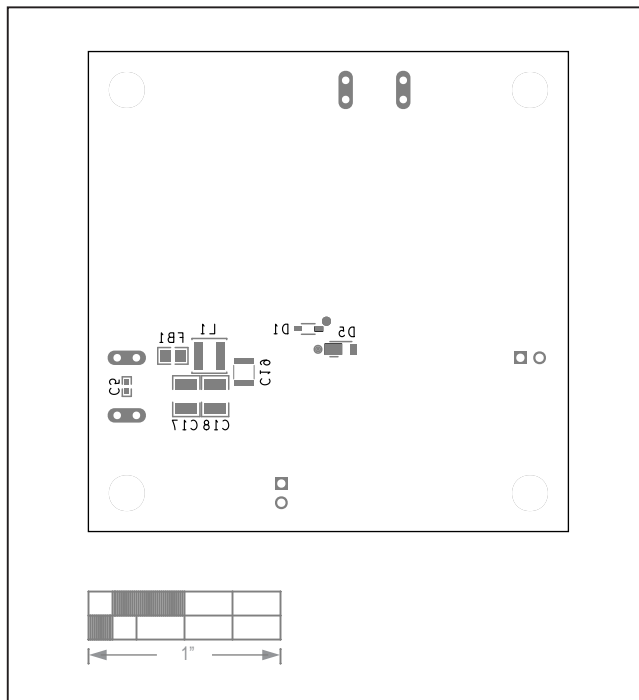

MAX17692BEVKIT# Layout—Bottom Silkscreen

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	12/20	Release for Market Intro	—

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*