

NON-METALLIC SEALTITE® SERIES

SEALTITE® NMUA (TYPE B) NON-METALLIC FLEXIBLE CONDUIT



DESCRIPTION

- Non-metallic Type B liquid-tight conduit
- Designed for standard commercial and industrial applications
- Approved in US (per NEC) for direct burial applications
- Also available by special order in other colours (consult factory)
- Uses special non-metallic connectors for easy installation. Can also be used with standard liquid-tight connector
- Available in custom cut lengths

COMMON NEC Articles


- 300.22 (C) Other spaces used for Environmental Air (Plenums)
- 501.10 (B) (2) Class I Div. 2; 502.10 (A) (2) and (B) (2) Class II Dive 1 & 2; 503.10 (A) (3) and (B) Class III Div. 1 & 2
- 356 Liquid-tight Flexible Nonmetal Conduit (LFNC-B)

SPECIFICATIONS

- Co-extruded PVC conduit
- Color: Gray
- Temp. range: -17°F to +176°F (-27°C to +80°C)
- UV (sunlight) resistant
- Oil resistant
- UL Approved #E211327
- CSA Approved #20817

APPLICATIONS

- HVAC industry
- Commercial and industrial applications requiring UL & CSA approvals

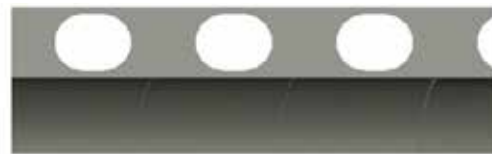

Rigid PVC Reinforced 3/8" through 2"



Trade Size (mm)	Item ID	Std. Pkg. ft	Inside Diameter		Outside Diameter		Bend Radius	Weight lbs/cft
			Min	Max	Min	Max		
3/8" (12)	39702	100	0.484	0.504	0.690	0.710	2.0	11
	39708	1000						
1/2" (16)	39712	100	0.622	0.640	0.820	0.840	3.3	15
	39713	1000						
3/4" (21)	39722	100	0.820	0.840	1.030	1.050	4.5	20
	39724	700						
1" (27)	39731	100	1.041	1.066	1.290	1.3150	6.5	27
	39734	500						
1-1/4" (35)	39741	50	1.380	1.410	1.630	1.660	8.0	36
	39742	100						
1-1/2" (41)	39753	50	1.575	1.600	1.865	1.900	9.0	45
	39752	100						
2" (53)	39761	50	2.020	2.045	2.340	2.375	11.1	67
	39768	100						

