

LTM4678 Dual 25A or Single 50A μ Module Regulator with Digital Power System Management 2x LTM4678; 100A

DESCRIPTION

Demonstration circuit 2638A-A is a high efficiency, high density, μ Module regulator with 4.5V to 16V input range. The output voltage is adjustable from 0.5V to 3.3V, and it can supply 100A maximum load current. The demo board has two LTM4678 μ Module[®] regulators, and the LTM4678 is a dual 25A or single 50A step-down regulator with PMBus power system management. Please see LTM4678 data sheet for more detailed information.

DC2638A-A powers up to default settings and produce power based on configuration resistors without the need for any serial bus communication. This allows easy evaluation of the DC/DC converter. To fully explore the extensive power system management features of the part, download

the GUI software LTpowerPlay[®] onto your PC and use ADI's I²C/SMBus/PMBus dongle DC1613A to connect to the board. LTpowerPlay allows the user to reconfigure the part on-the-fly and store the configuration in EEPROM, view telemetry of voltage, current, temperature and fault status.

GUI Download

The software can be downloaded from:

[LTpowerPlay](#)

For more details and instructions of LTpowerPlay, please refer to LTpowerPlay GUI for LTM4678 Quick Start Guide.

Design files for this circuit board are available.

All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY

Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		4.5V to 16V
Output Voltage, V_{OUT}	$V_{IN} = 4.5\text{V}-16\text{V}$, $I_{OUT} = 0\text{A}$ to 100A	0.5V to 3.3V, Default: 1.0V
Maximum Output Current, I_{OUT}	$V_{IN} = 4.5\text{V}-16\text{V}$, $V_{OUT} = 0.5\text{V}$ to 3.3V	100A
Typical Efficiency	$V_{IN} = 12\text{V}$, $V_{OUT} = 1.0\text{V}$, $I_{OUT} = 100\text{A}$	86.2% (See Figure 5)
Default Switching Frequency		350kHz

BOARD PHOTO

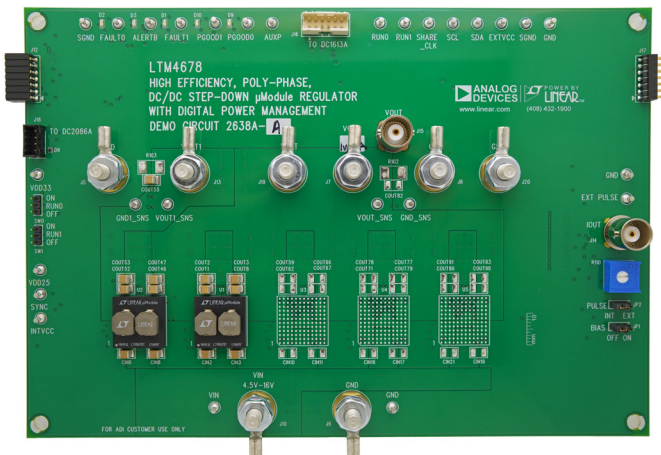


Figure 1. 2x LTM4678; 100A DC2638A-A Demo Circuit

QUICK START PROCEDURE

Table 1. LTM4678 Demo Boards for Up to 250A Point-of-Load Regulation

MAXIMUM OUTPUT CURRENT	NUMBER OF OUTPUTS	NUMBER OF LTM4678 μ Module REGULATORS ON THE BOARD	DEMO BOARD NUMBER
25A	2	1	DC2552A
50A	1	1	DC2570A
100A	1	2	DC2638A-A
150A	1	3	DC2638A-B
200A	1	4	DC2638A-C
250A	1	5	DC2638A-D

Demonstration circuit 2638A-A is easy to set up to evaluate the performance of the LTM4678EY. Refer to Figure 2 for the proper measurement equipment setup and follow the procedure below.

1. With power off, connect the input power supply to V_{IN} (4.5V–16V) and GND (input return).
2. Connect the 1.0V output load between V_{OUT} and GND (Initial load: no load).
3. Connect the DVMs to the input and output. Set default jumper position: SW0: ON; SW1: ON.
4. Turn on the input power supply and check for the proper output voltage. V_{OUT} should be $1.0V \pm 0.5\%$.
5. Once the proper output voltages are established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

6. Connect the dongle and control the output voltage from the GUI. See “LTpowerPlay GUI for the LTM4678 Quick Start Guide” for details.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 3 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (–) terminals of an output capacitor. The probe’s ground ring needs to touch the (–) lead and the probe tip needs to touch the (+) lead.

Connecting a PC to DC2638A-A

You can use a PC to reconfigure the power management features of the LTM4678 such as: nominal V_{OUT} , margin set points, OV/UV limits, temperature fault limits, sequencing parameters, the fault log, fault responses, GPIOs and other functionalities. The DC1613A dongle may be plugged when V_{IN} is present.

QUICK START PROCEDURE

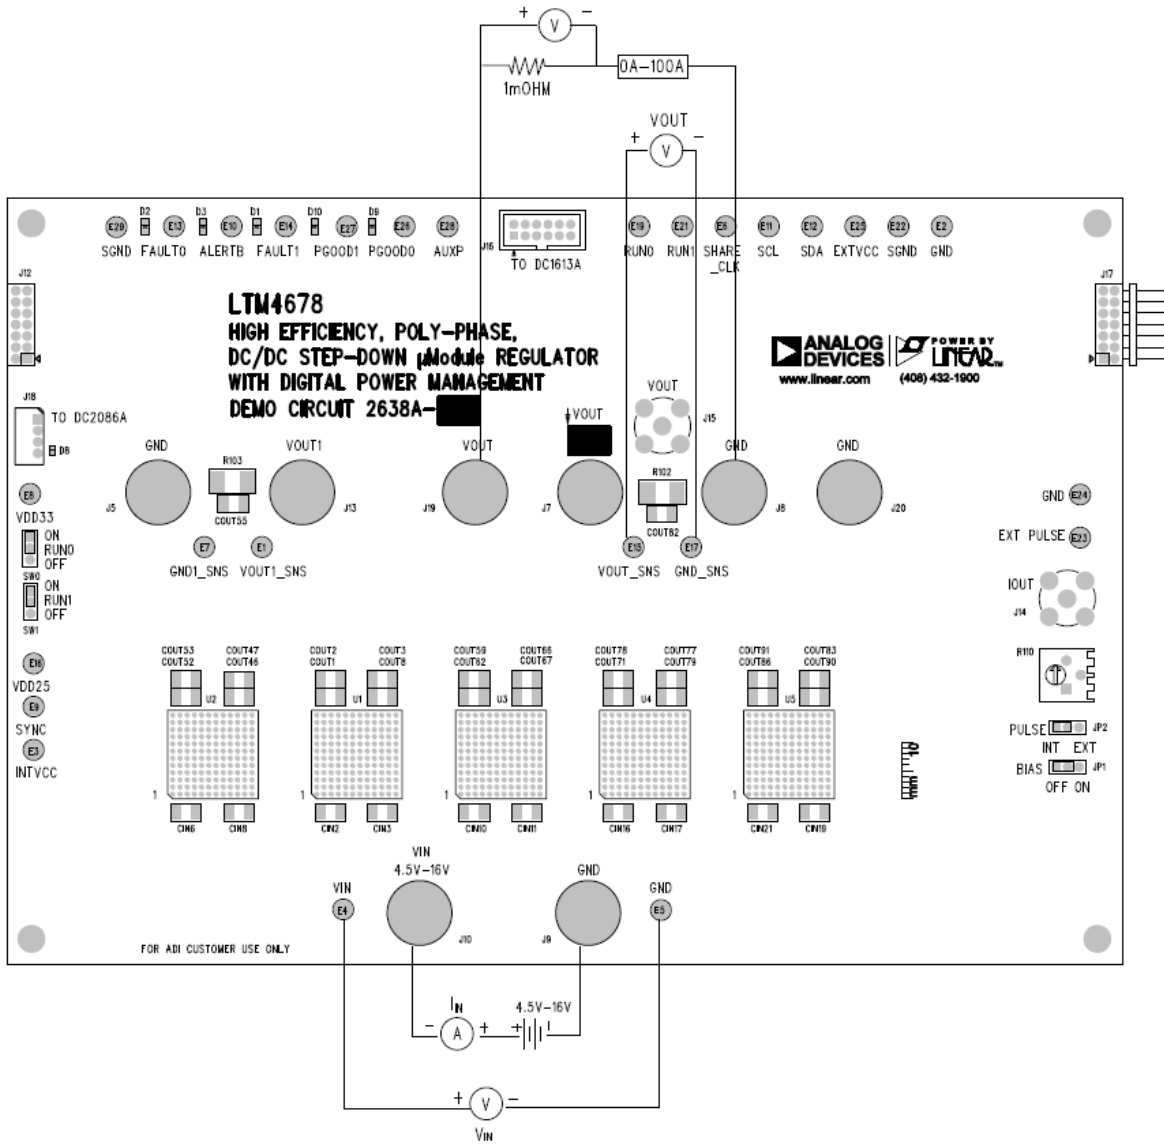


Figure 2. Proper Measurement Equipment Setup

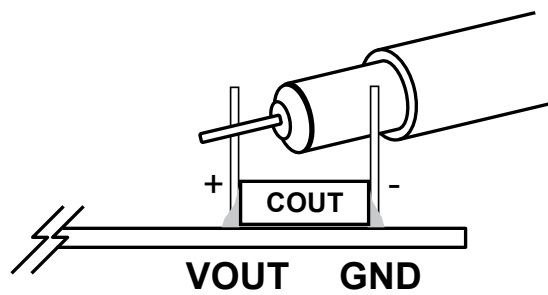


Figure 3. Measuring Output Voltage Ripple

QUICK START PROCEDURE

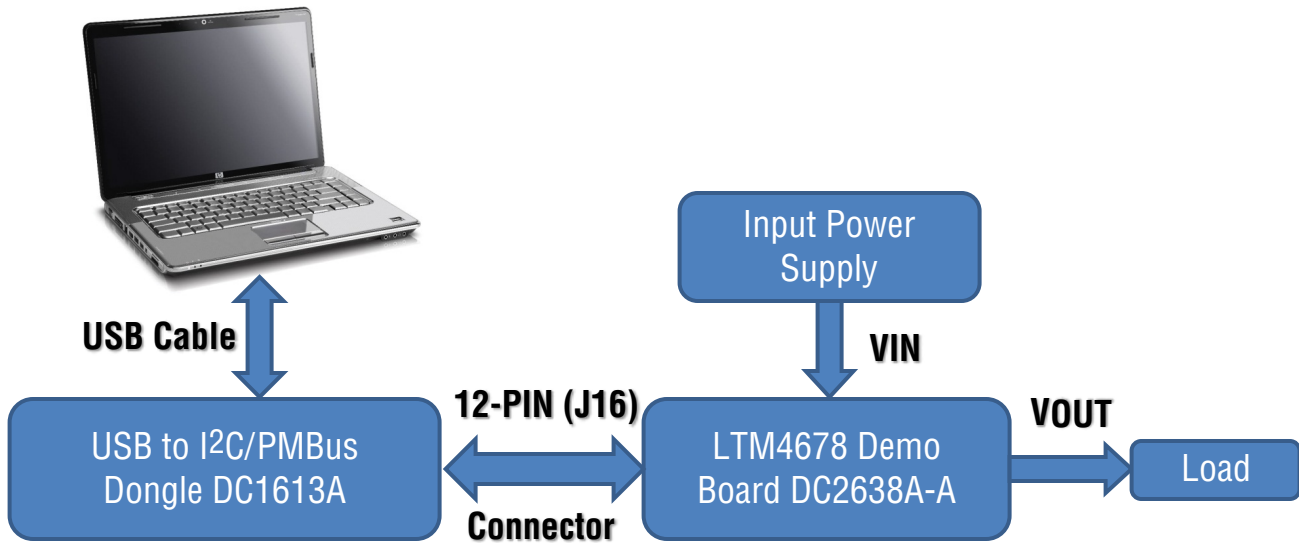


Figure 4. Demo Setup with PC

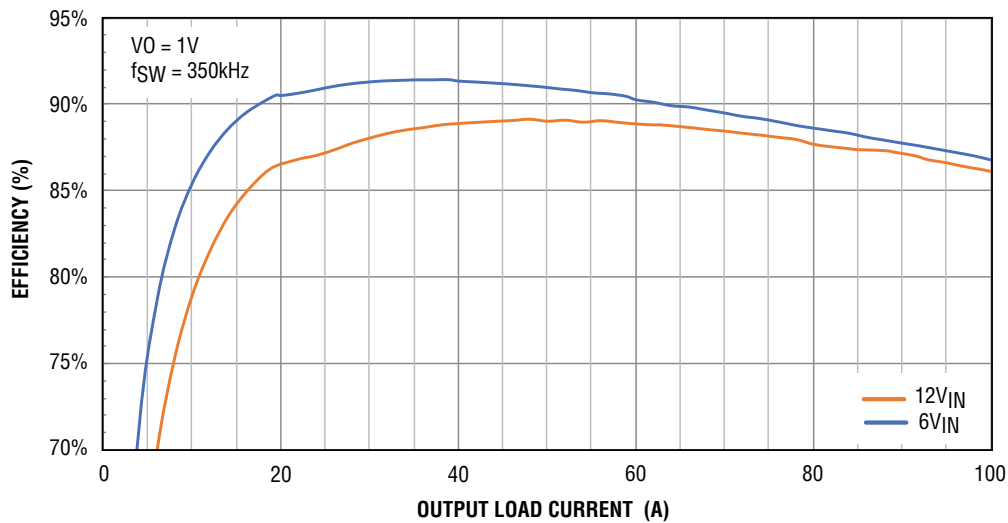


Figure 5. Efficiency vs Load Current

QUICK START PROCEDURE

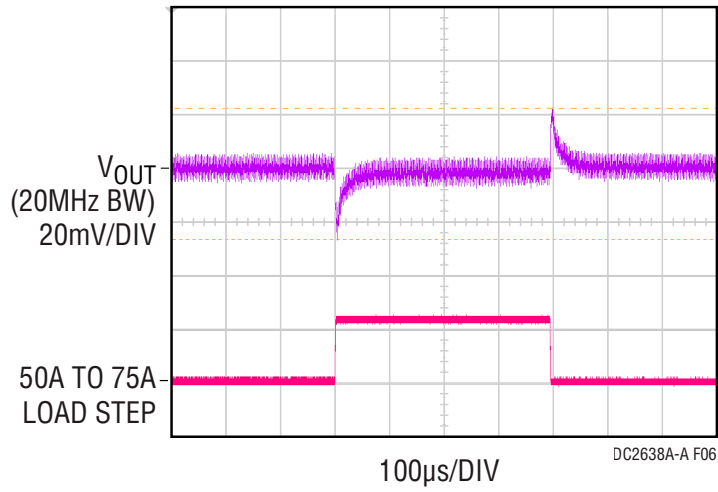


Figure 6. Output Voltage V_{OUT} vs Load Current @ $V_{IN} = 12V$, $V_{OUT} = 1V$, $f_{SW} = 350kHz$

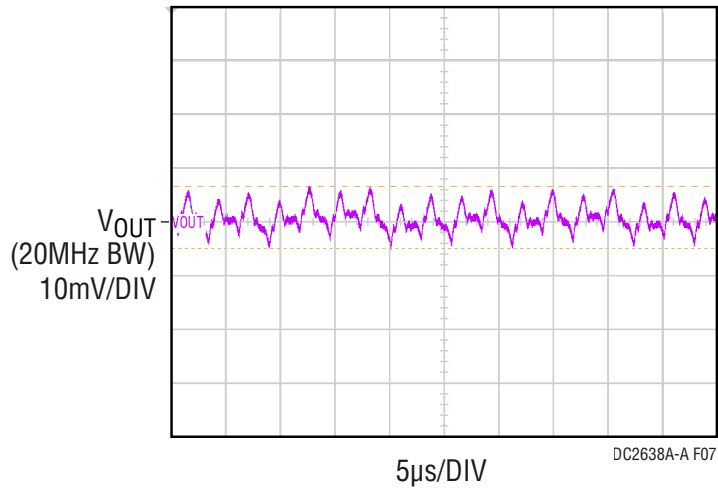


Figure 7. Output Voltage Ripple @ $V_{IN} = 12V$, $V_{OUT} = 1V$, $I_{OUT} = 100A$, $f_{SW} = 350kHz$

QUICK START PROCEDURE

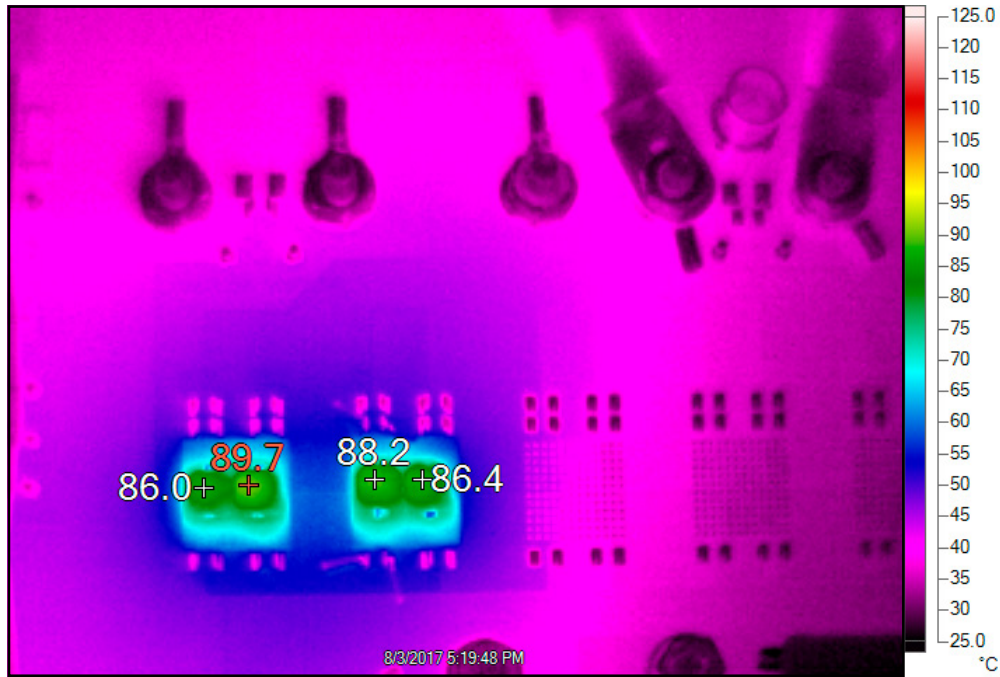


Figure 8. Thermal @ $V_{IN} = 12V$, $V_{OUT} = 1.0V$, $I_{OUT} = 78A$, $T_A = 25^\circ C$, No Airflow

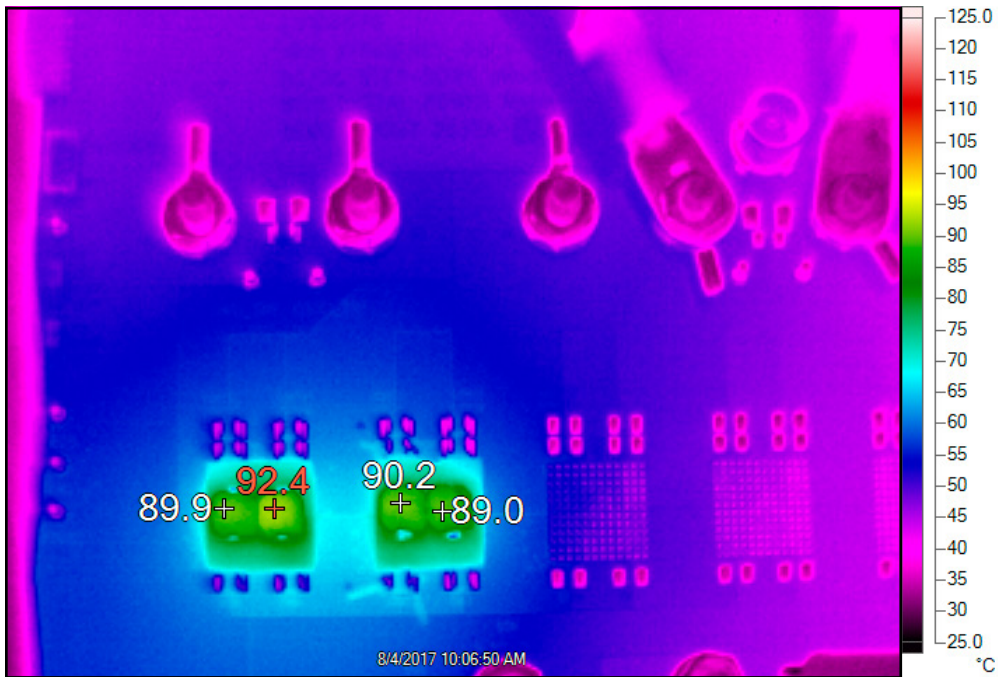


Figure 9. Thermal @ $V_{IN} = 12V$, $V_{OUT} = 1.0V$, $I_{OUT} = 100A$, $T_A = 25^\circ C$, 400LFM Airflow

LTPOWERPLAY SOFTWARE GUI

LTpowerPlay is a powerful Windows-based development environment that supports Analog Devices power system management ICs and μ Modules, including the LTM4675, LTM4676, LTM4677, LTM4678, LTC3880, LTC3882 and LTC3883. The software supports a variety of different tasks. You can use LTpowerPlay to evaluate Analog Devices ICs by connecting to a demo board system. LTpowerPlay can also be used in an offline mode (with no hardware present) in order to build a multichip configuration file that can be saved and reloaded at a later time. LTpowerPlay provides unprecedented diagnostic and debug features. It becomes a valuable diagnostic tool during board bringup to program or tweak the power management scheme in a system, or to diagnose power issues when bringing up rails. LTpowerPlay utilizes the

DC1613A USB-to-SMBus controller to communicate with one of many potential targets, including the LTM4675, LTM4676, LTM4677, LTM4678, LTC3880, LTC3882, LTC3883's demo system, or a customer board. The software also provides an automatic update feature to keep the software current with the latest set of device drivers and documentation. The LTpowerPlay software can be downloaded from:

[LTpowerPlay](#)

To access technical support documents for ADI Digital Power Products visit the LTpowerPlay Help menu. Online help also available through the LTpowerPlay.

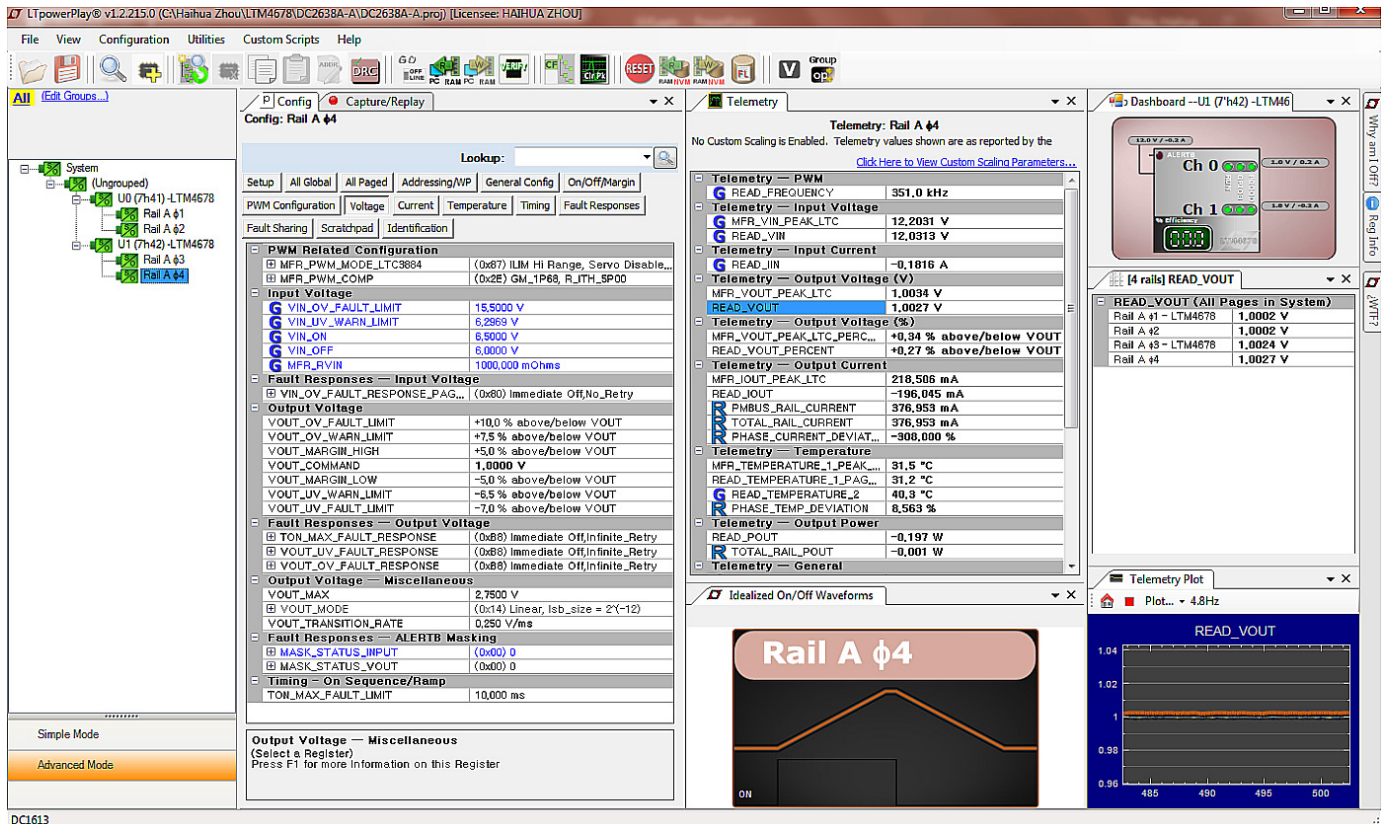


Figure 10. LTpowerPlay Main Interface

DEMO MANUAL DC2638A-A

LTPowerPLAY QUICK START PROCEDURE


The following procedure describes how to use LTpowerPlay to monitor and change the settings of LTM4678.

1. Download and install the LTpowerPlay GUI:


[LTpowerPlay](#)

2. Launch the LTpowerPlay GUI.

a. The GUI should automatically identify the DC2638A-A. The system tree on the left hand side should look like this:

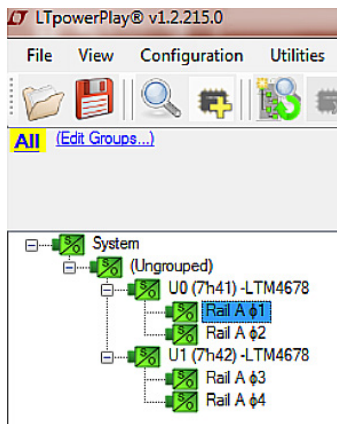


b. A green message box shows for a few seconds in the lower left hand corner, confirming that LTM4678 is communicating:

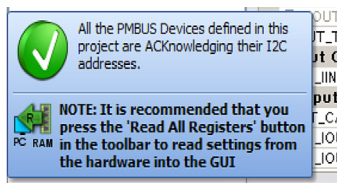

c. In the Toolbar, click the “R” (RAM to PC) icon to read the RAM from the LTM4678. This reads the configuration from the RAM of LTM4678 and loads it into the GUI.




d. If you want to change the output voltage to a different value, like 0.8V. In the Config tab, type in 0.8 in the VOUT_COMMAND box, like this:

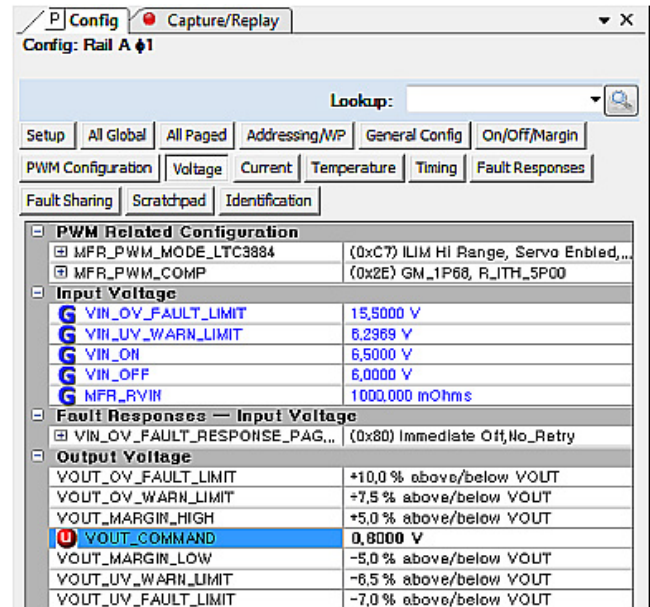

Then, click the “W” (PC to RAM) icon to write these register values to the LTM4678. After finishing this step, you will see the output voltage will change to 0.8V.



If the write is successful, you will see the following message:




e. You can save the changes into the NVM. In the tool bar, click “RAM to NVM” button, as following



f. Save the demo board configuration to a (*.proj) file. Click the Save icon and save the file. Name it whatever you want.

SCHEMATIC DIAGRAM

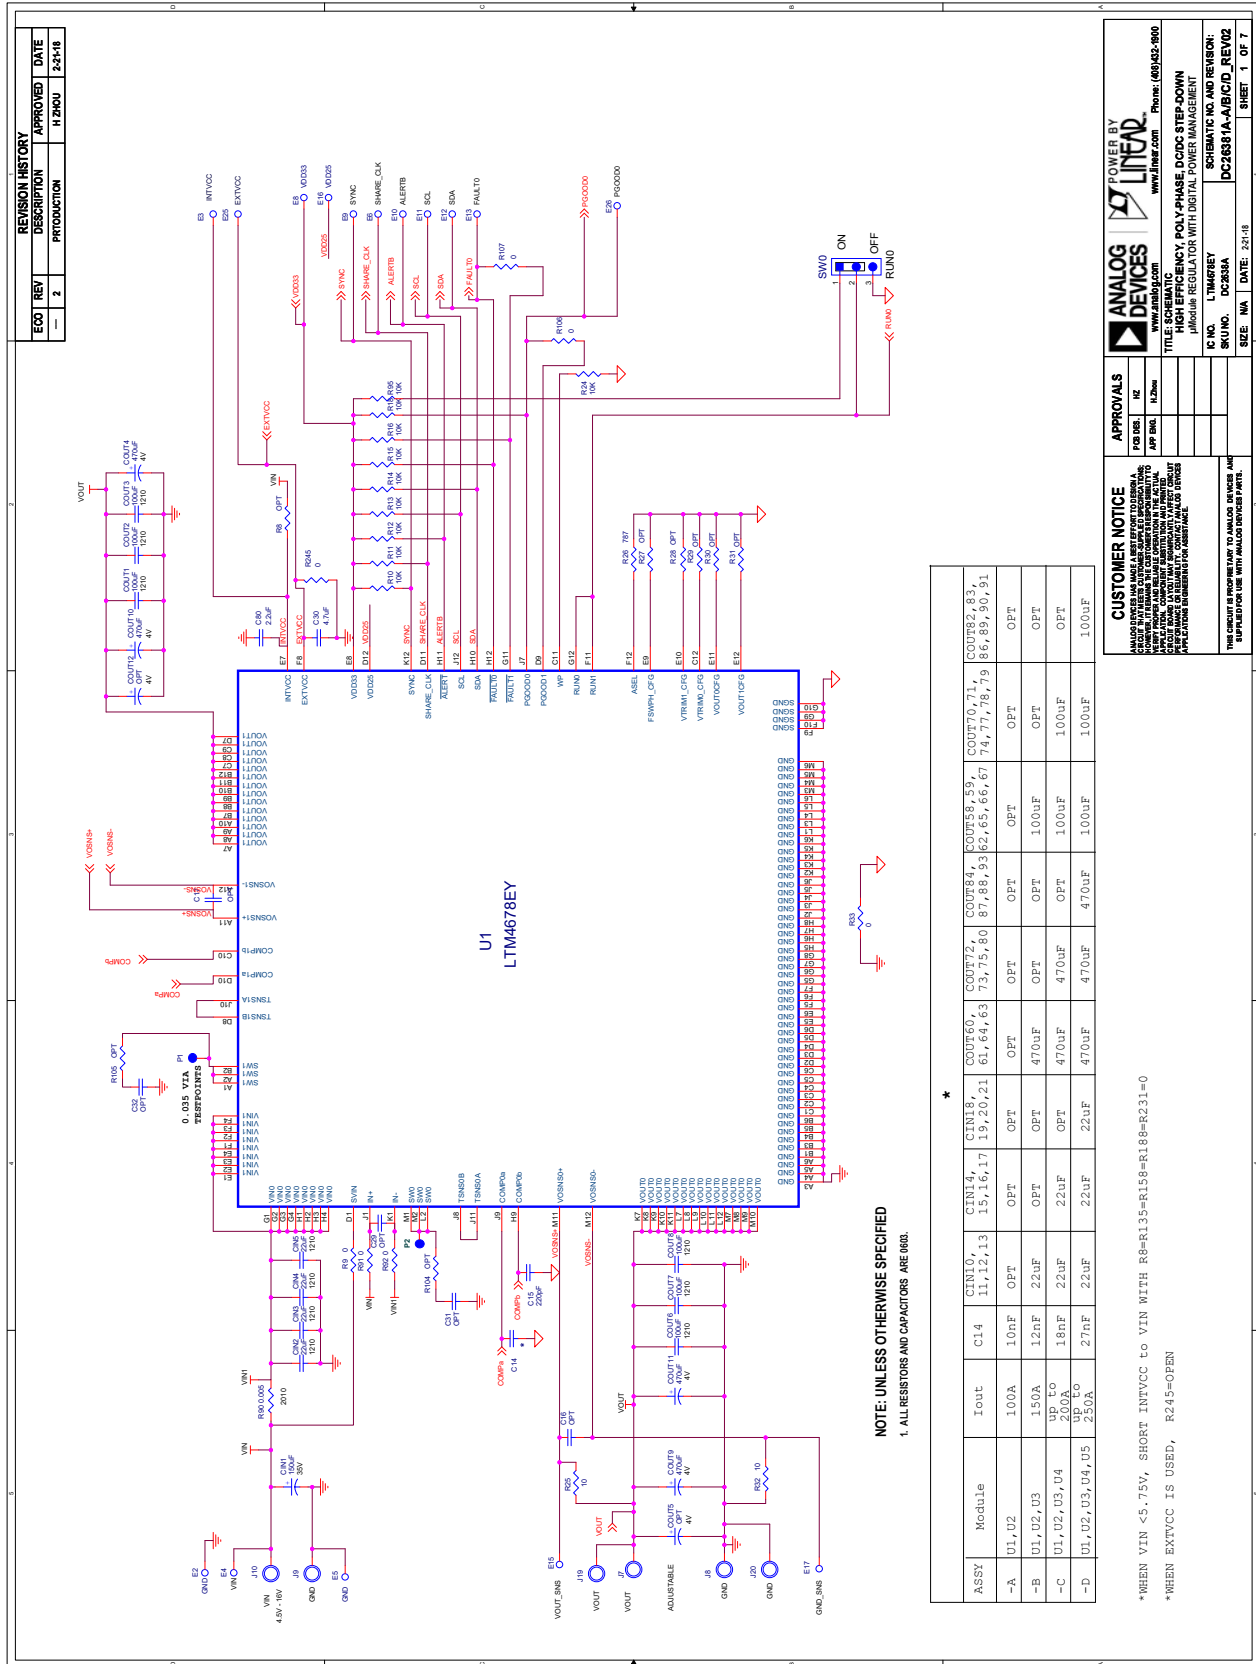

ECO	REV	DESCRIPTION	APPROVED	DATE
—	2	PRODUCTION		11/20/18

POWER BY ANALOG DEVICES
www.analog.com

LINEAR
www.linear.com

Ph: (800) 424-9000

TITLE: SCHEMATIC
POLY-PHASE DOCS STEP-DOWN
ADJUSTABLE VOLTAGE REGULATOR WITH DIGITAL POWER MANAGEMENT

IC NO. LTM4878EY
SKU NO. DC2638A

SCHEMATIC NO. AND REVISION:
DC2638A-A-UB/C/D_REV/02

SEE: N/A **DATE: 2/21/18** **SHEET: 1 OF 7**

CUSTOMER NOTICE


THIS SCHEMATIC IS PROVIDED AS A GUIDE ONLY. THE ACTUAL PARTS LIST AND BOARD LAYOUT MAY VARY FROM THE SCHEMATIC. THE CUSTOMER IS RESPONSIBLE FOR VERIFYING THE PARTS LIST AND BOARD LAYOUT. THE CUSTOMER IS RESPONSIBLE FOR VERIFYING THE PARTS LIST AND BOARD LAYOUT. THE CUSTOMER IS RESPONSIBLE FOR VERIFYING THE PARTS LIST AND BOARD LAYOUT.

© 2018 ANALOG DEVICES INC. ALL RIGHTS RESERVED. THIS DOCUMENT IS UNCLASSIFIED.



DEMO MANUAL DC2638A-A

SCHEMATIC DIAGRAM

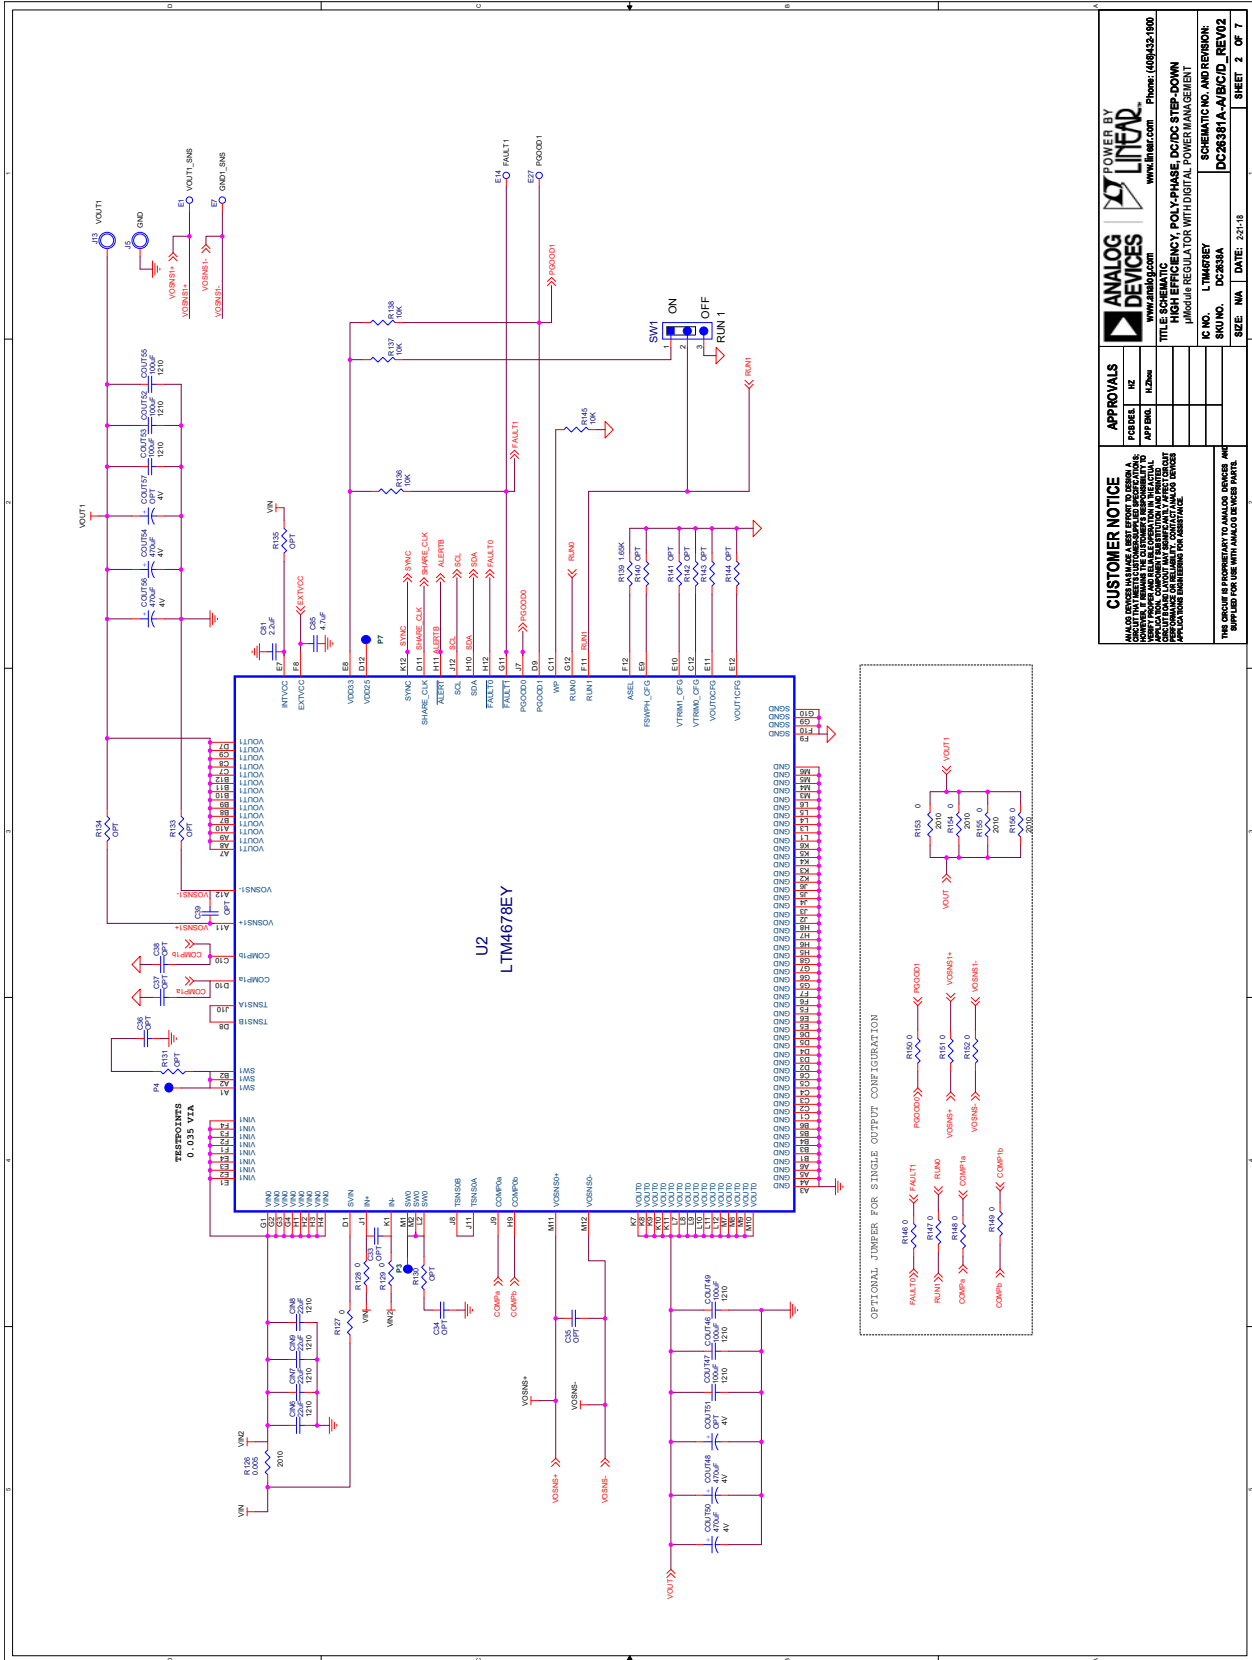


APPROVALS PCBDES1: [] APP ENG: []	TITLE SCHEMATIC PART NUMBER: DC2638A-A PART NAME: MONOLITHIC REGULATOR WITH DIGITAL POWER MANAGEMENT	K NO. LTM4678EY SKU NO. DC2638A-A-ABC/D_REV02 DATE: 2/21/18	SCHEMATIC AND REVISED DC2638A-A-ABC/D_REV02 SHEET 2 OF 7

CUSTOMER NOTICE

ALL PARTS SHOWN IN THIS SCHEMATIC ARE THE STANDARD PARTS. ANY PARTS THAT ARE NOT SHOWN IN THIS SCHEMATIC ARE THE STANDARD PARTS. THE PARTS LIST IS THE AUTHORITY FOR THE PARTS. ANY PARTS THAT ARE NOT SHOWN IN THIS SCHEMATIC ARE THE STANDARD PARTS. THE PARTS LIST IS THE AUTHORITY FOR THE PARTS.


SCHEMATIC DIAGRAM

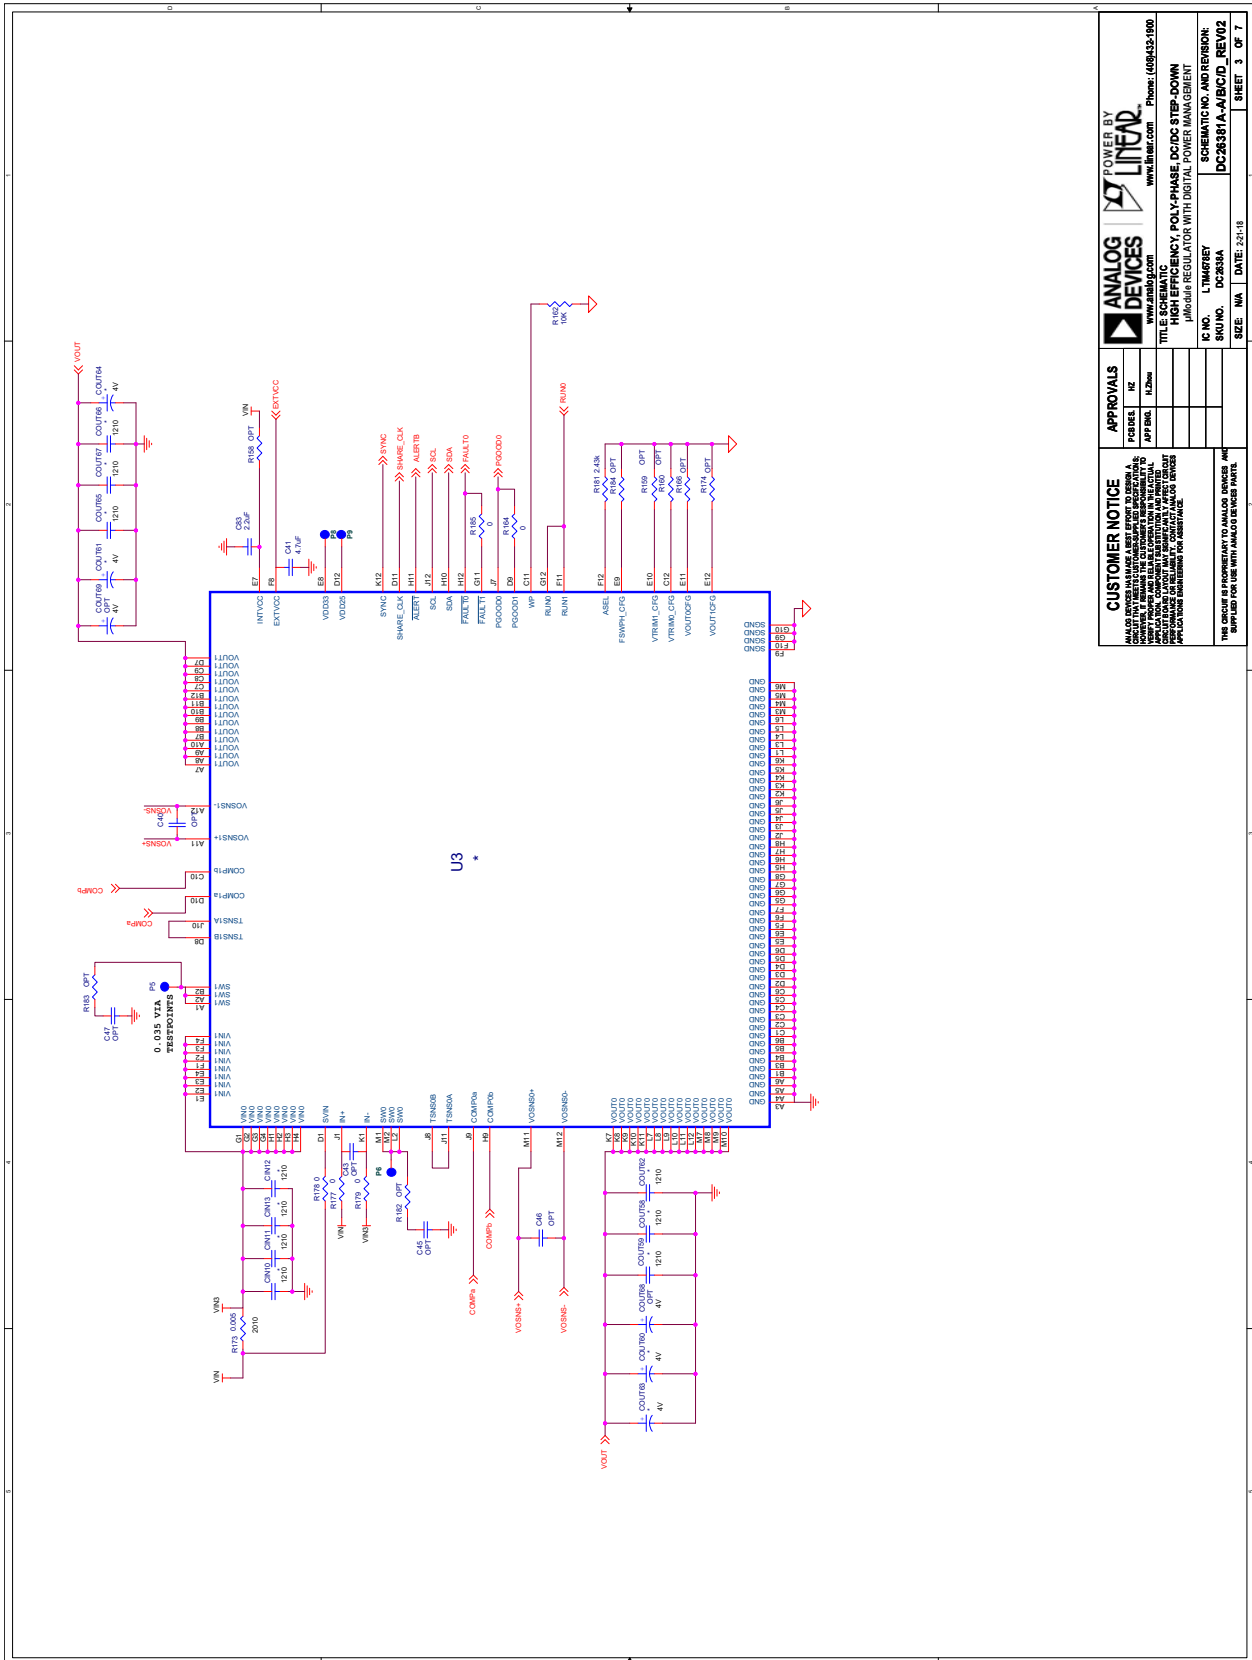

APPROVALS		POWER BY LINEAR	
DESIGNER	INZ	ANALOG DEVICES	www.analog.com
APP'NG	H. Zhou	TITLE SCHEMATIC	www.linear.com
		PHONE: (609) 433-1000	
		DESCRIPTION	EMERGENCY POLY-PHASE DC/DC STEP-DOWN
		FUNCTION	INTEGRATED POLY-PHASE DC/DC STEP-DOWN
		SCHEMATIC NO. AND REVISION	DC2638A-A-ABC/D, REV02
		DATE	2-21-16
		SHEET	3 OF 7

CUSTOMER NOTICE
 THIS SCHEMATIC IS PROVIDED AS A GUIDE ONLY. ANALOG DEVICES AND ITS SUPPLIERS MAKE NO WARRANTY, REPRESENTATION OR GUARANTEE, EXPRESS OR IMPLIED, REGARDING THE ACCURACY, COMPLETENESS, OR FITNESS FOR ANY PARTICULAR APPLICATION OF THIS SCHEMATIC. THE USER SHALL BE RESPONSIBLE FOR VERIFYING THE SCHEMATIC IS SUITABLE FOR THE INTENDED APPLICATION AND FOR OBTAINING NECESSARY APPROVALS FROM THE APPROPRIATE AUTHORITIES. ANALOG DEVICES AND ITS SUPPLIERS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS SCHEMATIC FOR ANY PURPOSE. APPLICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

SCHEMATIC DIAGRAM

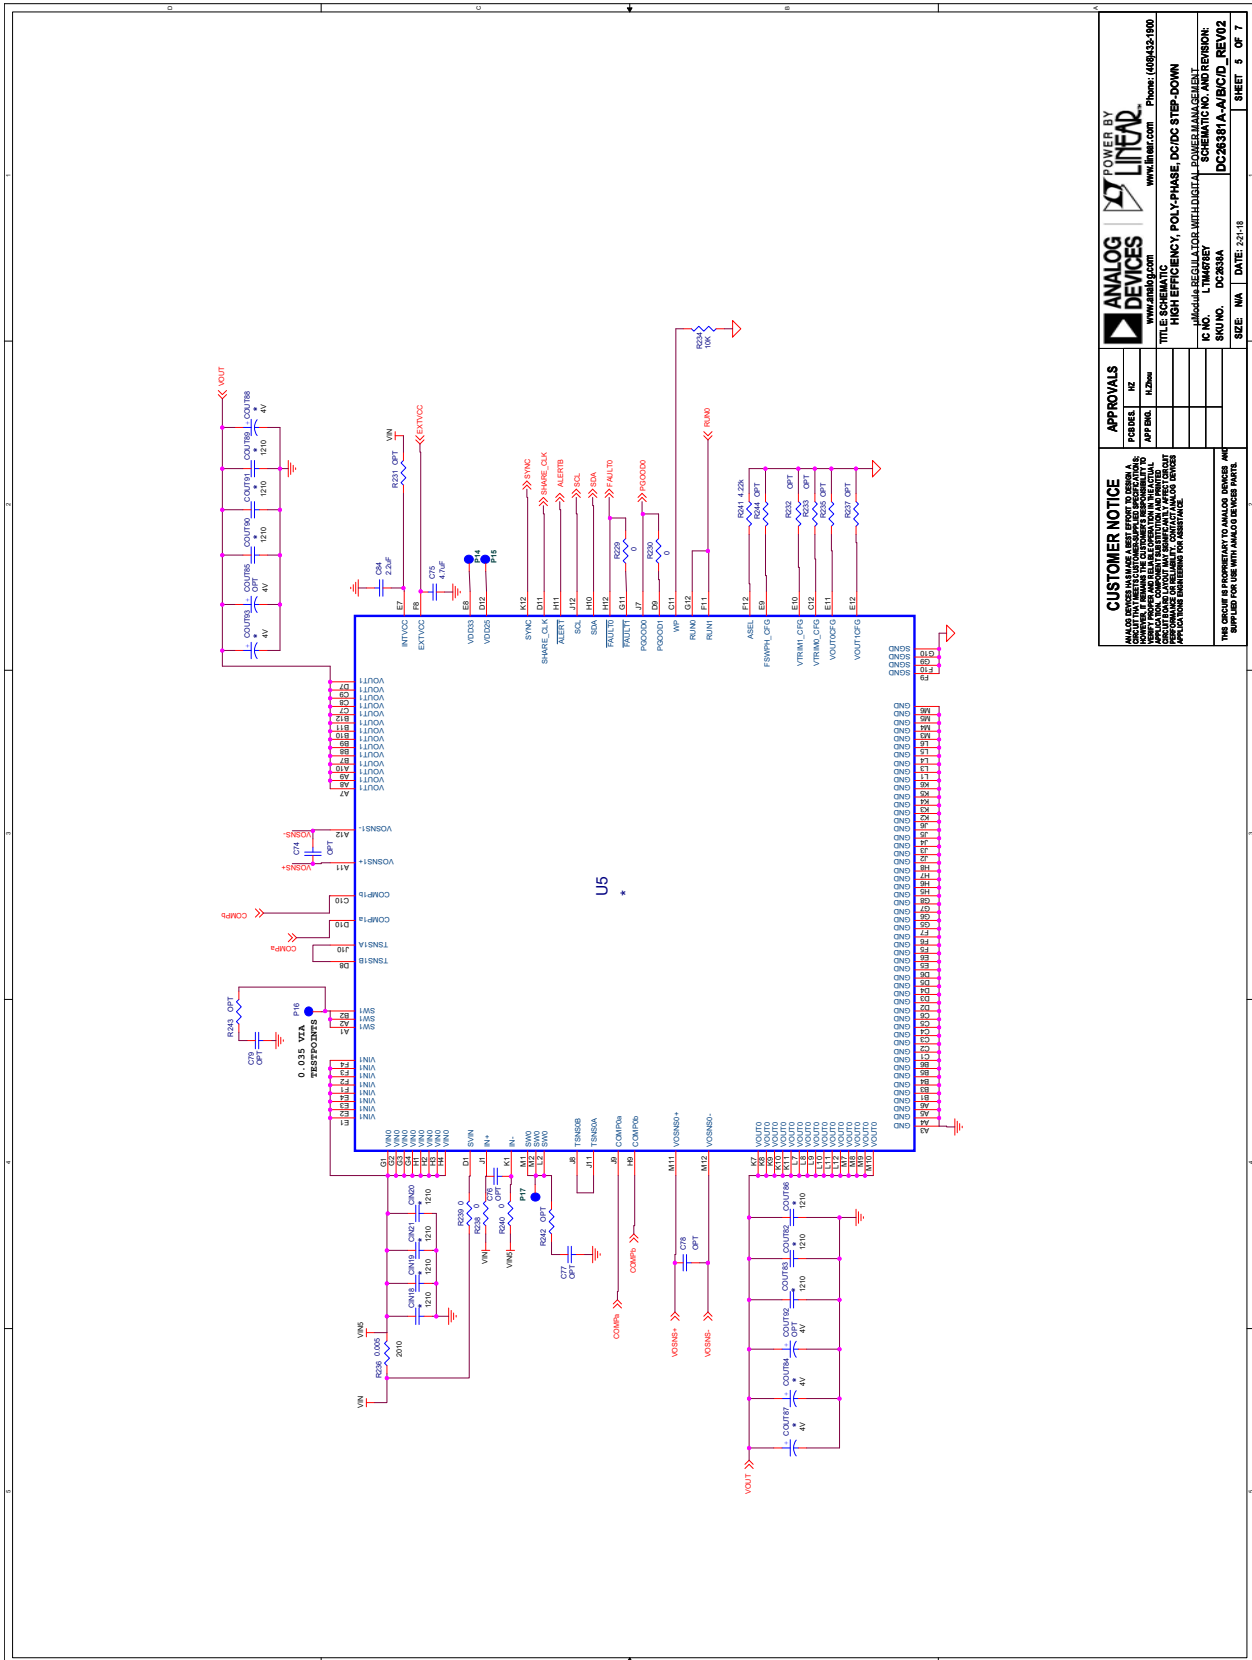


ANALOG DEVICES		POWER BY LINEAR	
www.analog.com		www.linear.com	
PHONE: (508) 435-1000		PHONE: (508) 435-1000	
FAX: (508) 435-1001		FAX: (508) 435-1001	
TITLE: SCHEMATIC		TITLE: SCHEMATIC	
HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN		HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN	
CONVERTER		CONVERTER	
SKU NO. DC2638A		SKU NO. DC2638A	
DATE: 2-11-10		DATE: 2-11-10	
SHEET 5 OF 7		SHEET 5 OF 7	

CUSTOMER NOTICE


THIS SCHEMATIC IS PROVIDED AS A GUIDE ONLY. ANALOG DEVICES AND LINEAR TECHNOLOGY DO NOT WARRANT THE ACCURACY OF THIS SCHEMATIC. THE USER SHALL BE RESPONSIBLE FOR VERIFYING THE SCHEMATIC AGAINST THE ACTUAL DEVICE. ANALOG DEVICES AND LINEAR TECHNOLOGY SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THIS SCHEMATIC.

SCHEMATIC DIAGRAM

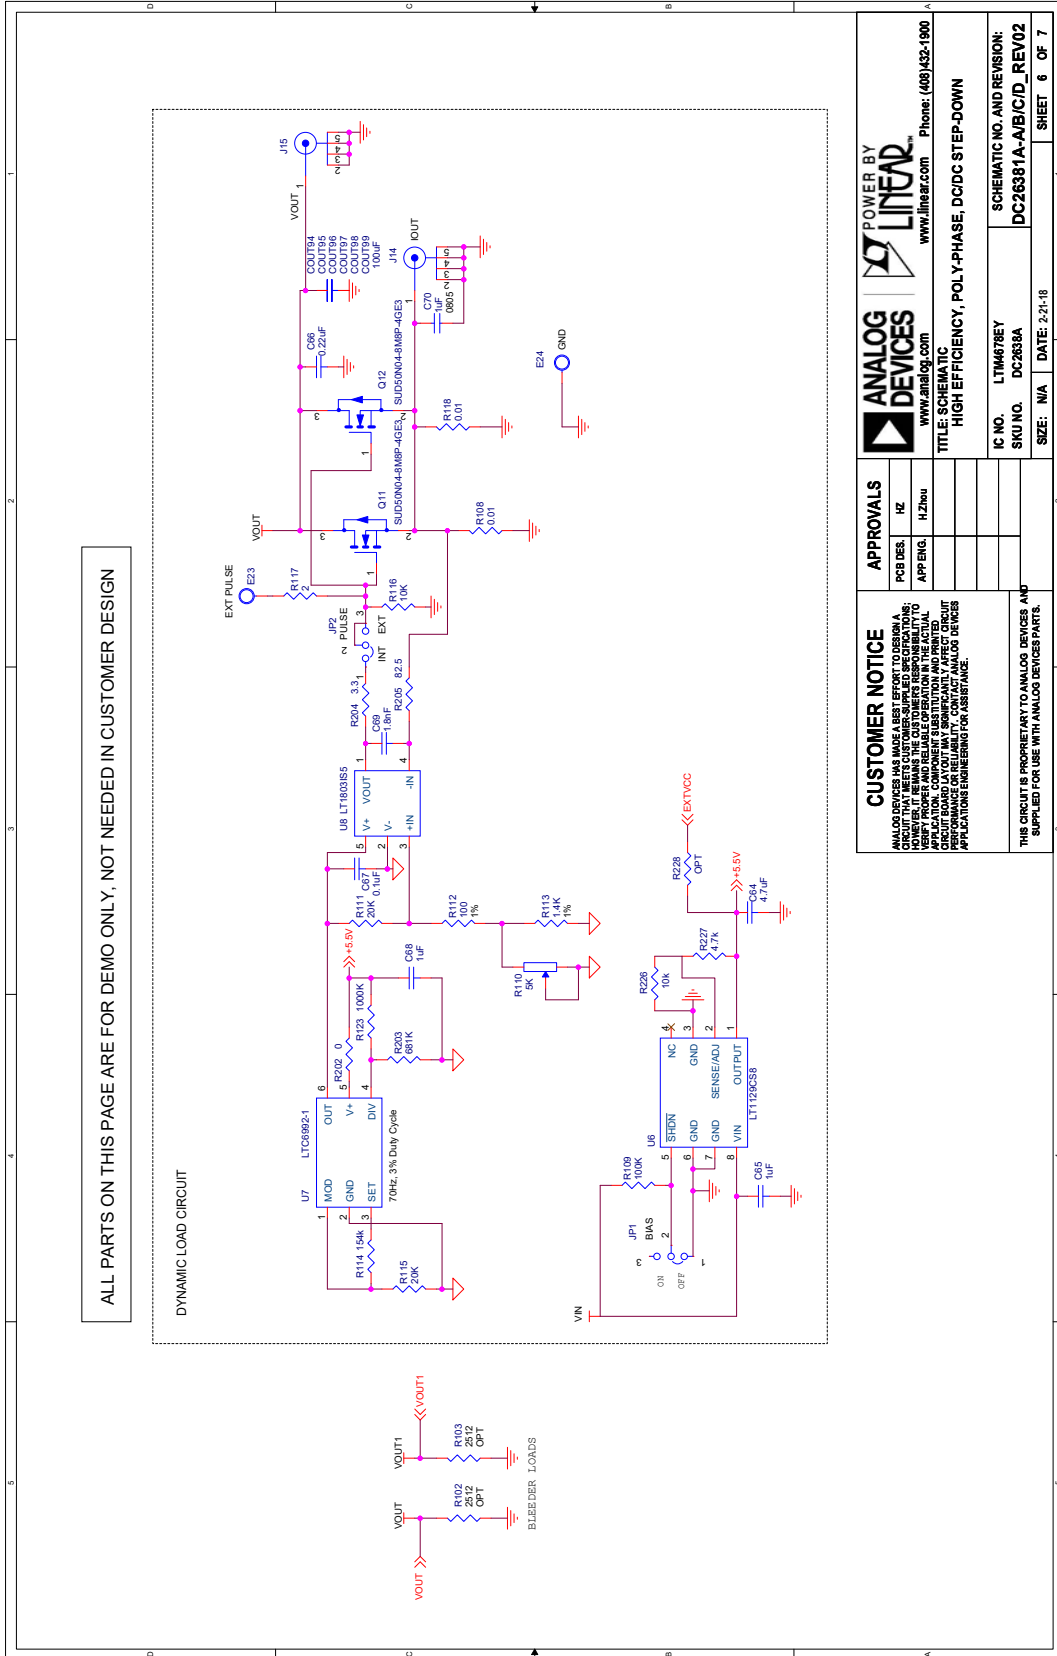

SCHEMATIC DIAGRAM

ALL PARTS ON THIS PAGE ARE FOR DEMO ONLY, NOT NEEDED IN CUSTOMER DESIGN

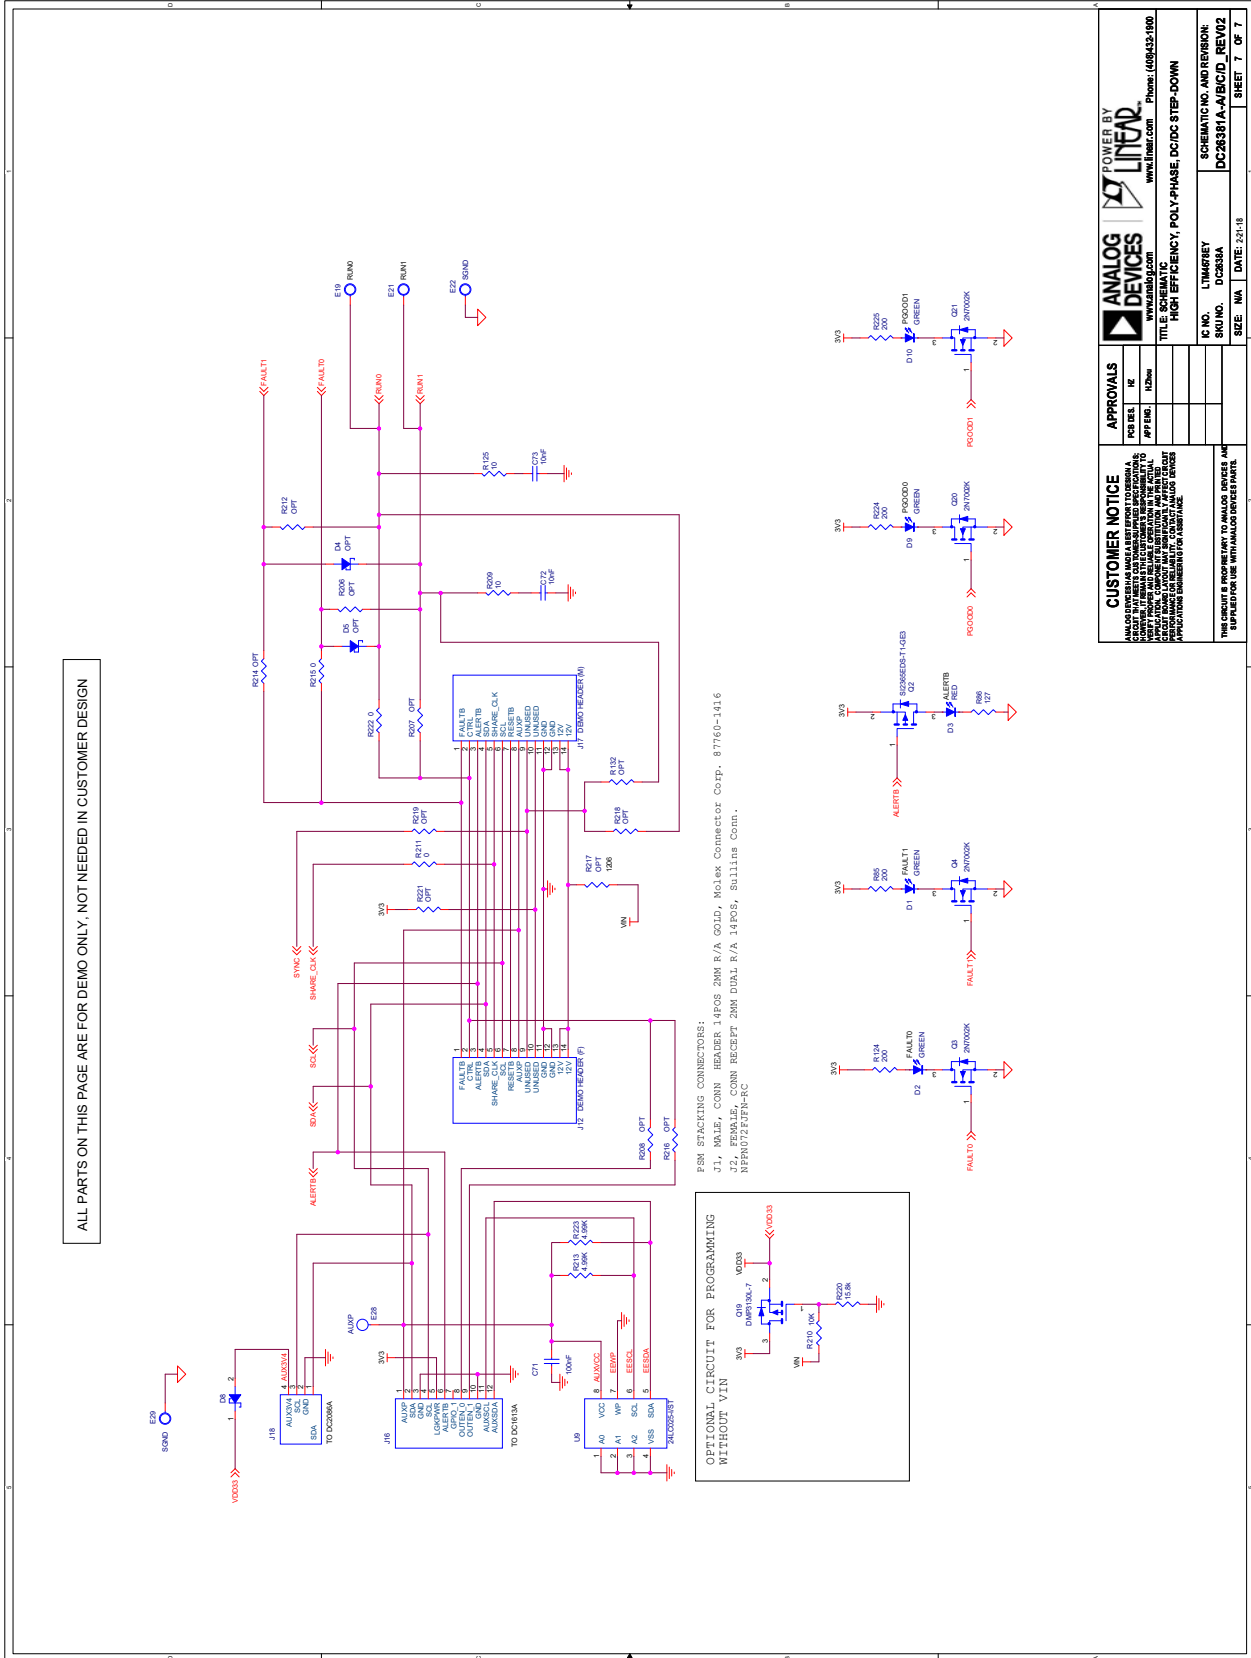

PSM STACKING CONNECTORS:
 J1, MALE, CONN HEADER 14POS 2MM R/A GOLD, Molex Connector Corp. 87760-1416
 J2, FEMALE, CONN RECEPT 2MM DUAL R/A 14POS, Sullins Conn. NPPH072F2FM-RC

APPROVALS		POWER BY LINEAR	
DESIGNER	IC	ANALOG DEVICES	www.analog.com
APP'D	11/2009	LINEAR	www.linear.com
TITLE: SCHEMATIC		PHONE: (609) 435-1800	
PROJECT EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN		SCHEMATIC NO. AND REVISION:	
KNO. LTM8754		DC26381A-A/B/C/D_REV02	
SEE: 10A	DATE: 2/21/16	SHEET: 7	OF: 7

CUSTOMER NOTICE
 THIS SCHEMATIC IS PROVIDED AS A GUIDE ONLY. ANALOG DEVICES AND ITS SUPPLIERS MAKE NO WARRANTY, REPRESENTATION OR GUARANTEE, EXPRESS OR IMPLIED, REGARDING THE ACCURACY, COMPLETENESS, OR SUITABILITY OF THIS INFORMATION FOR ANY PARTICULAR APPLICATION. CUSTOMERS ARE ADVISED TO VERIFY THE PART NUMBER AND PIN CONFIGURATION OF ALL COMPONENTS USED IN THIS SCHEMATIC. ANALOG DEVICES AND ITS SUPPLIERS SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PERSONS OR PROPERTY ARISING FROM THE USE OF THIS INFORMATION. ANALOG DEVICES AND ITS SUPPLIERS SHALL NOT BE RESPONSIBLE FOR ANY DAMAGE TO PERSONS OR PROPERTY ARISING FROM THE USE OF THIS INFORMATION.

DEMO MANUAL DC2638A-A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CIN1	CAP, 150μF, ALUM. ELECT., 35V, 20%, 8mm x10.2mm SMD, RADIAL, AEC-Q200	PANASONIC, EEHZA1V151P
2	18	COU1, COU2, COU3, COU6, COU7, COU8, COU46, COU47, COU49, COU52, COU53, COU55, COU94, COU95, COU96, COU97, COU98, COU99	CAP, 100μF, X5R, 6.3V, 20%, 1210	AVX, 12106D107MAT2A
3	8	CIN2, CIN3, CIN4, CIN5, CIN6, CIN7, CIN8, CIN9	CAP, 22μF, X5R, 25V, 10%, 1210	AVX, 12103D226KAT2A
4	8	COU4, COU9, COU10, COU11, COU48, COU50, COU54, COU56	CAP, 470μF, TANT. POSCAP, 4V, 20%, 7343, 10mΩ, TPE, NO SUBS. ALLOWED	PANASONIC, 4TPF470ML
5	1	C14	CAP, 0.01μF, X7R, 16V, 10%, 0603	AVX, 0603YC103KAT2A
6	1	C15	CAP, 220pF, X7R, 16V, 10%, 0603	AVX, 0603YC221KAT2A
7	6	C30, C41, C49, C64, C75, C85	CAP, 4.7μF, X5R, 25V, 10%, 0603, NO SUBS. ALLOWED	MURATA, GRM188R61E475KE11D
8	2	C65, C68	CAP, 1μF, X7R, 25V, 10%, 1206	AVX, 12063C105KAT2A
9	1	C66	CAP, 0.22μF, X5R, 25V, 10%, 0805	AVX, 08053D224KAT2A
10	1	C67	CAP, 0.1μF, X7R, 25V, 10%, 1206	AVX, 12063C104KAT2A
11	1	C69	CAP, 1800pF, X7R, 16V, 10%, 0603	AVX, 0603YC182KAT2A
12	1	C70	CAP, 1μF, X5R, 25V, 10%, 0805	AVX, 08053D105KAT2A
13	1	C71	CAP, 0.1μF, X7R, 25V, 10%, 0603	AVX, 06033C104KAT2A
14	2	C72, C73	CAP, 0.01μF, X7R, 25V, 10%, 0603	AVX, 06033C103KAT2A
15	5	C80, C81, C82, C83, C84	CAP, 2.2μF, X7R, 25V, 10%, 0603	MURATA, GRM188Z71E225KE43D
16	1	D8	DIODE, SCHOTTKY RECT., 20V, 0.5A, SOD-882D, LEADLESS, 2-TERM.	NEXPERIA, PMEG2005AELD,315
17	1	Q2	XSTR., MOSFET, P-CH, 20V, 5.9A, TO-236 (SOT23-3)	VISHAY, SI2365EDS-T1-GE3
18	4	Q3, Q4, Q20, Q21	XSTR., MOSFET, SINGLE N-CH, 60V, 380mA, SOT23-3, AEC-Q101	ON SEMICONDUCTOR, 2N7002KT1G
19	2	Q11, Q12	XSTR., MOSFET, N-CH, 40V, TO-252 (DPAK)	VISHAY, SUD50N04-8M8P-4GE3
20	1	Q19	XSTR., MOSFET, P-CH, 30V, 3.5A, SOT23-3, AEC-Q101	DIODES INC., DMP3130L-7
21	36	R9, R33, R91, R92, R106, R107, R127, R128, R129, R146, R147, R148, R149, R150, R151, R152, R164, R177, R178, R179, R185, R186, R187, R195, R196, R197, R202, R211, R215, R222, R229, R230, R238, R239, R240, R245	RES., 0Ω, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06030000Z0EA

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
22	20	R10, R11, R12, R13, R14, R15, R16, R18, R24, R95, R116, R136, R137, R138, R145, R162, R191, R210, R226, R234	RES., 10k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW060310K0FKEA
23	4	R25, R32, R125, R209	RES., 10Ω, 1%, 1/10W, 0603	VISHAY, CRCW060310R0FKEA
24	1	R26	RES., 787Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603787RFKEA
25	4	R85, R124, R224, R225	RES., 200Ω, 1%, 1/10W, 0603	VISHAY, CRCW0603200RFKEA
26	1	R86	RES., 127Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603127RFKEA
27	5	R90, R126, R173, R193, R236	RES., 0.005Ω, 1%, 1/2W, 2010, SENSE, AEC-Q200	VISHAY, WSL20105L000FEA
28	2	R108, R118	RES., 0.01Ω, 1%, 1/2W, 2010, SENSE, AEC-Q200	VISHAY, WSL2010R0100FEA
29	1	R109	RES., 100k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603100KFKEA
30	1	R110	RES., 5k, 10%, 1/2W, THT 3/8 SQ, 1-TURN, TOP ADJ., TRIMPOT	
31	2	R111, R115	RES., 20k, 1%, 1/10W, 0603	VISHAY, CRCW060320K0FKEA
32	1	R112	RES., 100Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603100RFKEA
33	1	R113	RES., 1.4k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06031K40FKEA
34	1	R114	RES., 154k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603154KFKEA
35	1	R117	RES., 2Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06032R00FKEA
36	1	R123	RES., 1MΩ, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06031M00FKEA
37	1	R139	RES., 1.65k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06031K65FKEA
38	4	R153, R154, R155, R156	RES., 0Ω, 3/4W, 2010, AEC-Q200	VISHAY, CRCW20100000Z0EF
39	1	R181	RES., 2.43k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06032K43FKEA
40	1	R198	RES., 3.24k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06033K24FKEA
41	1	R203	RES., 681k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW0603681KFKEA
42	1	R204	RES., 3.3Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06033R30FKEA
43	1	R205	RES., 82.5Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW060382R5FKEA
44	2	R213, R223	RES., 4.99k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06034K99FKEA
45	1	R220	RES., 15.8k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW060315K8FKEA
46	1	R227	RES., 4.7k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06034K70FKEA
47	1	R241	RES., 4.22k, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06034K22FKEA
48	2	U1, U2	IC, DUAL 25A POP PSM MODULE, BGA-144	ANALOG DEVICES, LTM4678EY#PBF
49	1	U6	IC, 700mA μPower LDO WITH SHUTDOWN, SO-8	ANALOG DEVICES, LT1129CS8#PBF
50	1	U7	IC, TIMERBLOX: VOLTAGE-CTRL. PWM, TSOT23-6	ANALOG DEVICES, LTC6992CS6-1#PBF
51	1	U8	IC, SINGLE R TO R IN/OUT OP AMP, TSOT23-5, 100V/μs, 85MHz	ANALOG DEVICES, LT1803IS5#PBF
52	1	U9	IC, MEMORY, EEPROM, 2Kb (256x8), TSSOP-8, 400kHz	MICROCHIP, 24LC025-I/ST

DEMO MANUAL DC2638A-A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Additional Demo Board Circuit Components				
1	0	COUT5, COUT12, COUT51, COUT57, COUT60, COUT61, COUT63, COUT64, COUT68, COUT69, COUT72, COUT73, COUT75, COUT76, COUT80, COUT81, COUT84, COUT85, COUT87, COUT88, COUT92, COUT93	CAP, OPTION, D3L	
2	0	CIN10, CIN11, CIN12, CIN13, CIN14, CIN15, CIN16, CIN17, CIN18, CIN19, CIN20, CIN21, COUT58, COUT59, COUT62, COUT65, COUT66, COUT67, COUT70, COUT71, COUT74, COUT77, COUT78, COUT79, COUT82, COUT83, COUT86, COUT89, COUT90, COUT91	CAP, OPTION, 1210	
3	0	C16, C17, C29, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C43, C45, C46, C47, C48, C50, C51, C52, C53, C74, C76, C77, C78, C79	CAP, OPTION, 0603	
4	0	D4, D5	DIODE, OPTION, SOD-323	
5	0	R8, R27, R28, R29, R30, R31, R104, R105, R130, R131, R132, R133, R134, R135, R140, R141, R142, R143, R144, R158, R159, R160, R166, R174, R182, R183, R184, R188, R189, R190, R192, R194, R199, R200, R201, R206, R207, R208, R212, R214, R216, R218, R219, R221, R228, R231, R232, R233, R235, R237, R242, R243, R244	RES., OPTION, 0603	
6	0	R102, R103	RES., OPTION, 2512	
7	0	R217	RES., OPTION, 1206	
8	0	U3, U4, U5	IC., OPTION, BGA-144	
9	0		PCA ASSY DWG, DC2638A	
Hardware: For Demo Board Only				
1	4	D1, D2, D9, D10	LED, GREEN, WATERCLEAR, 0603	WURTH ELEKTRONIK, 150060GS75000
2	1	D3	LED, SUPER RED, WATERCLEAR, 0603	WURTH ELEKTRONIK, 150060SS75000
3	27	E1, E2, E3, E4, E5, E6, E7, E8, E9, E10, E11, E12, E13, E14, E15, E16, E17, E20, E21, E22, E23, E24, E25, E26, E27, E28, E29	TEST POINT, TURRET, 0.064", MTG. HOLE	MILL-MAX, 2308-2-00-80-00-00-07-0
4	2	JP1, JP2	CONN., HDR, MALE, 1x3, 2mm, VERT, STR, THT	WURTH ELEKTRONIK, 62000311121
5	8	J5, J7, J8, J9, J10, J13, J19, J20	WASHER, FLAT, STEEL, ZINC PLATE, OD: 0.436 [11.1]	KEYSTONE, 4703
6	16	J5, J7, J8, J9, J10, J13, J19, J20	NUT, HEX, STEEL, ZINC PLATE, 10-32	KEYSTONE, 4705
7	8	J5, J7, J8, J9, J10, J13, J19, J20	STUD, FASTENER, #10-32	PENNINGENGINEERING, KFH-032-10ET
8	8	J5, J7, J8, J9, J10, J13, J19, J20	RING, LUG, CRIMP, #10, NON-INSULATED, SOLDERLESS TERMINALS	KEYSTONE, 8205
9	1	J12	CONN., HDR, FEMALE, 2x7, 2mm, R/A THT	SULLINS CONNECTOR SOLUTIONS, NPPN072FJFN-RC

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Hardware: For Demo Board Only				
10	2	J14, J15	CONN., RF, BNC, RCPT JACK, 5-PIN, STR, THT, 50Ω	AMPHENOL RF, 112404
11	1	J16	CONN., SHROUDED HDR, MALE, 2x6, 2mm, VERT, STR, THT	FCI, 98414-G06-12ULF
12	1	J17	CONN., HDR, MALE, 2x7, 2mm, R/A THT	MOLEX, 0877601416
13	2	SW0, SW1	CONN., HDR., MALE, 1x3, 2mm, VERT, STR, THT, 10μ Au	SAMTEC, TMM-103-02-L-S
14	1	J18	CONN., SHROUDED HDR, MALE, 1x4, 2mm, VERT, STR, THT	HIROSE ELECTRIC, DF3A-4P-2DSA
15	1	LB1	LABEL SPEC, DEMO BOARD SERIAL NUMBER	BRADY, THT-96-717-10
16	4	MH1, MH2, MH3, MH4	STANDOFF, NYLON, SNAP-ON, 0.50"	WURTH ELEKTRONIK, 702935000
17	2	XJP1, XJP2	CONN., SHUNT, FEMALE, 2 POS, 2mm	WURTH ELEKTRONIK, 60800213421
18	1		TOOL, STENCIL, 700-DC2638A	ANALOG DEVICES, 830-DC2638A
19	1		PCB, DC2638A	MAO BANG, 600-DC2638A



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.