

# ANT-LTE-MON-SMA

## Data Sheet



### Product Description

The Linx MON Series LTE antenna is a high-end design that provides excellent performance in a tiny package. It offers higher efficiency at the lower frequency bands on a smaller ground plane than competitive products. This equates to better range in a smaller product size, saving valuable real estate in the design. The tilt and swivel joint design allows for the antenna to be positioned for optimum performance in the product or folded against the enclosure for shipping or transport. This durable and versatile design also reduces any damage from impact force compared to a fixed design.

This combination of high performance and small size makes the MON Series ideal for small devices, particularly when used for the Internet of Things (IoT) and with the CAT-M1 and NB-IOT standards. Also covering all major bands used by LTE, 3G and 4G cellular technologies, the MON Series is backed by the thorough testing and validation and rigorous quality control that Linx is known for.



### Features

- Covers all common 4G/3G/2G and LTE bands
- Tilt / Swivel Joint for optimum positioning
- Small, unobtrusive profile

### Ordering Information


ANT-LTE-MON-SMA

### Electrical Specifications

| Electrical Specifications   |                        |                    |             |             |             |             |
|-----------------------------|------------------------|--------------------|-------------|-------------|-------------|-------------|
| Parameter                   | LTE/ GSM850/<br>GSM900 | DCS/ PCS/<br>UMTS1 | LTE 2300    | LTE 2600    | LTE3500     | LTE3700     |
| Recommended Frequency Range | 698 – 960              | 1710 – 2170        | 2300 – 2400 | 2500 – 2700 | 3400 – 3600 | 3600 – 3800 |
| VSWR (typical at center)    | <2.5:1                 | <3.5:1             | <4.6:1      | <3.7:1      | <2.2:1      | <2.8:1      |
| Peak Gain (max in the band) | 5.8dBi                 | 3.7dBi             | 2.0dBi      | 1.4dBi      | 5.2dBi      | 6.1dBi      |
| Average Gain (typical)      | -0.50dBi               | -1.75dBi           | -2.90dBi    | -3.05dBi    | -1.95dBi    | -2.20dBi    |
| Efficiency (typical)        | 82%                    | 70%                | 52%         | 60%         | 65%         | 60%         |
| Polarization                | Linear                 |                    |             |             |             |             |
| Radiation                   | Omni-Directional       |                    |             |             |             |             |
| Max Power                   | 15W                    |                    |             |             |             |             |
| Wavelength                  | ¼-wave                 |                    |             |             |             |             |
| Impedance                   | 50-ohms                |                    |             |             |             |             |
| Connection                  | SMA Plug (Male)        |                    |             |             |             |             |
| Weight                      | 8g (0.3oz.)            |                    |             |             |             |             |
| Operating Temperature Range | -40°C to +70°C         |                    |             |             |             |             |

Measurements taken on a 100 x 100mm (4 x 4in) ground plane, mounted on the edge, straight


## Dimensions

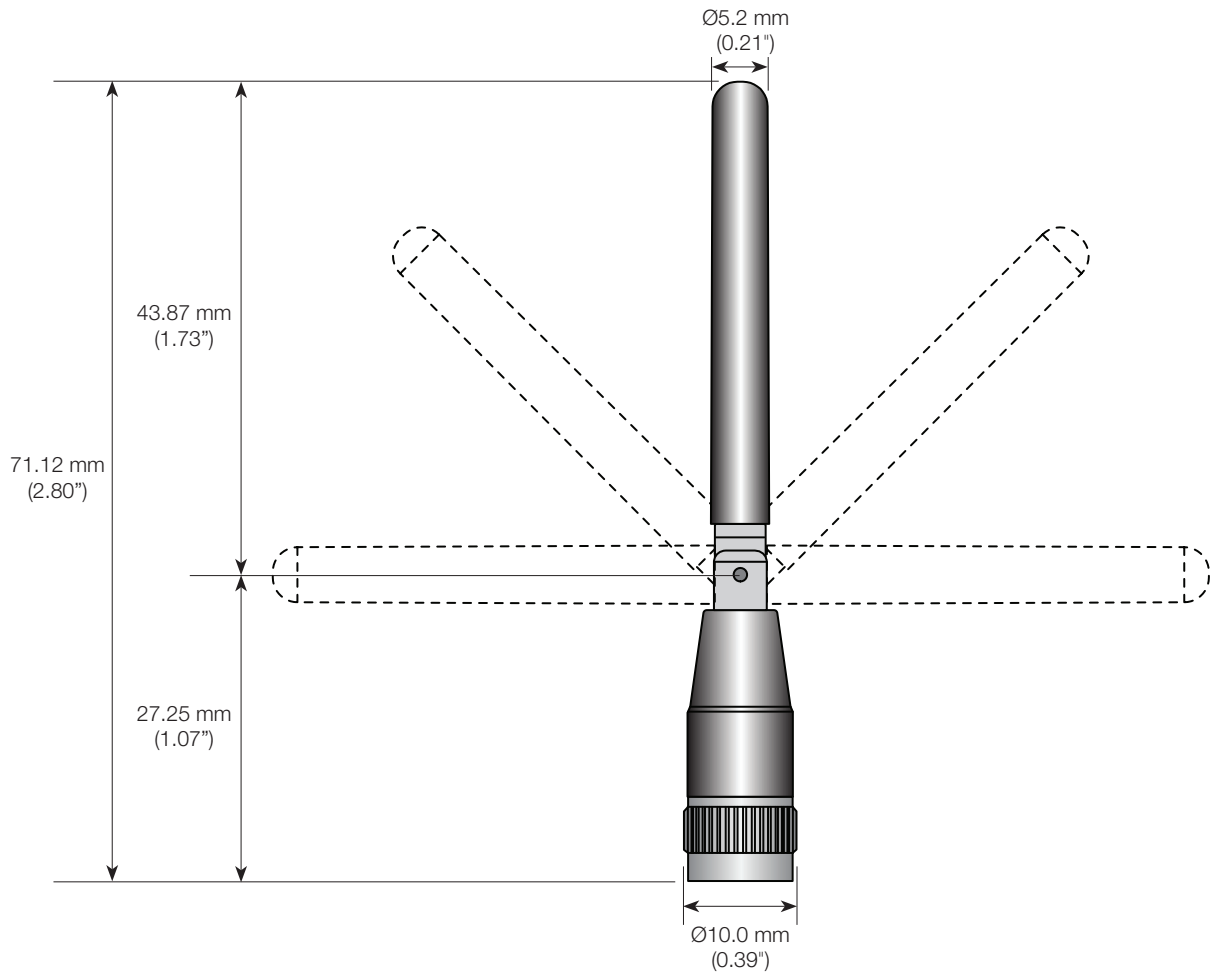


## Edge of the Ground Plane, Straight




### VSWR

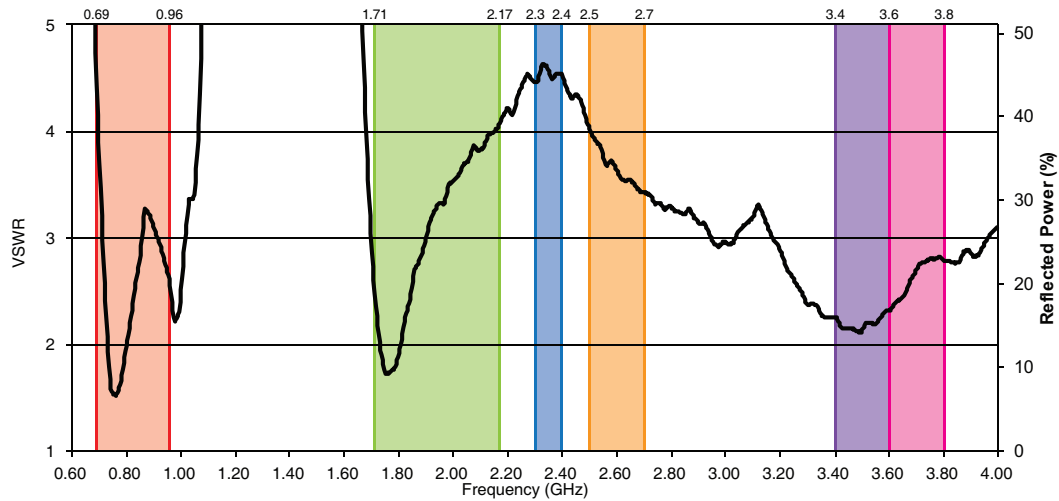


### Return Loss

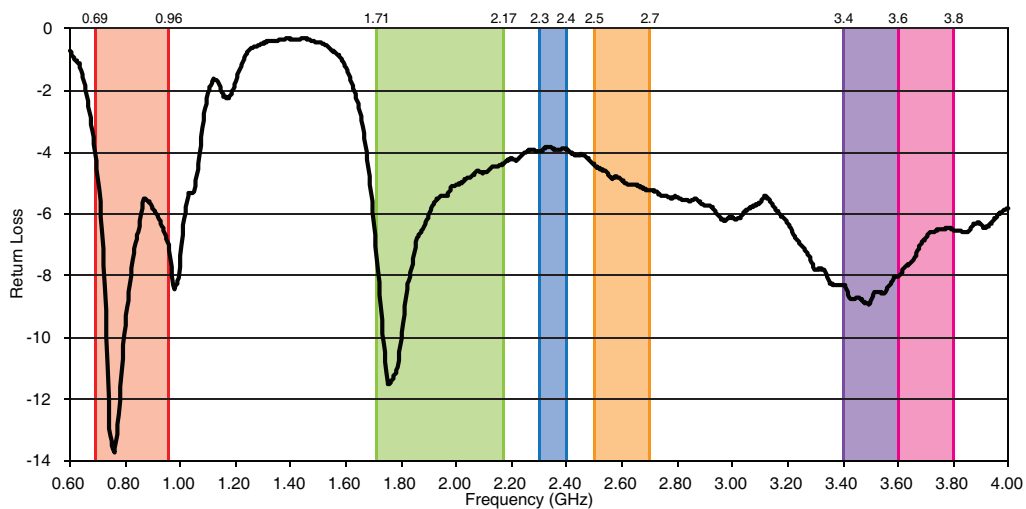


## Peak Gain

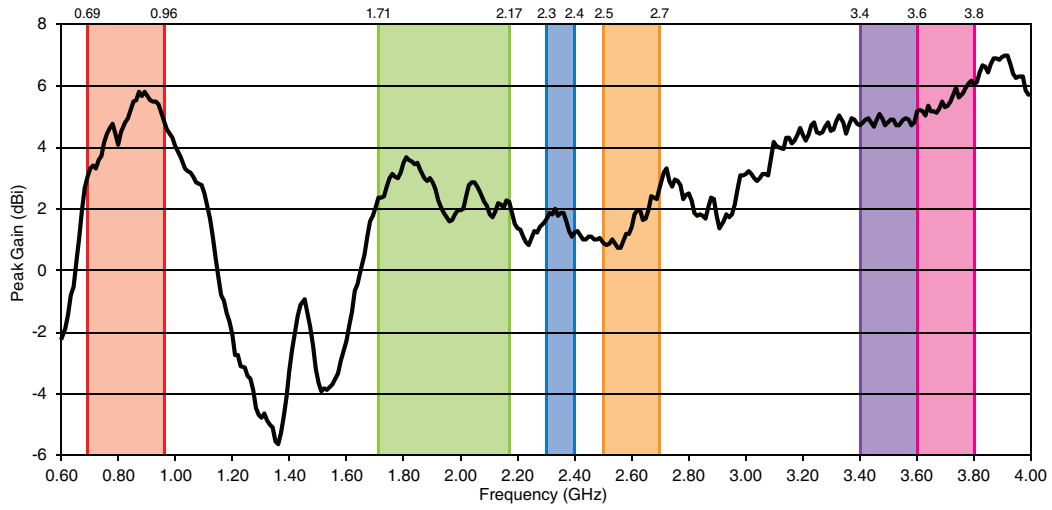


## Average Gain

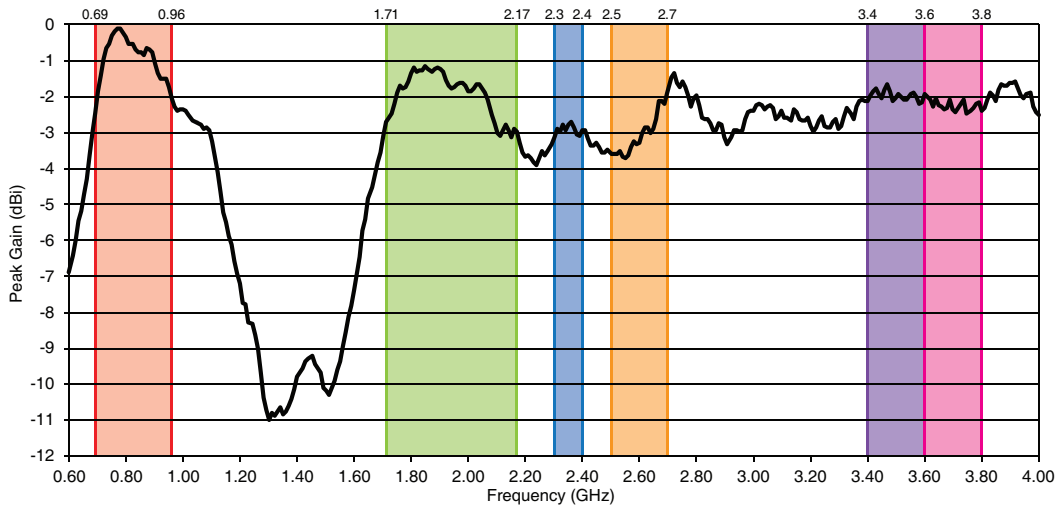


## Radiation Efficiency

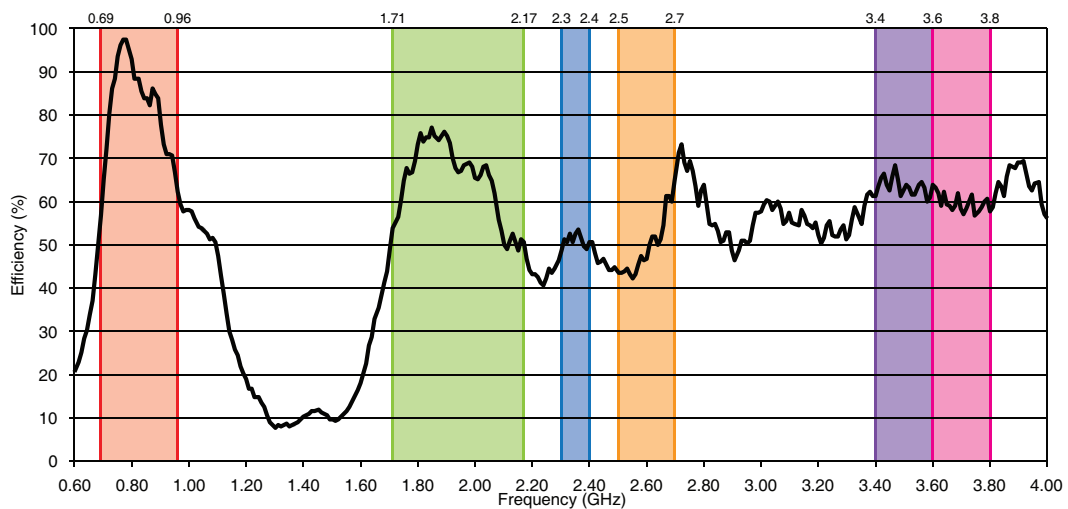


## Gain Plots - Edge of Plane, Straight

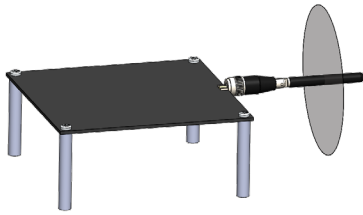

XZ-Plane Gain

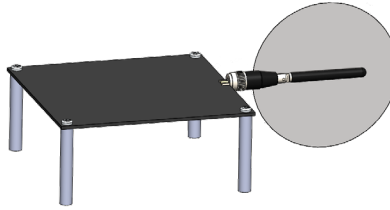


YZ-Plane Gain

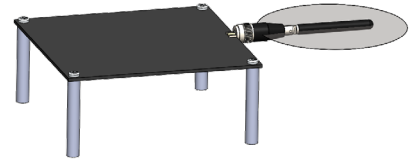


XY-Plane Gain


### 700 - 960MHz

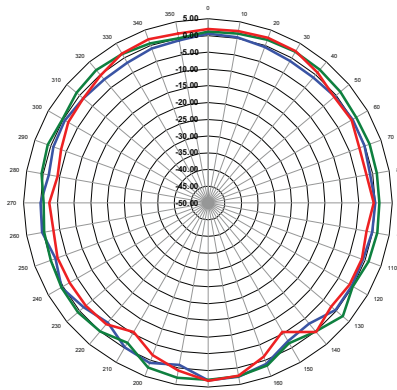

XZ-Plane Gain

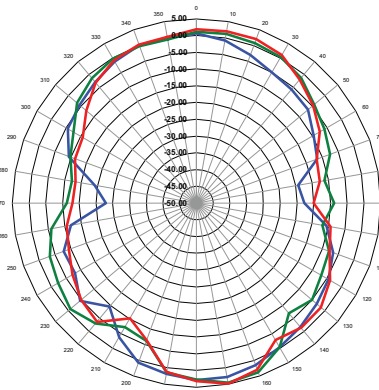


YZ-Plane Gain

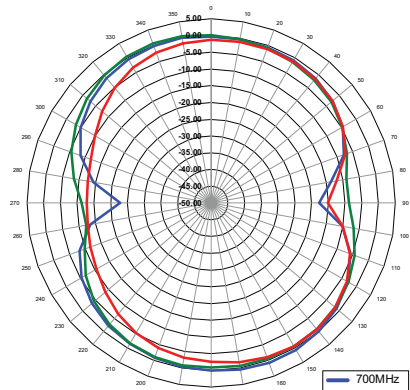


XY-Plane Gain




### 1710 - 2170MHz

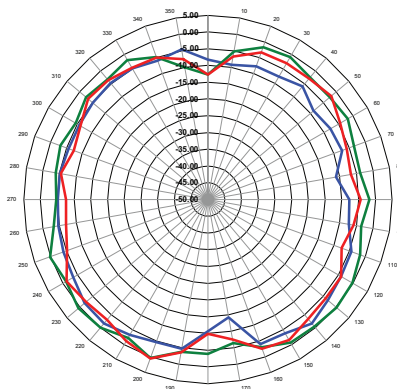

XZ-Plane Gain

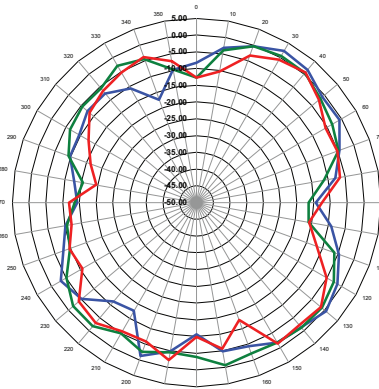


YZ-Plane Gain

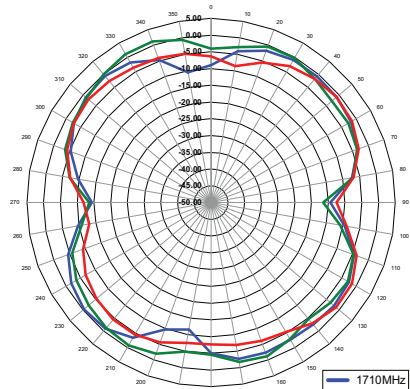


XY-Plane Gain




## Gain Plots - Edge of Plane, Straight

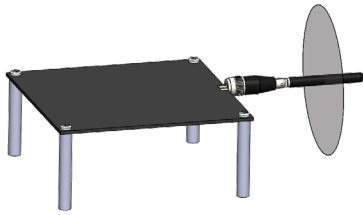

XZ-Plane Gain

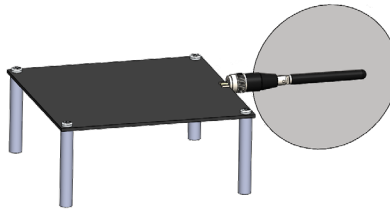


YZ-Plane Gain

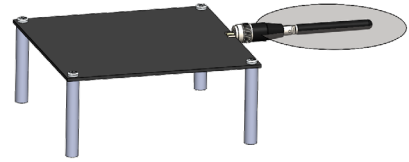


XY-Plane Gain


### 2300 - 2400MHz

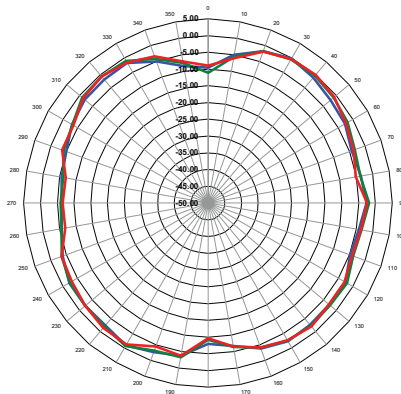

XZ-Plane Gain

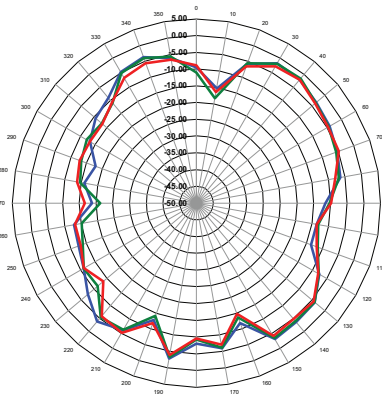


YZ-Plane Gain

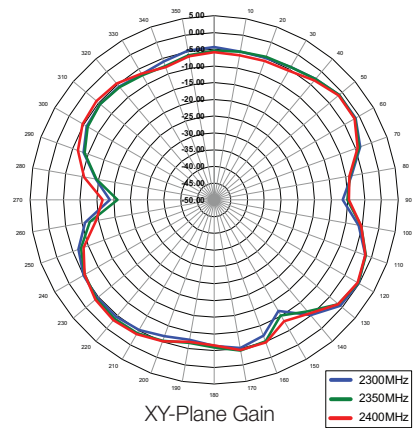


XY-Plane Gain




### 2500 - 2700MHz

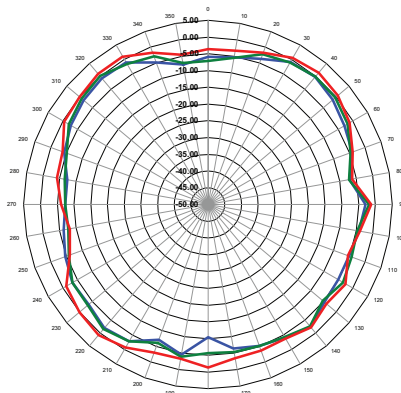

XZ-Plane Gain

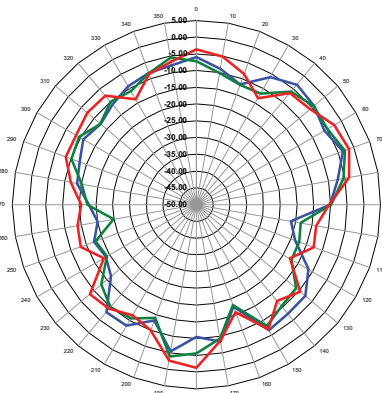


YZ-Plane Gain

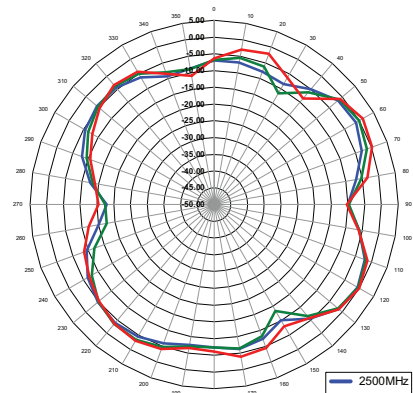


XY-Plane Gain




## Gain Plots - Edge of Plane, Straight

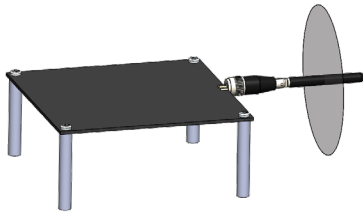

XZ-Plane Gain

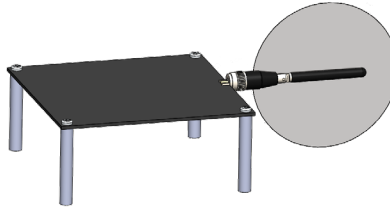


YZ-Plane Gain

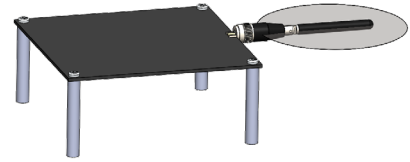


XY-Plane Gain


### 3400 - 3600MHz

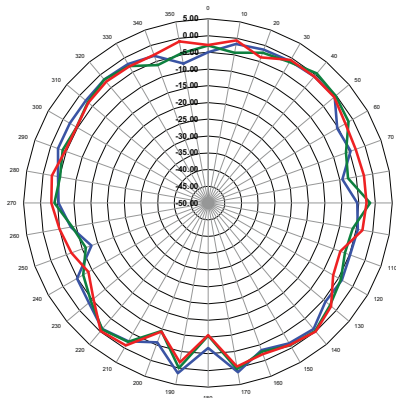

XZ-Plane Gain

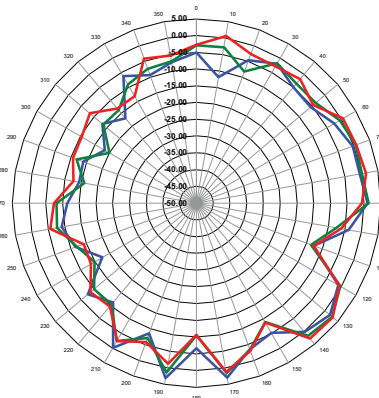


YZ-Plane Gain

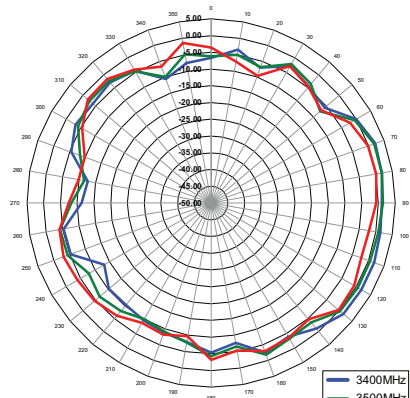


XY-Plane Gain




### 3600 - 3800MHz

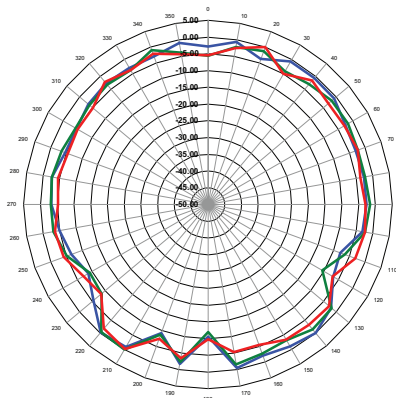

XZ-Plane Gain

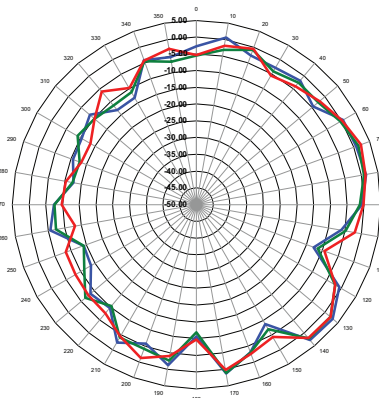


YZ-Plane Gain

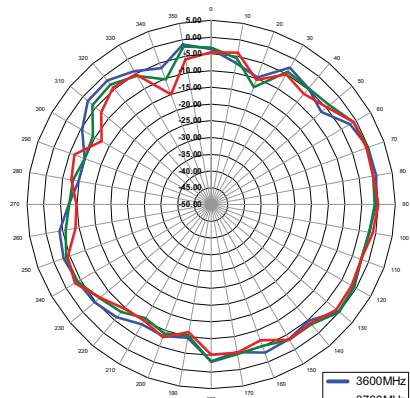


XY-Plane Gain




## Edge of the Ground Plane, Bent 90°

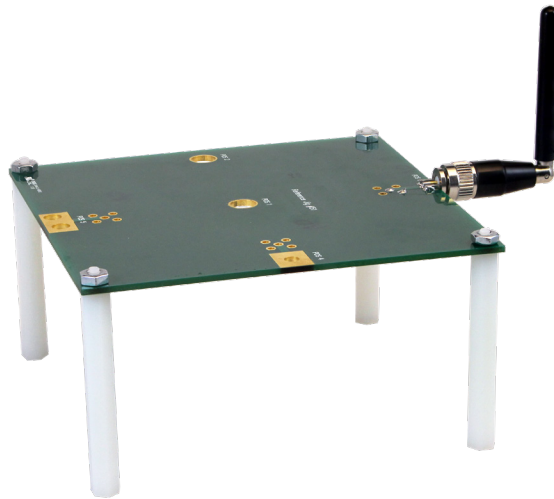

### VSWR

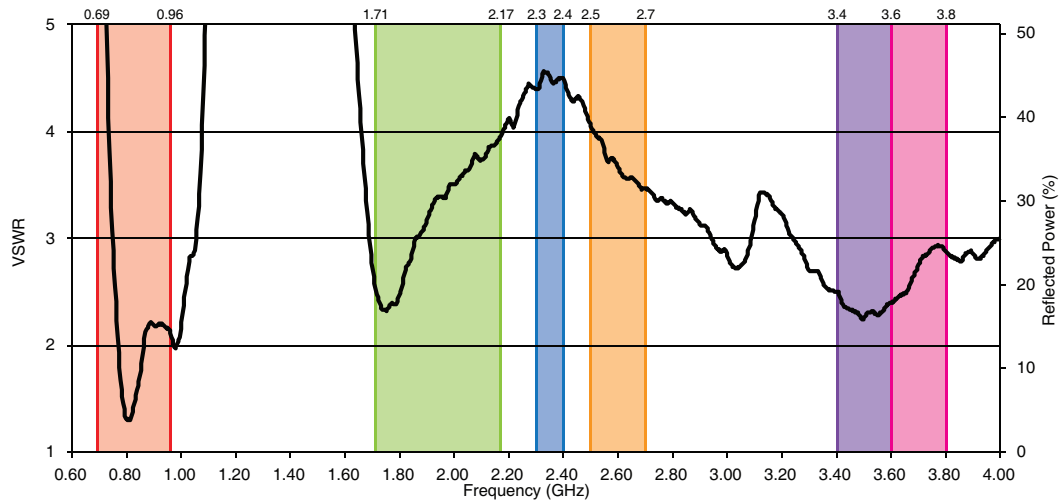


### Return Loss

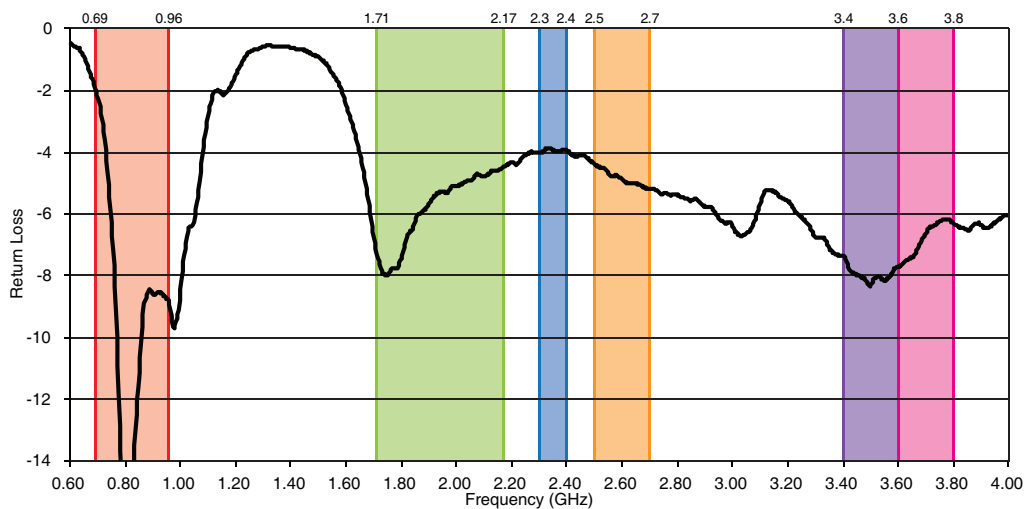





## Peak Gain

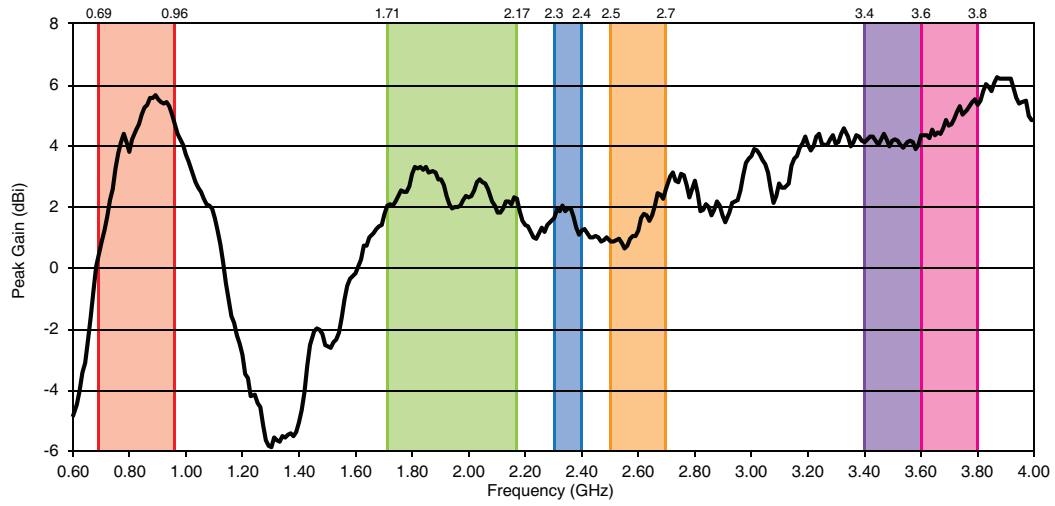


## Average Gain

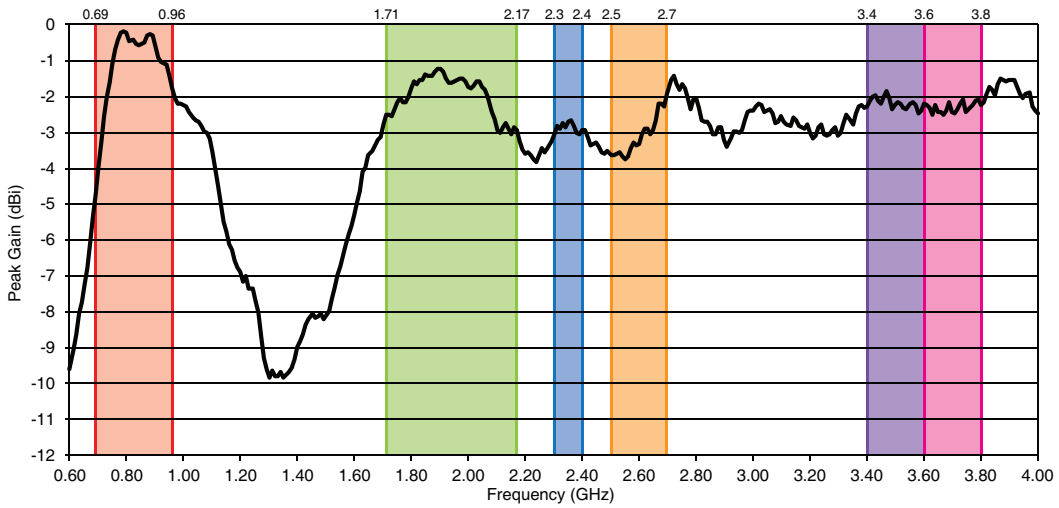


## Radiation Efficiency

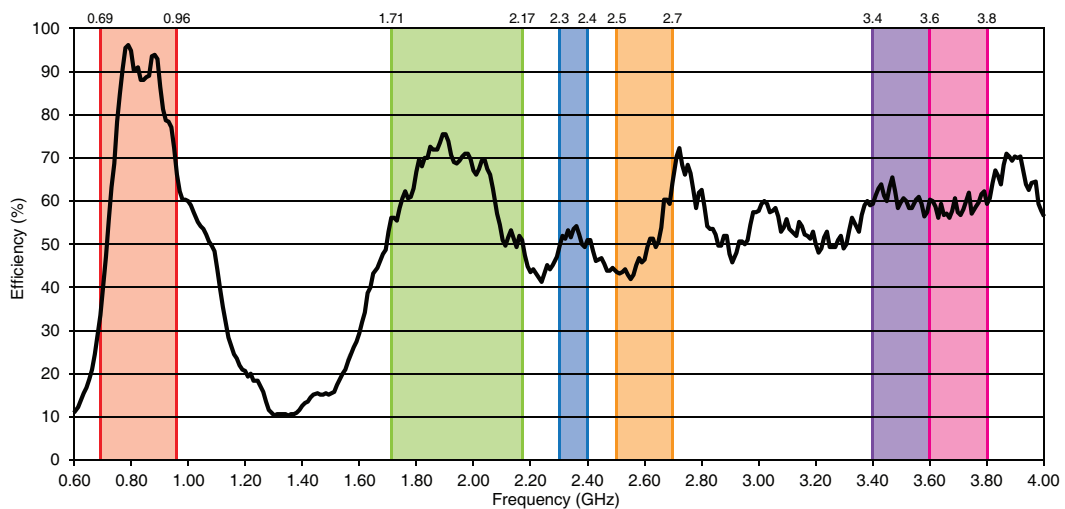


## Gain Plots - Edge of Plane, Bent 90°



XZ-Plane Gain

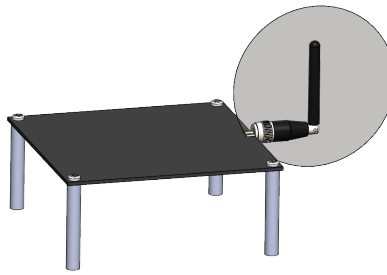


YZ-Plane Gain

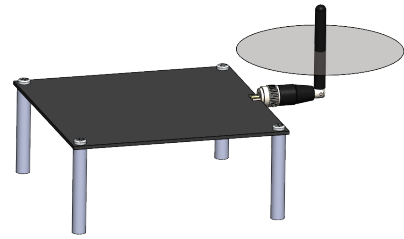


XY-Plane Gain


### 700 - 960MHz

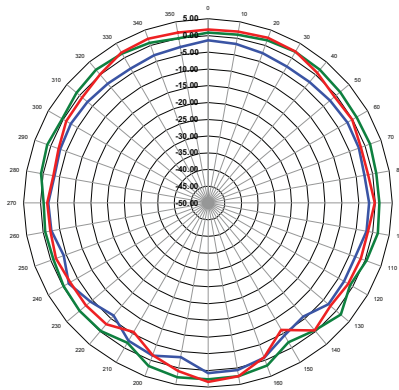

XZ-Plane Gain

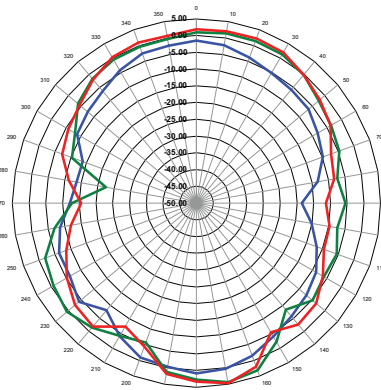


YZ-Plane Gain

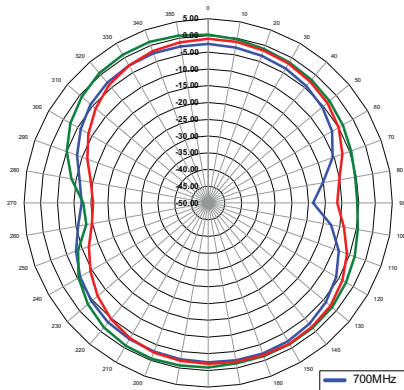


XY-Plane Gain




### 1710 - 2170MHz

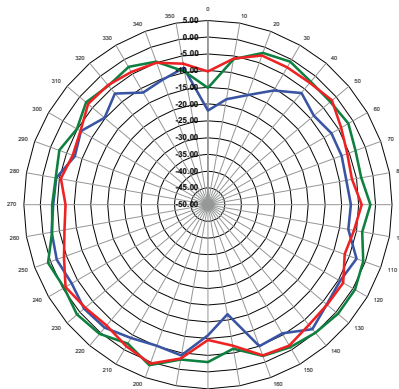

XZ-Plane Gain

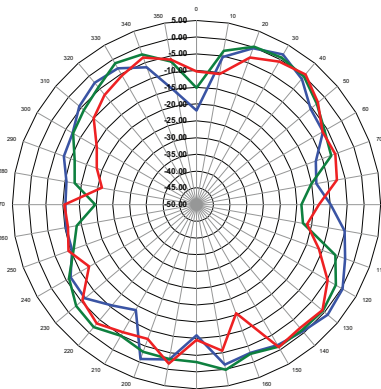


YZ-Plane Gain

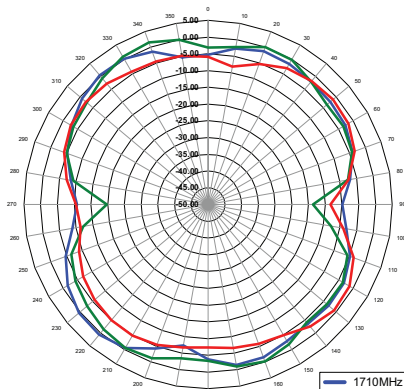


XY-Plane Gain




## Gain Plots - Edge of Plane, Bent 90°



XZ-Plane Gain

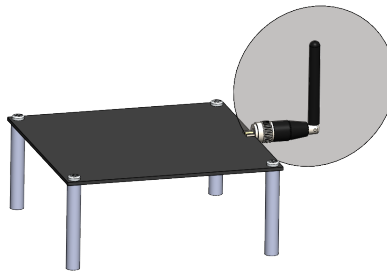


YZ-Plane Gain

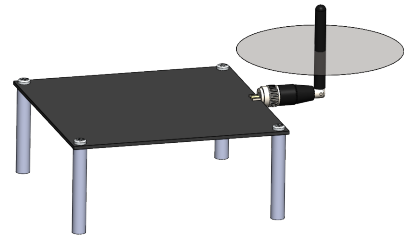


XY-Plane Gain


### 2300 - 2400MHz

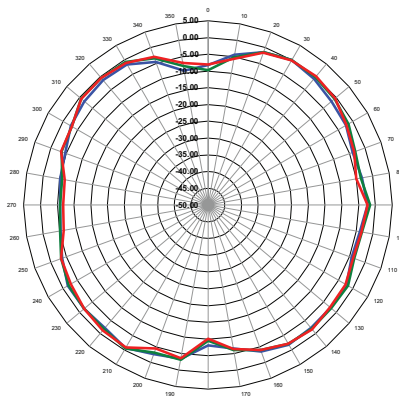

XZ-Plane Gain

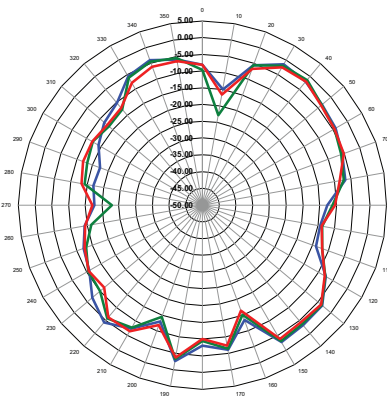


YZ-Plane Gain

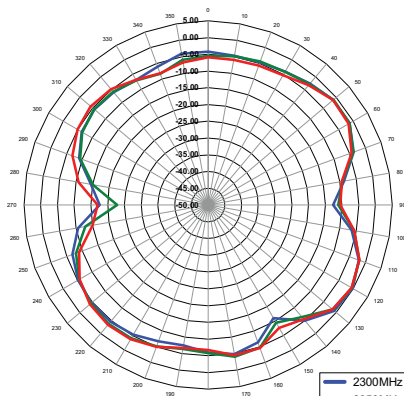


XY-Plane Gain




### 2500 - 2700MHz

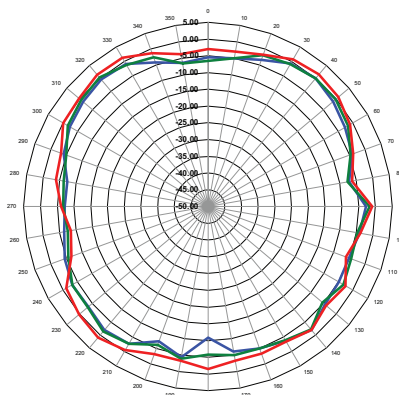

XZ-Plane Gain

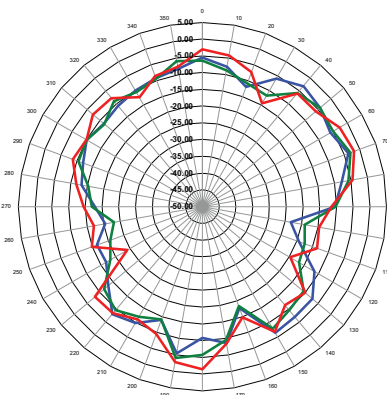


YZ-Plane Gain

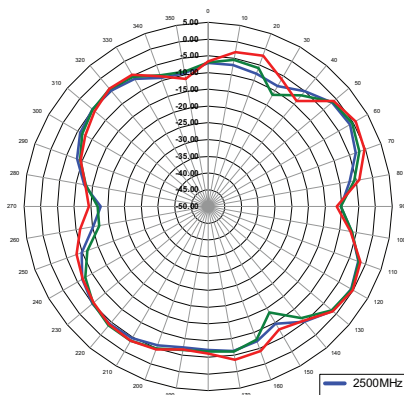


XY-Plane Gain




## Gain Plots - Edge of Plane, Bent 90°



XZ-Plane Gain

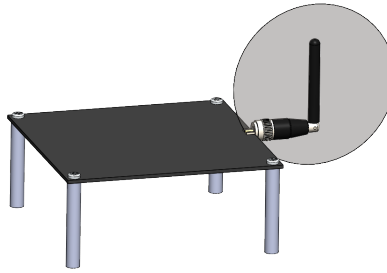


YZ-Plane Gain

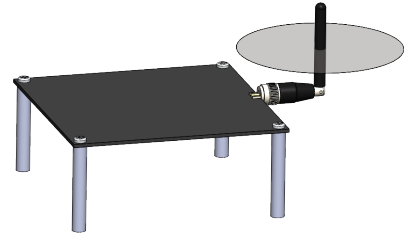


XY-Plane Gain


### 3400 - 3600MHz

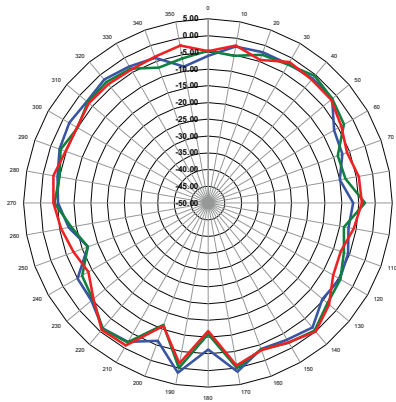

XZ-Plane Gain

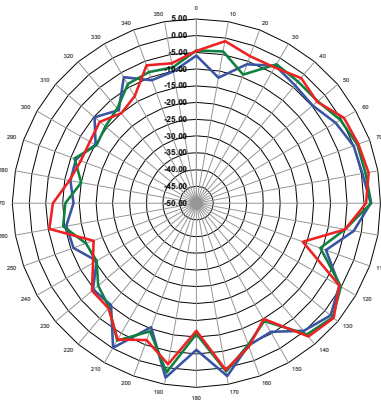


YZ-Plane Gain

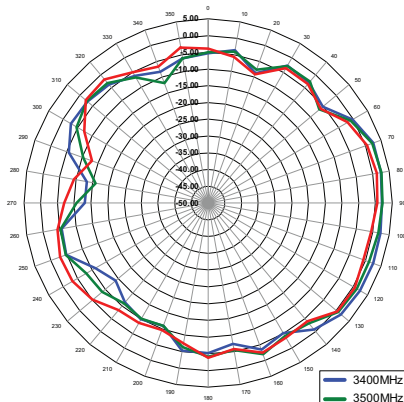


XY-Plane Gain




### 3600 - 3800MHz

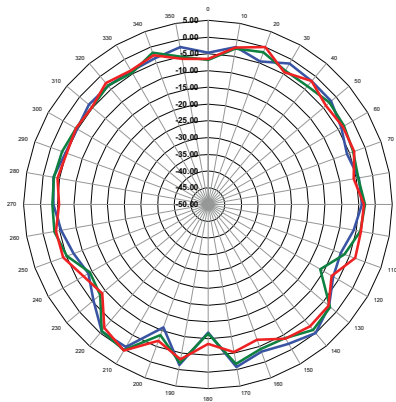

XZ-Plane Gain

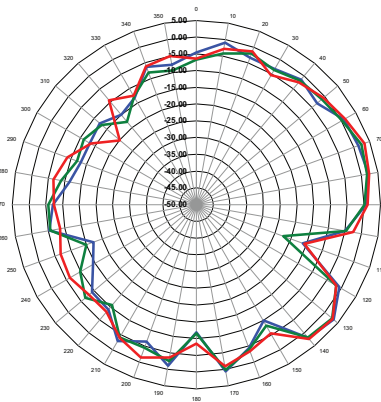


YZ-Plane Gain

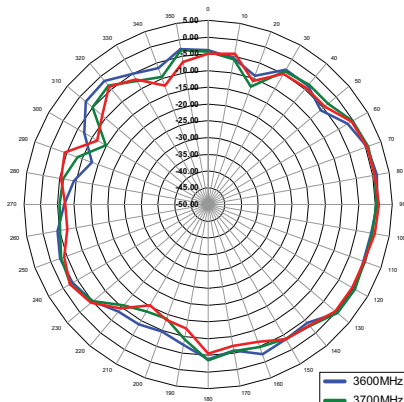


XY-Plane Gain




## Center of the Ground Plane, Straight

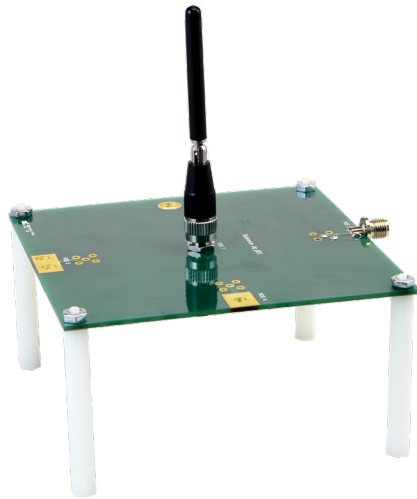


### VSWR

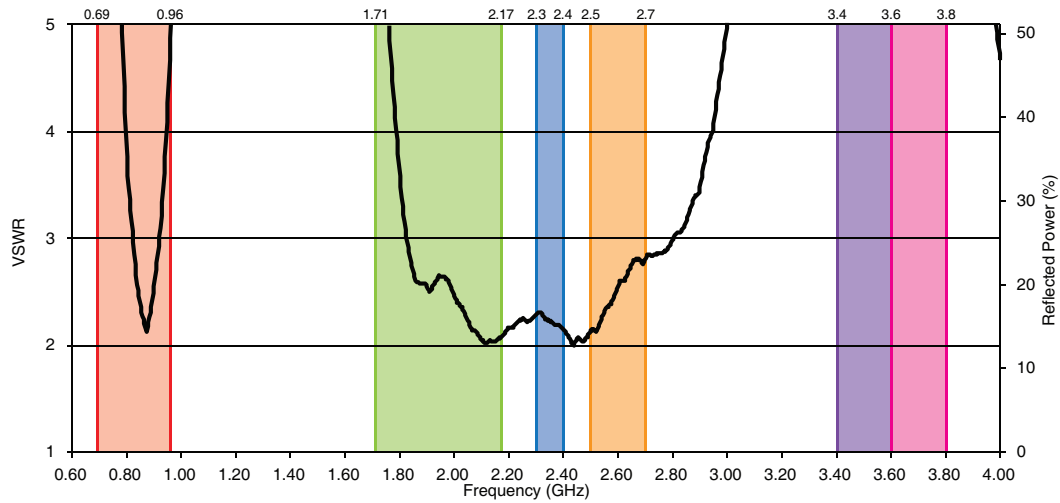


### Return Loss

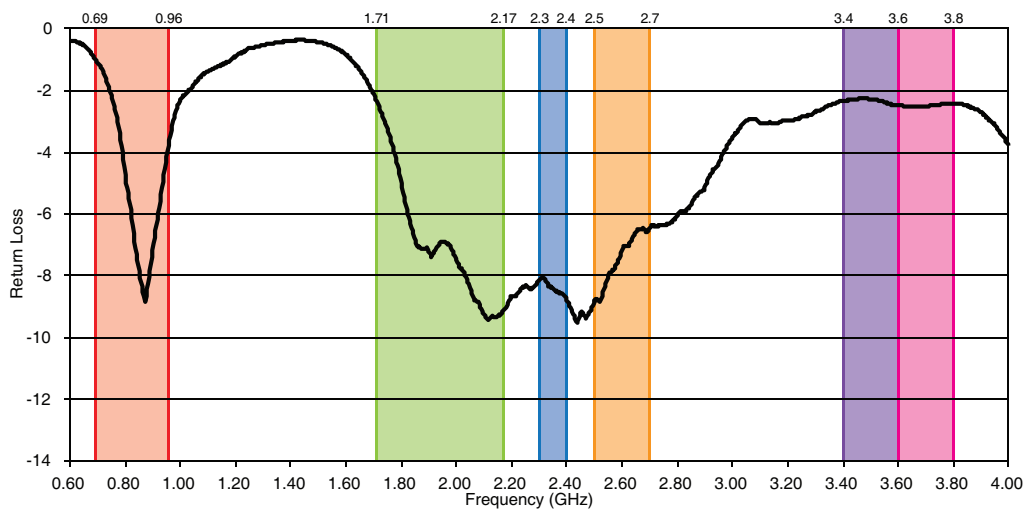


### Peak Gain

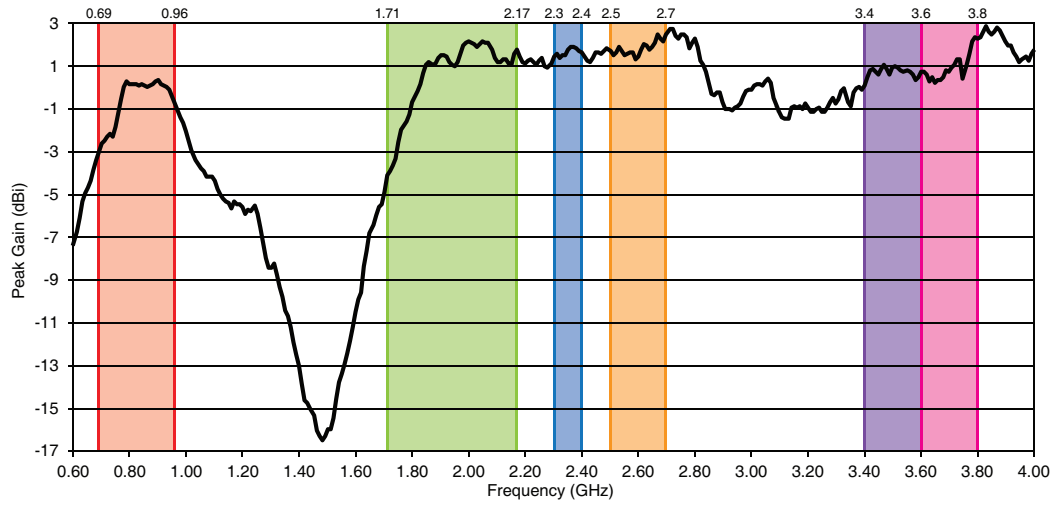

### Average Gain

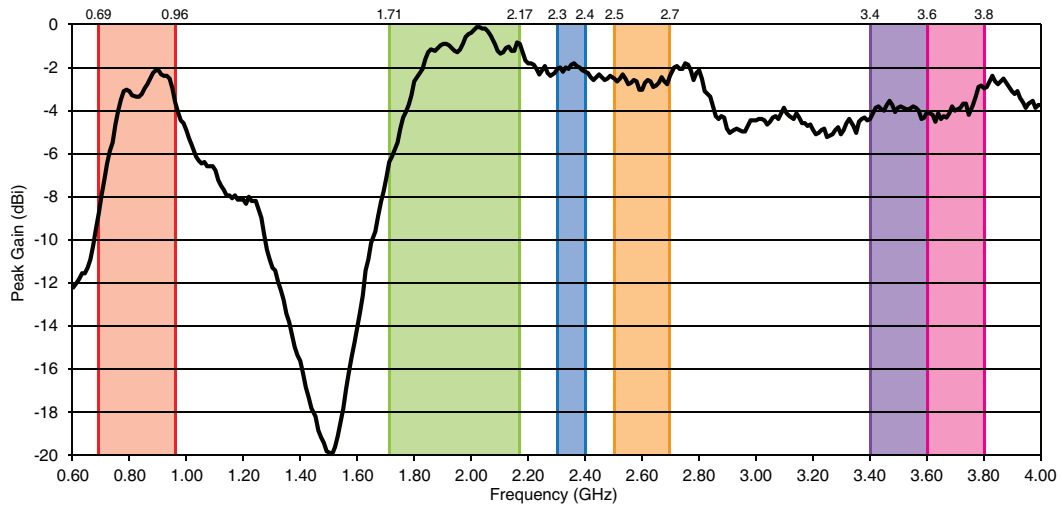

### Radiation Efficiency

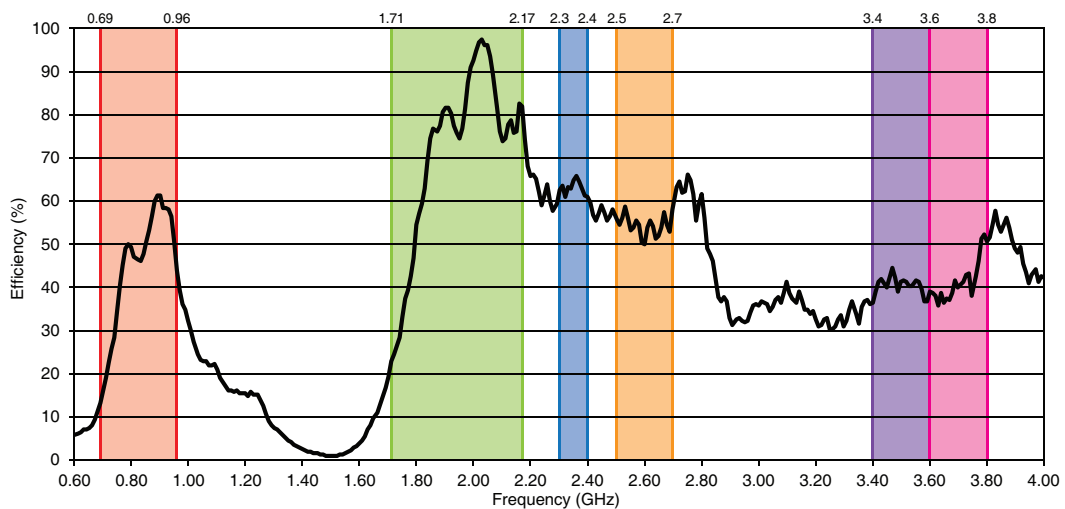


## Gain Plots - Center of Plane, Straight



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 700 - 960MHz

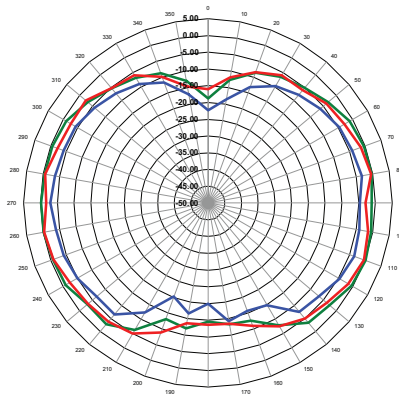

XZ-Plane Gain

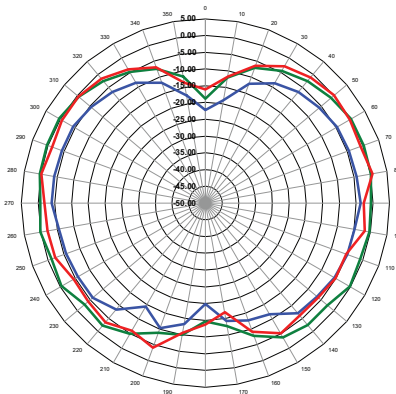


YZ-Plane Gain

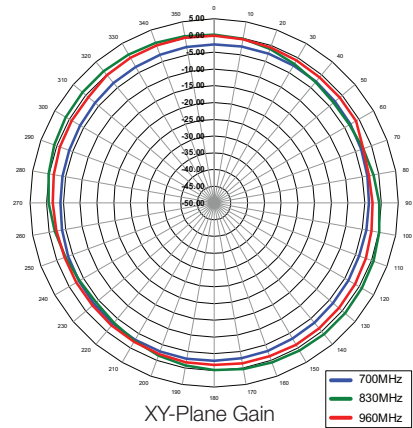


XY-Plane Gain




### 1710 - 2170MHz

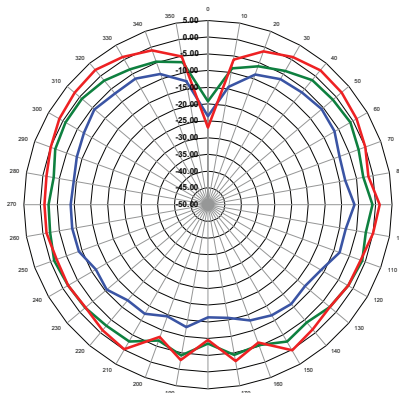

XZ-Plane Gain

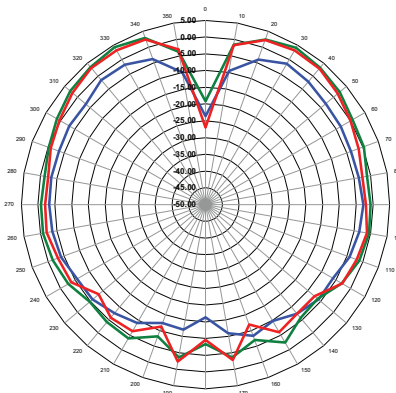

YZ-Plane Gain

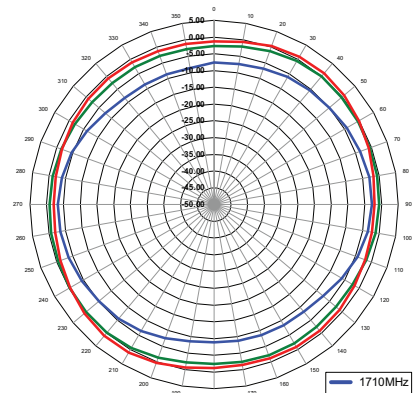

XY-Plane Gain






## Gain Plots - Center of Plane, Straight



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 2300 - 2400MHz

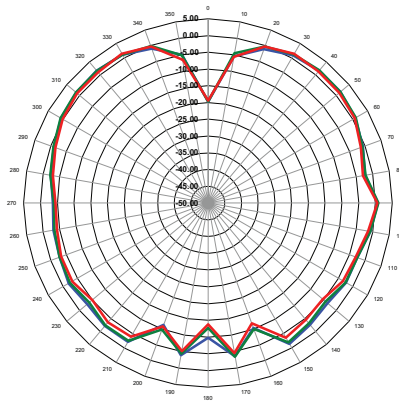

XZ-Plane Gain

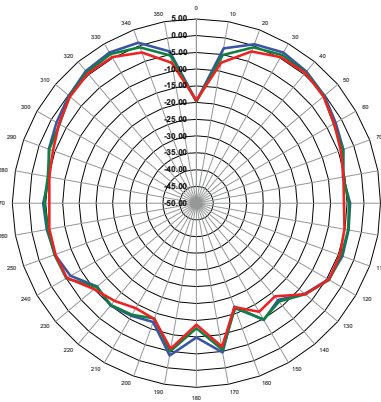


YZ-Plane Gain

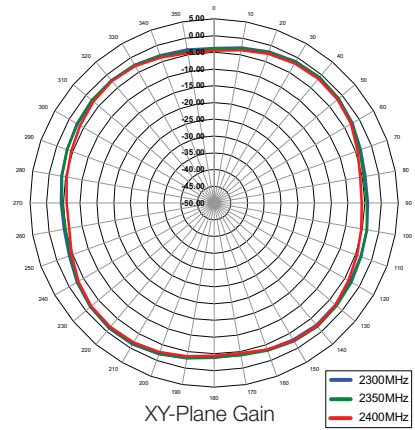


XY-Plane Gain




### 2500 - 2700MHz

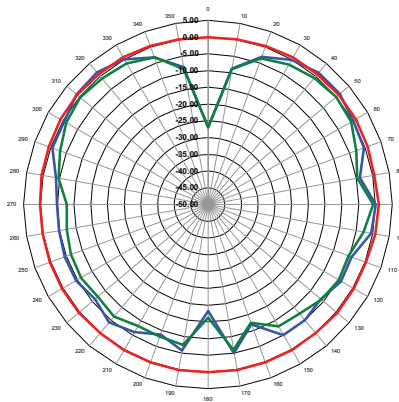

XZ-Plane Gain

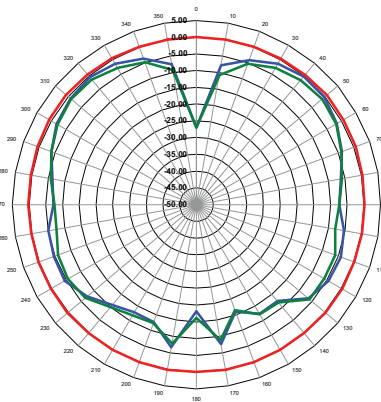

YZ-Plane Gain

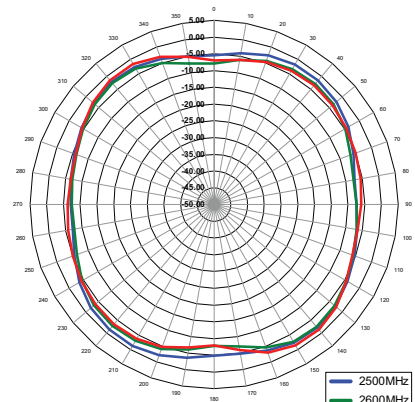

XY-Plane Gain







## Gain Plots - Center of Plane, Straight



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 3400 - 3600MHz

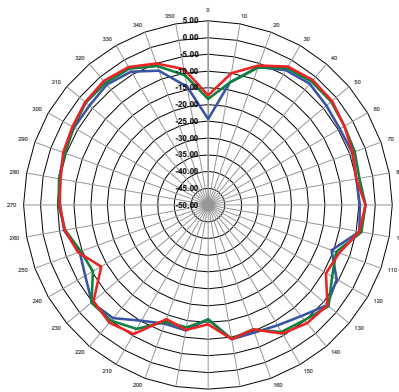

XZ-Plane Gain

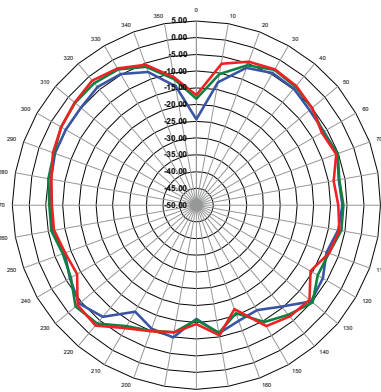


YZ-Plane Gain

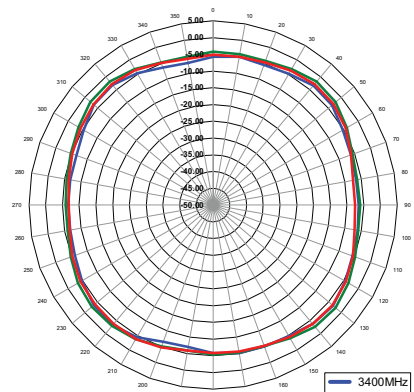


XY-Plane Gain




### 3600 - 3800MHz

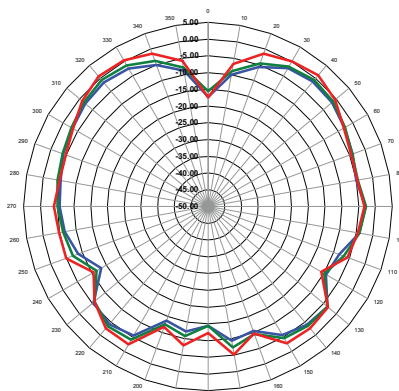

XZ-Plane Gain

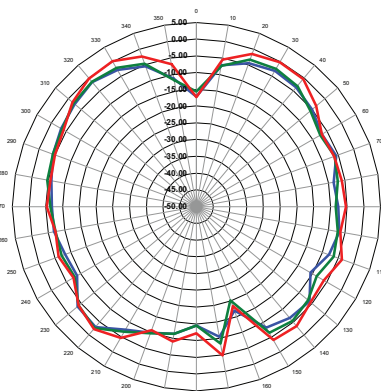

YZ-Plane Gain

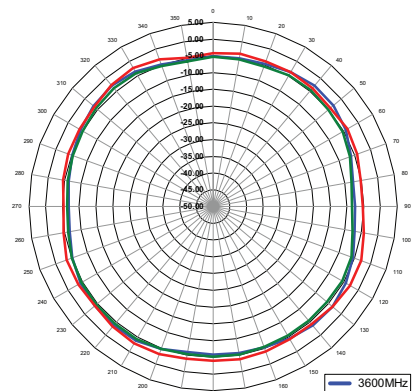


XY-Plane Gain



## Matching Network


A given design may not be able to incorporate the same size ground plane as was used to design and test the antenna. The antenna's performance can vary widely with the ground plane size, which will affect the product's range and other characteristics. It is possible to adjust the performance using a matching network. This can enable the integrator to be able to optimize performance in a specific band or to level performance across all bands.

The most common matching network is a PI circuit between the antenna and the radio. This is two capacitors to ground on either side of a series inductor. The values can be selected to electrically tune the antenna. It does take test equipment such as a network analyzer to get this right.

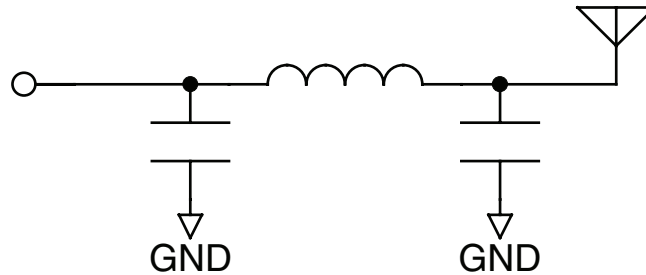

The values of the matching components are determined experimentally on the product's board. There are many variables that play into the antenna's final performance, so it is very difficult to predict what it will do on any specific design. It is best to design in the matching network, see what the antenna does on the prototype and then dial the performance in with the network components. Not all of the components may be needed on a particular design, so they do not need to be populated in production. But it is a good idea to have the component pads on the board in case they are needed.

The components should be placed close to the antenna connection. The component pads should be placed on the 50-ohm line between the radio and the antenna.

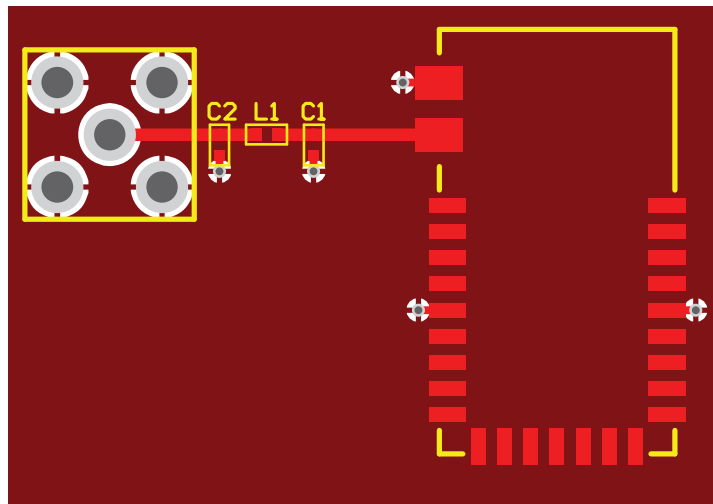

Linx Technologies offers a service to help customers tune our antennas to their circuit boards. Please contact Linx for more details.

Copyright © 2019 Linx Technologies

159 Ort Lane, Merlin, OR 97532  
Phone: +1 541 471 6256  
Fax: +1 541 471 6251  
www.linxtechnologies.com