

Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinFLASH 12/24VAC/DC BU**



|                  |                   |
|------------------|-------------------|
| <b>Part No.:</b> | <b>261.520.70</b> |
| <b>Series:</b>   | <b>EvoSIGNAL</b>  |



| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 130 mm                      |
| Diameter                     | 85 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Blue                        |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Type of fixing               | Adapter required            |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| Weight with packaging        | 188 g                       |
| Product weight               | 146 g                       |

| ELECTRICAL DATA             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 12V<br>24V         |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 12 VDC             |
| Rated operational current   | 150 mA             |
| Rated inrush current        | 1A                 |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | III                |

| OPTICAL DATA                 |                            |
|------------------------------|----------------------------|
| Light source                 | LED                        |
| Light colour                 | Blue                       |
| Optical signal image         | EVS<br>Flash<br>TwinFlash  |
| Flash frequency              | 1 Hz                       |
| Service life optical         | 50,000 h minimum           |
| Pulse- & pause Duration [ms] | 28ON, 164OFF, 28ON, 744OFF |

**APPROVAL DATA**

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinFLASH 12/24VAC/DC BU**


|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 469                   |

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL

**Midi TwinFLASH 12/24VAC/DC BU**

DRAWING

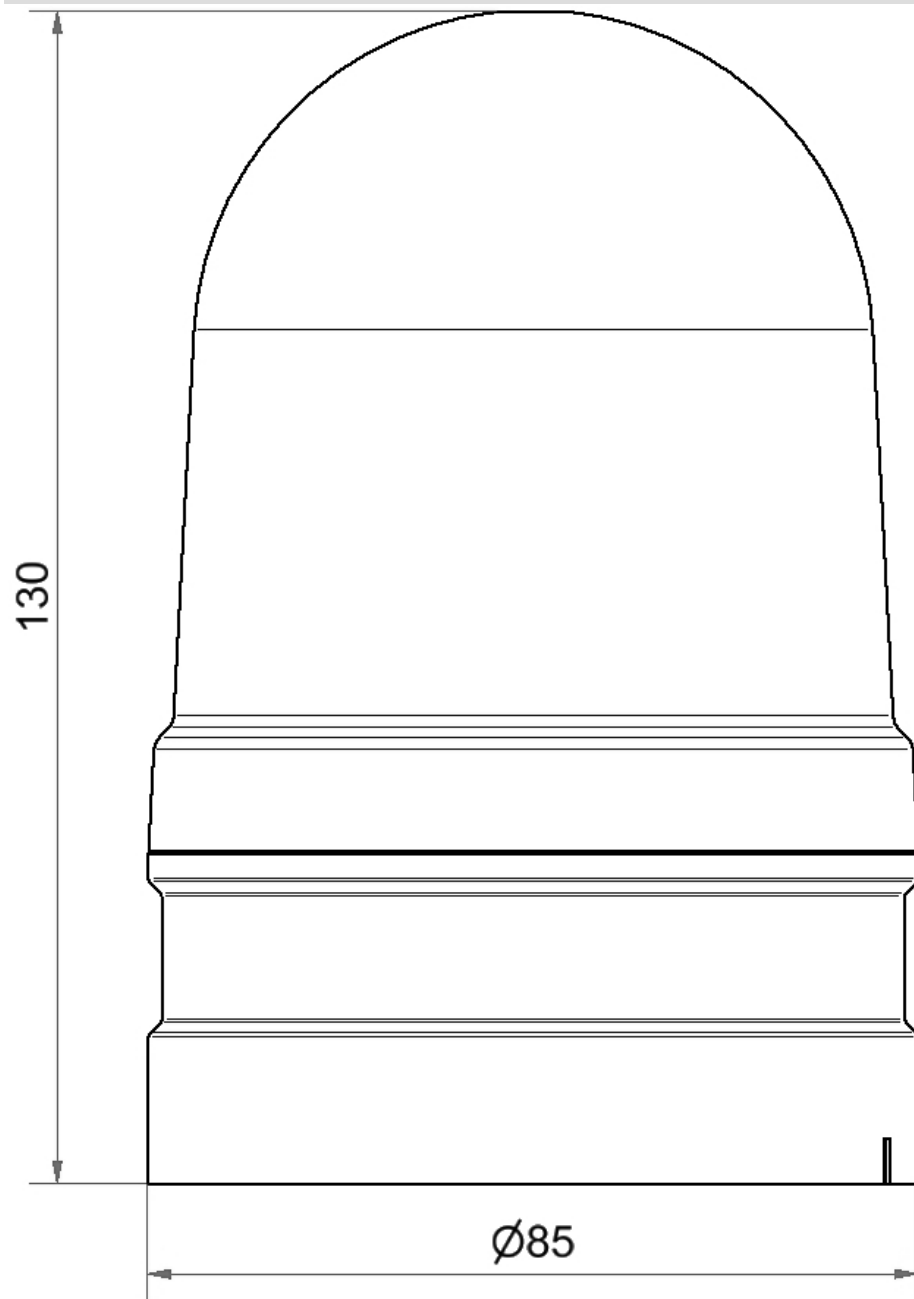

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.