

т	۵	п	m	0



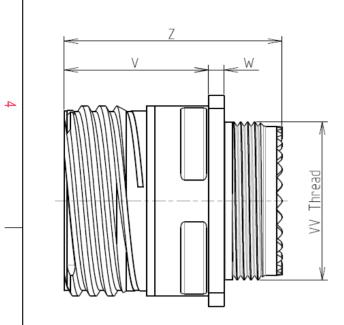



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 15

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 20.34 g ± 10%

8D 0

G

15

F

15

А

F

А


Dim	Nominal
Р	3.25±0.2
PP	4.39±0.2
R1	24.61
R2	23.01
S	31±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M22x1-6g


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 15-15



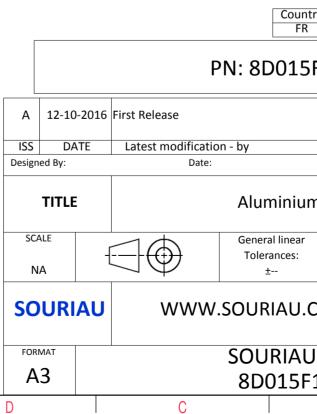

σ	1		A			
C					4	
AS EXAMPLE					3	
which doe	s not co ties or t hnical n Jurisc	oy a third par	ty trol List		2	
		CUSTOME	R DRAWING	MOD N°		
um Rece	Im Receptacle 8D series					
ar :		NPRDS / PROJECT 859				
J.COM	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRO				SHEET 1/2		
B			A		J	

	工	۵	г	m	D	C	
		Contact Layout					Panel Cutout
4	-×	$ \begin{array}{c} & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & $			ħ	SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	E 0)
	Contact position ID Loca (mm) A +.100 (12.54) B +.202 (5.13) C +.244 (6.20) D +.218 (5.54) E +.126 (3.20) F +.001 (.01) G 126 (3.20) H 218 (5.54) Shell Arrangement no. Num con	(Insert arrangement 15-15) tion Location Y-axis Y-axis Y-axis (mm) position ID X-axis Y-axis (mm) -225 (5.72) J -244 (6.20) +014 (0.36) +.140 (3.56) K -202 (5.13) +140 (3.56) 113 (2.87) M +000 (0.00) +140 (3.56) 209 (5.31) N +110 (2.79) +040 (1.02) 245 (6.22) P = 000 (0.00) -174 (1.95) 245 (6.22) P = 000 (0.00) -0.77 (1.96) 245 (6.22) P = 000 (0.00) -0.77 (1.96) 245 (6.27) - - - 213 (2.87) - - - 113 (2.87) - - - ber of Size Service Contact Supersedes	1		<u>۲</u>		
ယ	15 15	tacts contacts rating location 1 16 P MS20052-15 14 20 I All other MS20052-15					Dim ØA ØAA R1 ØT
	-					the Specifications iss	the Products whi
N							Country FR
					A 12-10-201 ISS DATE Designed By:	PN 16 First Release Latest modification - Date:	J: 8D015F
					SCALE		Aluminium General linear
					SOURIAL	www.s	Tolerances: ± OURIAU.CO
					FORMAT A3	S	SOURIAU 8D015F1
	Н	G	F	E	D	С	

