Midi free-standing Beacons / EvoSIGNAL Midi TwinFLASH 12/24VAC/DC GN



i

Part No.:	261.220.70			
Series:	EvoSIGNAL			
MECHAN	ICAL DATA			
Height		130 mm		
Diameter		85 mm		
Materials		PC PC/ABS		
Dome colour		Green		
Housing colour		Grey		
Protection category		IP66		
Connection		Push-in terminal		
cross-sectional area minimum		0,25mm² / 24AWG		
cross-sectional area maximum		1,50mm² / 16AWG		
Type of fixing		Adapter required		
Working temperature minimum		-30°C		
Working temperature maximum		+60°C		
Weight with packaging		286 g		
Product weight		186 g		
ELECTRIC	AL DATA			
	g voltage	12V		
		24V		
Operating voltage type		AC/DC		
Operating voltage frequency		50Hz		
Operating voltage tolerance		+/- 10%		
Rated operational voltage		12 VDC		
Rated operational current		150 mA		
Rated inrush current		1A		
Protection class		Protection class 2		
Pollution degree		3		
Overvoltage category		Ш		
OPTICAL	DATA			
Light source		LED		
Light colour		Green		
Optical signal image		EVS Flash TwinFlash		
Flash frequency		1 Hz		
Service life optical		50,000 h minimum		
	pause Duration [ms]	280N, 1640FF, 280N, 7440FF		

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ


Midi free-standing Beacons / EvoSIGNAL Midi TwinFLASH 12/24VAC/DC GN

Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	469

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Midi free-standing Beacons / EvoSIGNAL Midi TwinFLASH 12/24VAC/DC GN

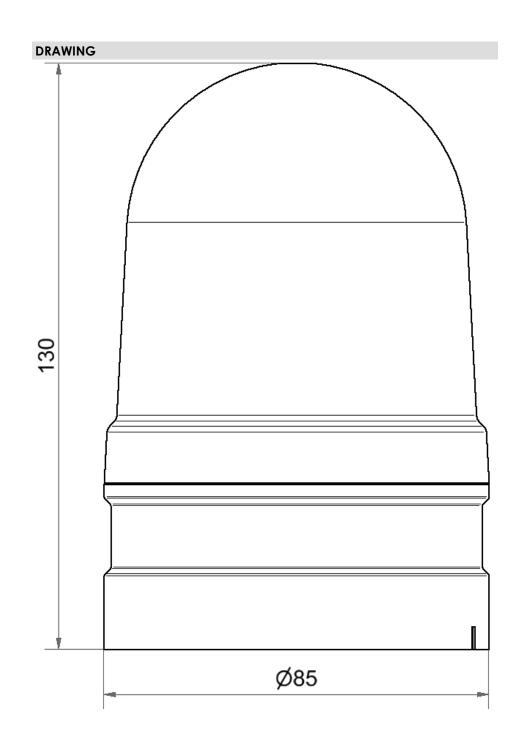

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.