

# ARCA 405021 No MP



Sample image

**Order symbol:** ARCA 405021 No MP

**Product nbr:** 8120025N

**Description:** Cabinet. PC


**Remarks:** Grey cover. 2-point locking. hinges on the short side

**EAN:** 6418074089434

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

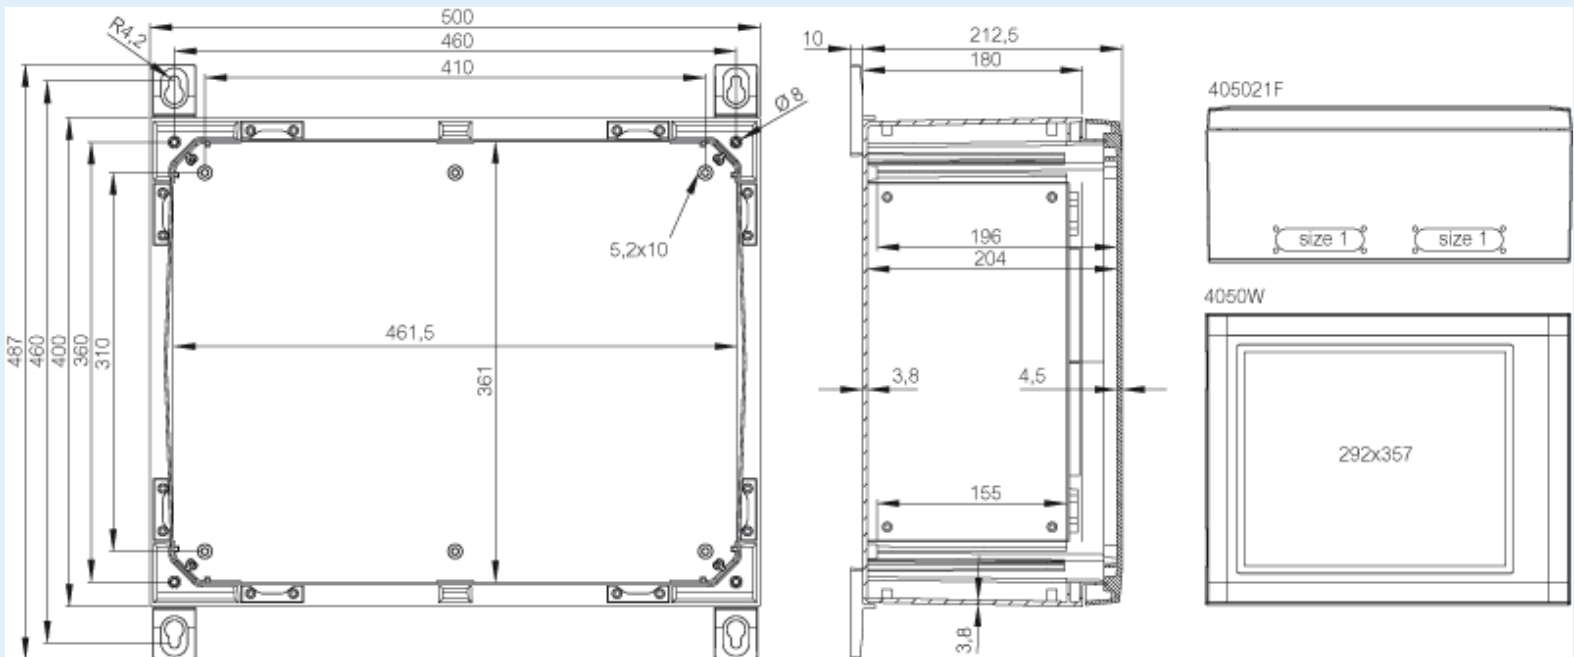

Dimensions:	Height	Width	Depth
mm:	400	500	210
inch:	15.75	19.69	8.58

**Materials:**

**Accessories:**

SBK ARCA 50	Support bar kit (435 x 40 x 30)
MPX ARCA 5040	Mounting plate (450x350 mm) (450 x 350 x 5)
MPMP ARCA 5040	Mounting plate multiperforated (450x350x2 mm - ø3.6 mm)

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

#### Temperatures:

Temperature °C (short term)::	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

	(450 x 350 x 2)
DSP ARCA HRS	Door stopper ARCA. horizontal. right. small
DRS ARCA 405021	DIN rail frame set (485 x 385 x 35)
DSP ARCA HLS	Door stopper ARCA. horizontal. left. small
SBK ARCA 40	Support bar kit (340 x 40 x 30)
MPP ARCA 4050	Mounting plate perforated (450x350x2 mm - 26x11 mm) (350 x 450 x 2)
MPS ARCA 5040	Mounting plate (450x350x2 mm) (450 x 350 x 2)
PMK ARCA 50	PoleMounting kit. for pole ø100-300mm (485 x 385 x 35)
IDS ARCA 4050	Inner door set (385 x 285 x 35)
RCS ARCA 4050	Rain canopy set for size 4050 (20 x 500 x 30)

#### Rating:

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

#### Certificates:

Certificate FI 40467