


# Data sheet | Item number: 765-1702/200-000

8-channel digital input/output; IO Link Class A Hub; DC 24 V / 2.0 A; 8xM8 connection; HubLine



[www.wago.com/765-1702/200-000](http://www.wago.com/765-1702/200-000)

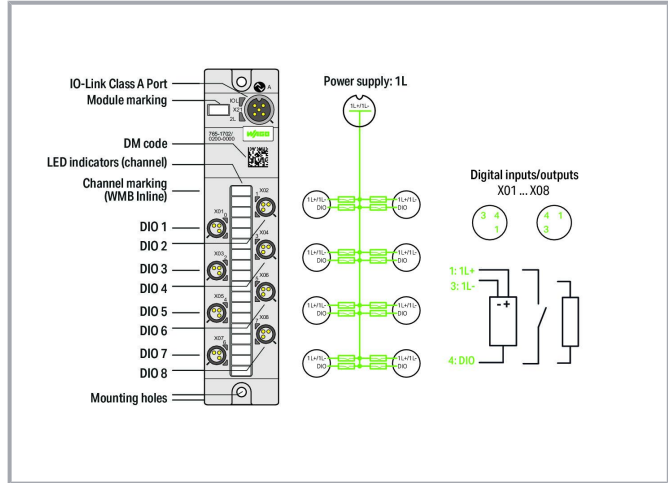

## Data

### Technical data

### IO-Link

Communication	IO-Link slave (class A)
Connection technology: communication/fieldbus	1 x A-coded M12; 5-pole

### Device functions

Parameter	Input filter Output current Temperature
Diagnostics	Undervoltage; overcurrent; overload; overtemperature

### Digital inputs/outputs

Number of digital inputs	8
--------------------------	---

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Number of digital outputs	8
Connection technology: inputs/outputs	8 x M8; 3-pole
Signal type (voltage)	24 VDC
Input characteristic	high-side switching
Input filter	0.2 ... 20 ms
Input characteristic	Type 3, per IEC 61131-2
Output current (per channel)	2 A

## Supply

Connection technology: supply	1 x A-coded M12; 5-pole; via IO-Link port (1L)
Supply voltage	24 VDC (18 ... 31.2 V); 1L
Current consumption (max.)	4000 mA
Current consumption (note)	1L: 0.2 A + load current
Reverse voltage protection	Yes

## Physical data

Width	35 mm / 1.378 inches
Height	30 mm / 1.181 inches
Depth	158.5 mm / 6.24 inches

## Mechanical Data

Weight	120 g
Conformity marking	CE

## Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP67
Protection class	III per EN 61140, IEC 61140, VDE 0140-1
Operating altitude	0 ... 2000 m / 0 ... 6562 ft
Pollution degree	3 (EN 60664-1)
Overvoltage category	II (EN 60664-1)
Vibration resistance	5g per IEC 60068-2-6
Shock resistance	Short-term: 50g/11 ms/half-sine per IEC 60068-2-27; Long-term: 30g/6 ms/half-sine per IEC 60068-2-29
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Commercial data


ETIM 8.0	EC001599
ETIM 7.0	EC001599
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143950039
Customs tariff number	85371098990

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



## Approvals / Certificates

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

## Required accessories

### Marking accessories

Marking strip		
	<b>Item no.: 2009-110</b> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>
Marker		
	<b>Item no.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>

### Tool

Assembly tool		
	<b>Item no.: 206-701</b> Torque wrench M8 and M12; Assembly kit	<a href="http://www.wago.com/206-701">www.wago.com/206-701</a>

### Cover











Cover		
-------	--	--

Subject to changes. Please also observe the further product documentation!













	<b>Item no.: 756-8103</b> M12 protective cap; for unused plugs	<a href="http://www.wago.com/756-8103">www.wago.com/756-8103</a>
	<b>Item no.: 756-8101</b> M8 protective cap; for unused sockets	<a href="http://www.wago.com/756-8101">www.wago.com/756-8101</a>

## Optional accessories

### Cables and pluggable connectors

Sensor/actuator cable		
	<b>Item no.: 756-5402/050-010</b> Sensor/Actuator cable; M12A socket; straight; M12A plug; angled; 5-pole; Length: 1 m	<a href="http://www.wago.com/756-5402/050-010">www.wago.com/756-5402/050-010</a>
	<b>Item no.: 756-5501/030-020</b> Sensor/Actuator cable; M12A socket; straight; M8 plug; straight; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5501/030-020">www.wago.com/756-5501/030-020</a>
	<b>Item no.: 756-5502/030-010</b> Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole; Length: 1 m	<a href="http://www.wago.com/756-5502/030-010">www.wago.com/756-5502/030-010</a>
	<b>Item no.: 756-5502/030-020</b> Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5502/030-020">www.wago.com/756-5502/030-020</a>
	<b>Item no.: 756-5503/030-010</b> Sensor/Actuator cable; M12A socket; angled; M8 plug; straight; 3-pole; Length: 1 m	<a href="http://www.wago.com/756-5503/030-010">www.wago.com/756-5503/030-010</a>
	<b>Item no.: 756-5503/030-020</b> Sensor/Actuator cable; M12A socket; angled; M8 plug; straight; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5503/030-020">www.wago.com/756-5503/030-020</a>
	<b>Item no.: 756-5301/050-015</b> Sensor/Actuator cable; M12A socket; straight; 5-pole; Length: 1.5 m	<a href="http://www.wago.com/756-5301/050-015">www.wago.com/756-5301/050-015</a>
	<b>Item no.: 756-5111/030-015</b> Sensor/Actuator cable; M8 plug; straight; 3-pole; Length: 1.5 m	<a href="http://www.wago.com/756-5111/030-015">www.wago.com/756-5111/030-015</a>
	<b>Item no.: 756-5111/030-050</b> Sensor/Actuator cable; M8 plug; straight; 3-pole; Length: 5 m	<a href="http://www.wago.com/756-5111/030-050">www.wago.com/756-5111/030-050</a>
	<b>Item no.: 756-5111/030-100</b> Sensor/Actuator cable; M8 plug; straight; 3-pole; Length: 10 m	<a href="http://www.wago.com/756-5111/030-100">www.wago.com/756-5111/030-100</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 756-5112/030-100</b> Sensor/Actuator cable; M8 plug; angled; 3-pole; Length: 10 m	<a href="http://www.wago.com/756-5112/030-100">www.wago.com/756-5112/030-100</a>
	<b>Item no.: 756-5112/030-015</b> Sensor/Actuator cable; M8 plug; angled; 3-pole; Length: 1.5 m	<a href="http://www.wago.com/756-5112/030-015">www.wago.com/756-5112/030-015</a>
	<b>Item no.: 756-5112/030-050</b> Sensor/Actuator cable; M8 plug; angled; 3-pole; Length: 5 m	<a href="http://www.wago.com/756-5112/030-050">www.wago.com/756-5112/030-050</a>
	<b>Item no.: 756-5302/050-050</b> Sensor/Actuator cable; M12A socket; angled; 5-pole; Length: 5 m	<a href="http://www.wago.com/756-5302/050-050">www.wago.com/756-5302/050-050</a>
	<b>Item no.: 756-5302/050-100</b> Sensor/Actuator cable; M12A socket; angled; 5-pole; Length: 10 m	<a href="http://www.wago.com/756-5302/050-100">www.wago.com/756-5302/050-100</a>
	<b>Item no.: 756-5404/050-020</b> Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole; Length: 2 m	<a href="http://www.wago.com/756-5404/050-020">www.wago.com/756-5404/050-020</a>
	<b>Item no.: 756-5404/050-010</b> Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 5-pole; Length: 1 m	<a href="http://www.wago.com/756-5404/050-010">www.wago.com/756-5404/050-010</a>
	<b>Item no.: 756-5201/030-010</b> Sensor/Actuator cable; M8 socket; straight; M8 plug; straight; 3-pole; Length: 1 m	<a href="http://www.wago.com/756-5201/030-010">www.wago.com/756-5201/030-010</a>
	<b>Item no.: 756-5201/030-020</b> Sensor/Actuator cable; M8 socket; straight; M8 plug; straight; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5201/030-020">www.wago.com/756-5201/030-020</a>
	<b>Item no.: 756-5202/030-020</b> Sensor/Actuator cable; M8 socket; straight; M8 plug; angled; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5202/030-020">www.wago.com/756-5202/030-020</a>
	<b>Item no.: 756-5202/030-010</b> Sensor/Actuator cable; M8 socket; straight; M8 plug; angled; 3-pole; Length: 1 m	<a href="http://www.wago.com/756-5202/030-010">www.wago.com/756-5202/030-010</a>
	<b>Item no.: 756-5203/030-010</b> Sensor/Actuator cable; M8 socket; angled; M8 plug; straight; 3-pole; Length: 1 m	<a href="http://www.wago.com/756-5203/030-010">www.wago.com/756-5203/030-010</a>
	<b>Item no.: 756-5203/030-020</b> Sensor/Actuator cable; M8 socket; angled; M8 plug; straight; 3-pole; Length: 2 m	<a href="http://www.wago.com/756-5203/030-020">www.wago.com/756-5203/030-020</a>

Subject to changes. Please also observe the further product documentation!



Item no.: 756-5302/050-015  
Sensor/Actuator cable; M12A socket; angled; 5-pole; Length: 1.5 m

[www.wago.com/756-5302/050-015](http://www.wago.com/756-5302/050-015)



Item no.: 756-5204/030-020  
Sensor/Actuator cable; M8 socket; angled; M8 plug; angled; 3-pole; Length: 2 m

[www.wago.com/756-5204/030-020](http://www.wago.com/756-5204/030-020)



Item no.: 756-5204/030-010  
Sensor/Actuator cable; M8 socket; angled; M8 plug; angled; 3-pole; Length: 1 m

[www.wago.com/756-5204/030-010](http://www.wago.com/756-5204/030-010)



Item no.: 756-5501/030-010  
Sensor/Actuator cable; M12A socket; straight; M8 plug; straight; 3-pole; Length: 1 m

[www.wago.com/756-5501/030-010](http://www.wago.com/756-5501/030-010)



Item no.: 756-5402/050-020  
Sensor/Actuator cable; M12A socket; straight; M12A plug; angled; 5-pole; Length: 2 m

[www.wago.com/756-5402/050-020](http://www.wago.com/756-5402/050-020)



Item no.: 756-5403/050-020  
Sensor/Actuator cable; M12A socket; angled; M12A plug; straight; 5-pole; Length: 2 m

[www.wago.com/756-5403/050-020](http://www.wago.com/756-5403/050-020)



Item no.: 756-5403/050-010  
Sensor/Actuator cable; M12A socket; angled; M12A plug; straight; 5-pole; Length: 1 m

[www.wago.com/756-5403/050-010](http://www.wago.com/756-5403/050-010)



Item no.: 756-5301/050-100  
Sensor/Actuator cable; M12A socket; straight; 5-pole; Length: 10 m

[www.wago.com/756-5301/050-100](http://www.wago.com/756-5301/050-100)



Item no.: 756-5301/050-050  
Sensor/Actuator cable; M12A socket; straight; 5-pole; Length: 5 m

[www.wago.com/756-5301/050-050](http://www.wago.com/756-5301/050-050)



Item no.: 756-5401/050-010  
Sensor/Actuator cable; M12A socket; straight; M12A plug; straight; 5-pole; Length: 1 m

[www.wago.com/756-5401/050-010](http://www.wago.com/756-5401/050-010)



Item no.: 756-5401/050-020  
Sensor/Actuator cable; M12A socket; straight; M12A plug; straight; 5-pole; Length: 2 m

[www.wago.com/756-5401/050-020](http://www.wago.com/756-5401/050-020)



Item no.: 756-5504/030-010  
Sensor/Actuator cable; M12A socket; angled; M8 plug; angled; 3-pole; Length: 1 m

[www.wago.com/756-5504/030-010](http://www.wago.com/756-5504/030-010)



Item no.: 756-5504/030-020  
Sensor/Actuator cable; M12A socket; angled; M8 plug; angled; 3-pole; Length: 2 m

[www.wago.com/756-5504/030-020](http://www.wago.com/756-5504/030-020)

Configurable connectors

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Item no.: 756-9102/030-000  
Fitted pluggable connector; 3-pole; M8 plug, straight; IDC technology

[www.wago.com/756-9102/030-000](http://www.wago.com/756-9102/030-000)



Item no.: 756-9105/030-000  
Fitted pluggable connector; 3-pole; M8 plug, right angle; IDC technology

[www.wago.com/756-9105/030-000](http://www.wago.com/756-9105/030-000)

## Downloads

### Documentation

#### Manual

Product Manual 8-Channel Digital Input/Output; IO-Link Class A Hub DC 24 V / 2.0 A; 8xM8 Connection; HubLine	V 2.0.0 2022 Jul 19	pdf 3.7 MB	Download
---	------------------------	---------------	----------

#### Instruction Leaflet

I/O System Field package insert	2021 Dec 15	pdf 1.1 MB	Download
---------------------------------	-------------	---------------	----------

#### System Description

WAGO I/O System Field; General Product Information		pdf 1.0 MB	Download
--	--	---------------	----------

## Engineering-Software

### WAGO IO-Link Configurator

WAGO IO-Link Configurator	V5.1.1-6618 2022 Feb 16	ZIP 91.8 MB	Download
---------------------------	----------------------------	----------------	----------

WAGO IO-Link Configurator allows configuration, parameterization, operation and monitoring of WAGO IO-Link Masters in the WAGO I/O System 750 and WAGO I/O System Field, and especially of the WAGO IO-Link devices connected to them.

Additionally, WAGO IO-Link Configurator can be used for complete configuration and operation of all IO-Link devices of third-party manufacturers, as long as they comply with the IO-Link specification. A product's process data can be visualized graphically and stored in trend curves. Up to eight elements can be selected for visualization, and the data can be recorded for up to 24 hours.

Device description files for the IO-Link Masters (IOLM) or IO-Link Devices (IODD) can be used to integrate new devices into the tool at any time. Convenient access to the IO-Link user organization's IO-Link Finder is available for the IODDs. This allows automated, selective download of IODDs when integrating new IO-Link devices. An integrated IODD viewer allows detailed insight into the IODD device description.

WAGO IO-Link Configurator can be used either as a standalone program or integrated into engineering systems with a TCI interface and WAGO-I/O-CHECK.

IO-Link Configurator can also be used to integrate the IO-Link Master (750-657) of the WAGO I/O System 750 Series and to access all the configurator's functions. This is made possible by the WAGO I/O System 750 IO-Link Adapter, which can be retrofitted. The WAGO I/O System 750 IO-Link Adapter requires the current version of WAGO IO-Link Configurator and a current version of WAGO-I/O-CHECK.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



In addition, the download file contains the device descriptions for the respective fieldbus systems of the WAGO I/O System Field modules. These are pre-installed in the Configurator setup.

The WAGO IO-Link Configurator license is assigned to the specific PC on which it is installed (a workstation license).

Register now and test our engineering software for 30 days at no cost.

## Runtime Software

### Firmware

0765-17xx, IO-Field	V 02	zip	Download
WAGO_FW0765_17xx_V01000010_IX02	2023 Feb 2	341.9 kB	

## CAD/CAE-Data

### CAD data

2D/3D Models 765-1702/200-000	URL	Download
-------------------------------	-----	----------

### CAE data

ZUKEN Portal 765-1702/200-000	URL	Download
EPLAN Data Portal 765-1702/200-000	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 765-1702/200-000 8-channel digital input/output; IO Link Class A Hub; DC 24 V / 2.0 A; 8xM8 connection; HubLine	URL	Download
---	-----	----------

## Installation Notes

### Product family

**WAGO I/O System Field**  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!