

## Product Datasheet

### DAC-QSFP-4SFP-10G-3M-C

Dell® Compatible 40Gb/s 4SFP+ Direct Attach Cable  
Copper, Passive, 3m

#### FEATURES

- Compliant with SFF- 8436, SFF-8431, SFF-8432 and SFF-8472
- Up to 10. 3125Gbps data rate per channel
- Up to 7m transmission
- Operating temperature: 0°C to +70°C
- Single 3.3V power supply
- RoHS compliant
- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity

#### APPLICATIONS

##### Data

- Servers
- Networked storage systems
- Routers
- External storage systems
- Data Center networking

##### Communications

- Switches
- Routers

#### INDUSTRIAL STANDARDS

- InfiniBand Trade Association (IBTA)
- IEEE802.3ba
- 40Gigabit Ethernet (40G BASE – CR4)

## Product Datasheet

### DESCRIPTION

ATGBICS QSFP+ (Quad Small Form-factor Pluggable Plus) copper direct-attach cables are suitable for very short distances and offer a highly cost-effective way to establish a 40-Gigabit link between QSFP+ ports of QSFP+ switches within racks and across adjacent racks. These cables are used for 40GbE and Infiniband standards, to maximize performance. QSFP+ are designed to meet emerging data center and high-performance computing application needs for a high-density cabling interconnect system capable of delivering an aggregate data bandwidth of 40Gb/s. This interconnect system is fully compliant with existing industry standard specifications such as the QSFP MSA and IBTA (InfiniBand Trade Association). The QSFP+ cables support the bandwidth transmission requirements as defined by IEEE 802.3ba (40 Gb/s) and Infiniband QDR (4x10 Gb/s per channel) specifications.

## Product Datasheet

### QSFP+ Pin Function Definition


| Pin | Logic       | Symbol  | Description                         |
|-----|-------------|---------|-------------------------------------|
| 1   |             | GND     | Ground                              |
| 2   | CML-I       | Tx2n    | Transmitter Inverted Data Input     |
| 3   | CML-I       | Tx2p    | Transmitter Non-Inverted Data Input |
| 4   |             | GND     | Ground                              |
| 5   | CML-I       | Tx4n    | Transmitter Inverted Data Input     |
| 6   | CML-I       | Tx4p    | Transmitter Non-Inverted Data Input |
| 7   |             | GND     | Ground                              |
| 8   | LVTTL-I     | ModSelL | Module Select                       |
| 9   | LVTTL-I     | ResetL  | Module Reset                        |
| 10  |             | Vcc Rx  | +3.3V Power Supply Receiver         |
| 11  | LVC MOS-I/O | SCL     | 2-wire serial interface clock       |
| 12  | LVC MOS-I/O | SDA     | 2-wire serial interface data        |
| 13  |             | GND     | Ground                              |
| 14  | CML-O       | Rx3p    | Receiver Non-Inverted Data Output   |
| 15  | CML-O       | Rx3n    | Receiver Inverted Data Output       |
| 16  |             | GND     | Ground                              |
| 17  | CML-O       | Rx1p    | Receiver Non-Inverted Data Output   |
| 18  | CML-O       | Rx1n    | Receiver Inverted Data Output       |
| 19  |             | GND     | Ground                              |
| 20  |             | GND     | Ground                              |
| 21  | CML-O       | Rx2n    | Receiver Inverted Data Output       |
| 22  | CML-O       | Rx2p    | Receiver Non-Inverted Data Output   |
| 23  |             | GND     | Ground                              |
| 24  | CML-O       | Rx4n    | Receiver Inverted Data Output       |
| 25  | CML-O       | Rx4p    | Receiver Non-Inverted Data Output   |
| 26  |             | GND     | Ground                              |
| 27  | LVTTL-O     | ModPrsL | Module Present                      |
| 28  | LVTTL-O     | IntL    | Interrupt                           |
| 29  |             | Vcc Tx  | +3.3V Power supply transmitter      |
| 30  |             | Vcc1    | +3.3V Power supply                  |

## Product Datasheet

|           |          |         |                                     |
|-----------|----------|---------|-------------------------------------|
| <b>31</b> | LVTTTL-I | LPMMode | Low Power Mode                      |
| <b>32</b> |          | GND     | Ground                              |
| <b>33</b> | CML-I    | Tx3p    | Transmitter Non-Inverted Data Input |
| <b>34</b> | CML-I    | Tx3n    | Transmitter Inverted Data Input     |
| <b>35</b> |          | GND     | Ground                              |
| <b>36</b> | CML-I    | Tx1p    | Transmitter Non-Inverted Data Input |
| <b>37</b> | CML-I    | Tx1n    | Transmitter Inverted Data Input     |
| <b>38</b> |          | GND     | Ground                              |



Top Side  
Viewed From Top

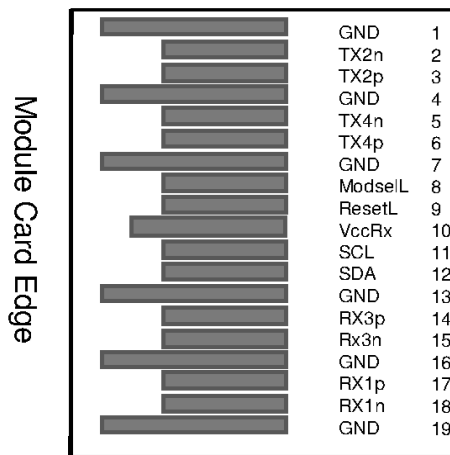


Bottom Side  
Viewed From Bottom

Module Card Edge

## Product Datasheet

### SFP+ Pin Function Definition

| Pin | Logic     | Symbol     | Description                                                                                                 |
|-----|-----------|------------|-------------------------------------------------------------------------------------------------------------|
| 1   |           | VeeT       | Module Transmitter Ground                                                                                   |
| 2   | LVTTL-O   | Tx_Fault   | Module Transmitter Fault                                                                                    |
| 3   | LVTTL-I   | Tx_Disable | Transmitter disable; Turns off transmitter laser output                                                     |
| 4   | LVTTL-I/O | SDA        | 2-wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i)                                           |
| 5   | LVTTL-I/O | SCL        | 2-wire Serial Interface Clock (Same as MOD-DEF1 in INF-8074i)                                               |
| 6   |           | Mod_ABS    | Module Absent, connected to VeeT or VeeR in the module                                                      |
| 7   | LVTTL-I   | RS0        | Rate Select 0, optionally controls SFP+ module receiver                                                     |
| 8   | LVTTL-O   | Rx_LOS     | Receiver Loss of Signal Indication (In FC designated as Rx_LOS and in Ethernet designated as Signal Detect) |
| 9   | LVTTL-I   | RS1        | Rate Select 1, optionally controls SFP+ module transmitter                                                  |
| 10  |           | VeeR       | Module Receiver Ground                                                                                      |
| 11  |           | VeeR       | Module Receiver Ground                                                                                      |
| 12  | CML-O     | RD-        | Receiver Inverted Data Output                                                                               |
| 13  | CML-O     | RD+        | Receiver Non-Inverted Data Output                                                                           |
| 14  |           | VeeR       | Module Receiver Ground                                                                                      |
| 15  |           | VccR       | Module Receiver 3.3 V Supply                                                                                |
| 16  |           | VccT       | Module Transmitter 3.3 V Supply                                                                             |
| 17  |           | VeeT       | Module Transmitter Ground                                                                                   |
| 18  | CML-I     | TD+        | Transmitter Non-Inverted Data Input                                                                         |
| 19  | CML-I     | TD-        | Transmitter Inverted Data Input                                                                             |
| 20  |           | VeeT       | Module Transmitter Ground                                                                                   |

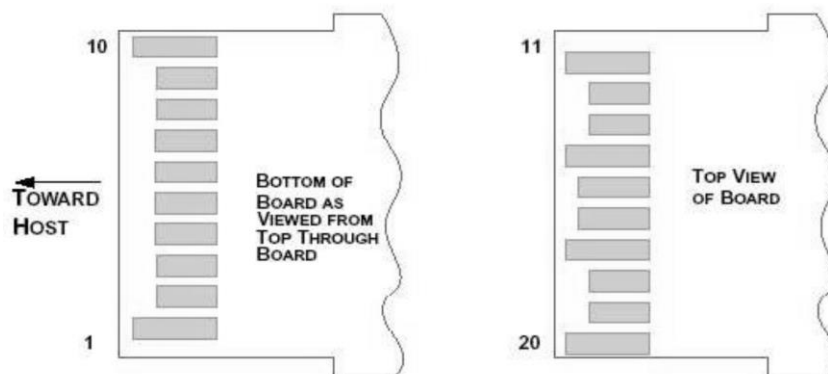

## Product Datasheet

### General Product Characteristics

| Q/4SFP+ DAC Specifications |                                                                 |
|----------------------------|-----------------------------------------------------------------|
| Number of Lanes            | Tx & Rx                                                         |
| Channel Data Rate          | 10.3125 Gbps                                                    |
| Operating Temperature      | 0 to + 70°C                                                     |
| Storage Temperature        | -40 to + 85°C                                                   |
| Supply Voltage             | 3.3 V nominal                                                   |
| Electrical Interface       | 38 pins edge connector (QSFP+)<br>20 pins edge connector (SFP+) |
| Management Interface       | Serial, I2C                                                     |

### High Speed Characteristics

| Parameter                                     | Symbol         | Min    | Typical | Max   | Unit | Note                |
|-----------------------------------------------|----------------|--------|---------|-------|------|---------------------|
| Differential Impedance                        | TDR            | 90     | 100     | 110   | Ω    |                     |
| Insertion loss                                | SDD21          | -17.04 |         |       | dB   | At 5.15625 GHz      |
| Differential Return Loss                      | SDD11          |        |         | See 1 | dB   | At 0.05 to 4.1 GHz  |
|                                               | SDD22          |        |         | See 2 | dB   | At 4.1 to 11.1 GHz  |
| Differential to common mode return loss       | SCD11<br>SCD22 |        |         | -10   | dB   | At 0.2 to 11.1 GHz  |
| Common-mode to common-mode output return loss | SCC11<br>SCC22 |        | -3      |       | dB   | At 0.01 to 11.1 GHz |


#### Notes:

1. Reflection Coefficient given by equation  $SDD11(dB) < -12 + 2 \times \text{SQRT}(f)$ , with f in GHz
2. Reflection Coefficient given by equation  $SDD11(dB) < -6.3 + 13 \times \log_{10}(f/5.5)$ , with f in GHz

## Product Datasheet

### Mechanical Information

The connector is compatible with the SFF-8436 to SFF-8432 specification

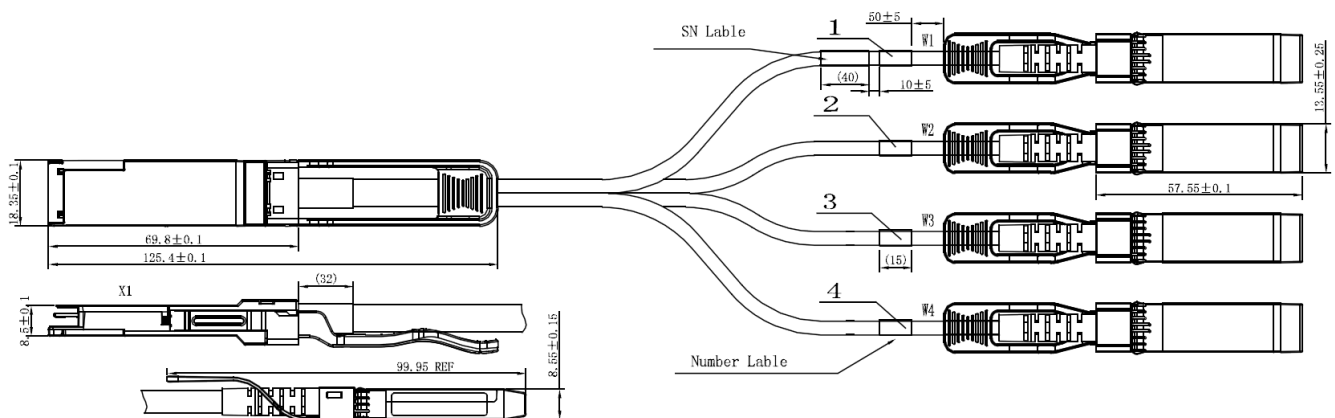

| Length (m) | Cable AWG |
|------------|-----------|
| 1          | 30        |
| 3          | 30        |
| 5          | 26        |
| 7          | 24        |

### Regulatory Compliance

| Feature                                                     | Test Method                                                           | Performance                                                                     |
|-------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------|
| <b>Electrostatic Discharge (ESD) to the Electrical Pins</b> | MIL-STD-883C Method 3015.7                                            | Class 1(>2000 Volts)                                                            |
| <b>Electromagnetic Interference (EMI)</b>                   | FCC Class B<br>CENELEC EN55022 Class B<br>CISPR22 ITE Class B         | Compliant with Standards                                                        |
| <b>RF Immunity (RFI)</b>                                    | IEC61000-4-3                                                          | Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz |
| <b>RoHS Compliance</b>                                      | RoHS Directive 2011/65/EU and it's Amendment Directives (EU) 2015/863 | RoHS (EU) 2015/863 compliant                                                    |
| <b>REACH Compliance</b>                                     | REACH Regulation (EC) No 1907/2006                                    | REACH (EC) No 1907/2006 compliant                                               |

## Product Datasheet

### AWG Information

| Reach @ 10Gb/s (m) | AWG   |
|--------------------|-------|
| 0.5                | 30    |
| 1                  | 30    |
| 2                  | 30    |
| 3                  | 28/30 |
| 4                  | 28    |
| 5                  | 24    |
| 7                  | 24    |