


NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
 - ② PLATING: ELECTRO TIN (.0003 MIN) TIN-PLATED BRASS NON-FUNNEL FERRULE
 - ③ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: (+.005)
- 02 = .094 413 = 413
 04 = .119 76 = 453
 06 = .146 12 = 515
 08 = .173
 10 = .198
 14 = .265
 56 = .328
 38 = .390
 209 = .209
- “UL” LISTING # E32244
 “CSA” LISTING # 18689
- WIRE SIZE: 12 - 10 AWG²
 4.0 - 6.0 MM²

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

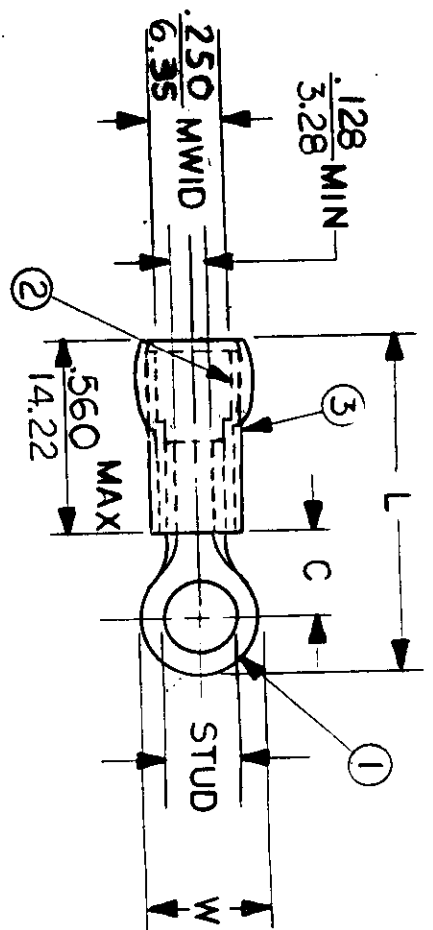

FILE NO.

C-CD-801-05

PART NUMBER	"W"	"C"	"L"	SCALE:	DATE	TITLE:	DWG. NO.	CUSTOMER DWG.
C-801-	.750 ±.010	.611 15.51	1.580 40.13	NTS	9-22-87	RING TONGUE TERMINAL AVIKRIMP 800-SERIES	A	
C-828-	.375 9.53	.303 7.70	1.091 27.71					
C-830-	.530 13.46	.393 9.98	1.258 31.95					
C-836-	.282 7.16	.306 7.77	1.047 26.59					
C-840-	.592 15.04	.466 11.83	1.362 34.59					
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	DATE	TITLE:			
FRAC.	DEC.	ANG.	DRWN. BY: EMF	CHKD. BY:	APPRD. BY:			
±	±	±						