



## 1 Watt RF Load Up to 40 GHz with 2.92mm Female

### RF Terminations Technical Data Sheet

PE6TR1108

#### Features

- 50 Ohm RF Load
- DC to 40 GHz Frequency Range
- VSWR 1.15:1 Max
- Max Power 1 Watt (CW)
- 2.92mm Female Coaxial Interface

#### Applications

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

#### Description

RF termination (also called RF load or dummy load) PE6TR1108 from Pasternack operates from DC to 40 GHz and handles up to 1 Watt (CW). This 2.92mm termination (or load) is a 50 Ohm impedance and has a Female gender. PE6TR1108 50 Ohm 2.92mm load termination offers 1.15:1 max VSWR. RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Pasternack offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).

#### Electrical Specifications

| Description      | Minimum | Typical | Maximum | Units |
|------------------|---------|---------|---------|-------|
| Frequency Range  | DC      |         | 40      | GHz   |
| Impedance        |         | 50      |         | Ohms  |
| VSWR             |         |         | 1.15:1  |       |
| Input Power (CW) |         |         | 1       | Watt  |

#### Mechanical Specifications

##### Size

|        |                   |
|--------|-------------------|
| Length | 0.76 in [19.3 mm] |
| Width  | 0.31 in [7.87 mm] |

##### Configuration

|            |               |
|------------|---------------|
| Connector  | 2.92mm Female |
| Hex Size   | 5/16 inch     |
| Durability | 500 Cycles    |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 40 GHz with 2.92mm Female PE6TR1108](#)



## 1 Watt RF Load Up to 40 GHz with 2.92mm Female

### RF Terminations Technical Data Sheet

PE6TR1108

#### Material Specifications

| Description         | Material                   | Plating |
|---------------------|----------------------------|---------|
| Connector 1 Contact | Beryllium Copper           | Gold    |
| Outer Conductor     | Passivated Stainless Steel |         |
| Body                | Passivated Stainless Steel |         |

Mechanical Specification Notes:  
Interface: MIL-STD-348B

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +105 deg C

Humidity

MIL-STD-202, Method 106

Thermal Shock

MIL-STD-202, Method 107, Condition B

Salt Spray

MIL-STD-202, Method 101, Condition B

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

1 Watt RF Load Up to 40 GHz with 2.92mm Female from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 40 GHz with 2.92mm Female PE6TR1108](#)


URL: <https://www.pasternack.com/1-watts-2.92mm-female-rf-load-40-ghz-pe6tr1108-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6TR1108 CAD Drawing

## 1 Watt RF Load Up to 40 GHz with 2.92mm Female

| REVISIONS |                 |            |
|-----------|-----------------|------------|
| REV.      | DESCRIPTION     | DATE       |
| A         | INITIAL RELEASE | 01/05/2021 |
|           |                 | APPROVED   |
|           |                 | SPONG      |

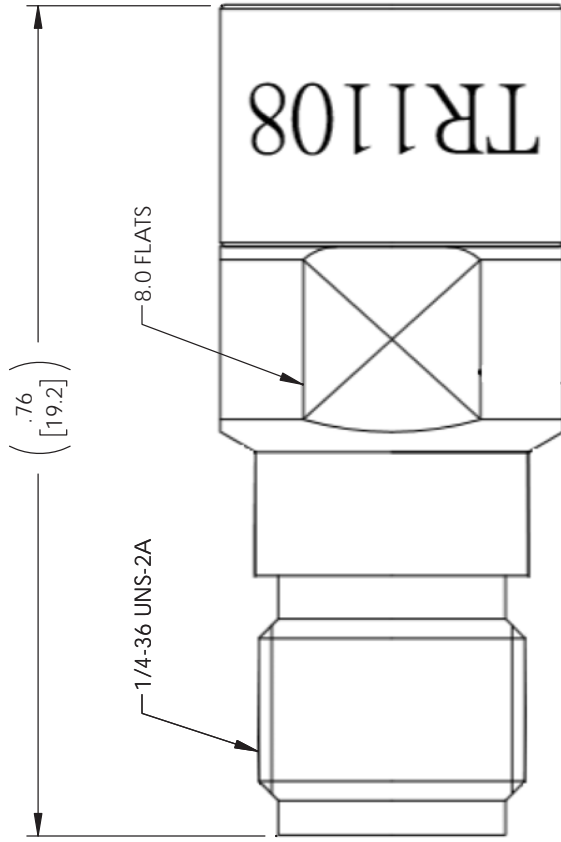

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE IN INCHES  
DIMENSIONS IN [ ] ARE IN MILLIMETERS

TOLERANCES:

X = +.2 [5.08]      FRACTIONS  
 XX = +.02 [ .51]      +.132  
 .XXX = ±.005 [ .13]      ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +.1 [25] / -0  
 12 [305] < L ≤ 60 [1524] = +.2 [51] / -0  
 60 [1524] < L ≤ 120 [3048] = +.4 [102] / -0  
 120 [3048] < L ≤ 300 [7620] = +.6 [152] / -0  
 300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.



**PASTERNAK**  
an INFINITI® brand

Pasternack Enterprises, Inc.  
P. O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION



THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

|      |           |            |           |
|------|-----------|------------|-----------|
| SIZE | CAGE CODE | DRAWN BY   | ITEM NO.  |
| A    | 53919     | DFRISIELLO | PE6TR1108 |
|      |           | REV        | A         |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.