


LOC DIST
— —

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).	22JUL2014	TJ	JK

NUMMER 829309
VERWENDET FÜR
WAR NR. E88-52544

POLZ. PRO REIHE	L±0.4	BESTELL-NR.
-	-	-
2	5.08	2-2
3	7.62	-3
4	10.16	-4
5	12.70	829 309 5-3
6	15.24	-6
7	17.78	7-3
8	20.32	-8
9	22.86	-9
10	25.40	1-0-3
11	27.94	1-1-2
12	30.48	1-2-2
13	33.02	1-3-2
14	35.56	1-4-2
15	38.10	1--5
16	40.64	1--6-3
17	43.18	1--7
18	45.72	1--8
19	48.26	1--9
20	50.80	2--0
21	53.34	2--1
22	55.88	2--2
23	58.42	2--3
24	60.96	2--4
25	63.50	2--5-3
26	66.04	2--6
27	68.58	2--7
28	71.12	2--8-3
29	73.66	2--9
30	76.20	3--0
31	78.74	3--1
32	81.28	3--2-2
33	83.82	3--3
34	86.36	3--4-2
35	88.90	3--5
36	91.44	3--6
37	93.98	3--7
38	96.52	3--8
39	99.06	3--9
40	101.60	4--0
41	104.14	4--1
42	106.68	4--2
43	109.22	4--3
44	111.76	4--4
45	114.30	4--5
46	116.84	4--6
47	119.38	4--7
48	121.92	4--8
49	124.46	4--9
50	127.00	5-829 309 0-2

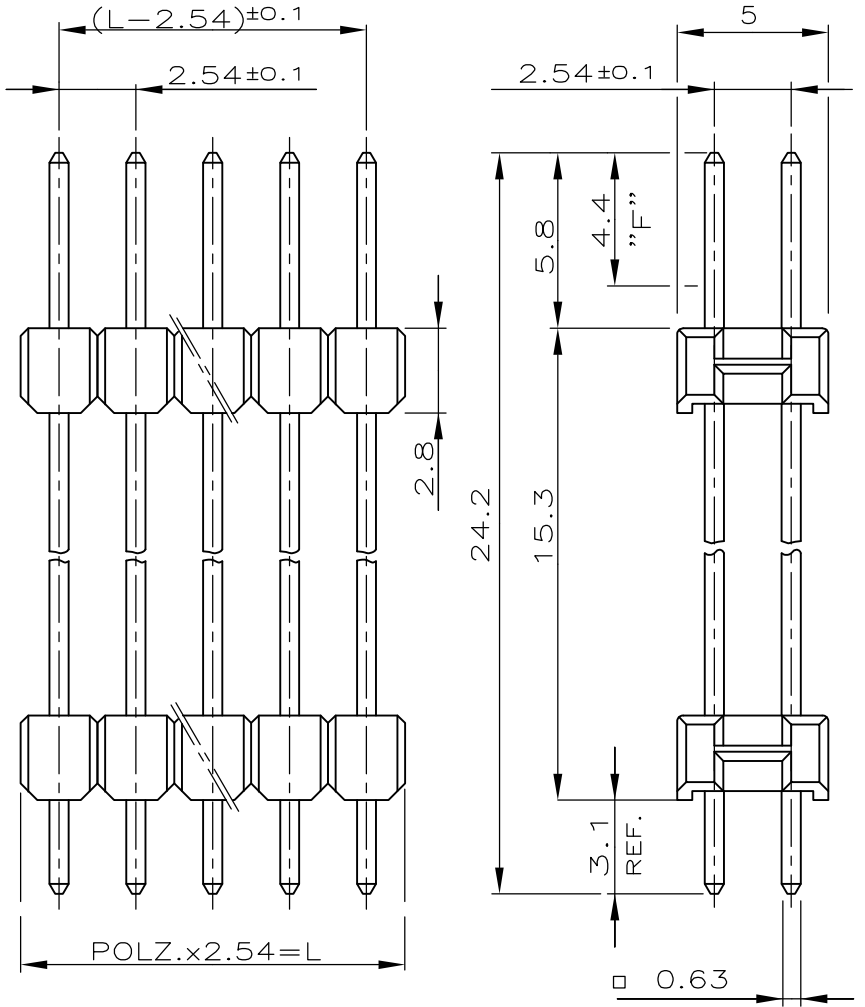

- 1
- 2
- 3

STECKSEITE: IM BEREICH "F" 0.7µm PdNi+0.1µm GOLD FLASH ÜBER 1.27µm NICKEL
LÖTSEITE: MIN. 2.5µm ZINN ÜBER 1.27µm NICKEL

OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSELETE

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	1
STIFTGEHÄUSE	PBT	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90..

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION

DIMENSIONS: mm	DWN	17.07.89	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	M.Schaarschmidt	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD					
±0.2 mm			108-18012	SPEZ. AMPMODU II STIFTLISTE		
0 PLC ± -			APPLICATION SPEC	ZWEIREIHIG		
1 PLC ± -				SIZE	CAGE CODE	DRAWING NO
2 PLC ± -				A4	00779	C-829309
3 PLC ± -				RESTRICTED TO		
4 PLC ± -				-		
ANGLES ± -			WEIGHT	-		
			CUSTOMER DRAWING	SCALE	4:1	SHEET 1 OF 1
						REV E