


### 3HE10550AA-4WDM-20-I-C

Alcatel-Lucent Nokia® 3HE10550AA-4WDM-20-I Compatible TAA 100GBase-4WDM-20 QSFP28 Transceiver (SMF, 1295nm to 1309nm, 20km, LC, -40 to 85C)

#### Features:

- QSFP28 MSA compliant
- Supports 103Gbps
- Single 3.3V Power Supply and Power dissipation < 4.8W
- Up to 20km over SMF
- Operating case temperature: -40C to 85C
- Four 25Gbps DFB-based LAN-WDM transmitter
- PIN and TIA array on the receiver side
- 4x25G electrical interface
- Duplex LC receptacles
- I2C interface with integrated Digital Diagnostic Monitoring
- RoHS compliant

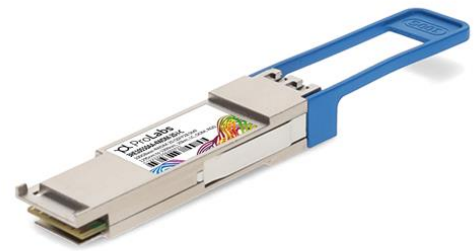

#### Applications:

- 100GBase Ethernet
- Access and Enterprise

#### Product Description

This Alcatel-Lucent Nokia® 3HE10550AA-4WDM-20-I compatible QSFP28 transceiver provides 100GBase-4WDM-20 throughput up to 20km over single-mode fiber (SMF) using a wavelength of 1295nm to 1309nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Alcatel-Lucent Nokia® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		3.6	V
Storage Temperature	TS	-40		+85	°C
Operating Case Temperature	Tc	-40	25	85	°C
Operating Relative Humidity	RH	5		85	%
Receiver Damage Threshold, per Lane	Rxdmg	5.5			dBm

## Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Dissipation	PD			4.8	W	
<b>Transmitter</b>						
Differential data input swing per lane				900	mv <sub>p-p</sub>	
Input Impedance (Differential)	Zin			10	%	
<b>Stressed Input Parameters</b>						
Eye width		0.46			UI	
Applied pk-pk sinusoidal jitter		IEEE 802.3bm Table 88-13				
Eye height		95			mv	
DC common mode voltage		-350		2850	mv	
<b>Receiver</b>						
Differential output amplitude		200		900	mv <sub>p-p</sub>	
Output Impedance (Differential)	Zout			10	%	
Output Rise/Fall Time	tr/tf	12			ps	20%~80%
Eye width		0.57			UI	
Eye height differential		228			mv	
Vertical eye closure				5.5	dB	

## Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
Signaling Speed per Lane	BRAVE		25.78		Gbps	
Data Rate Variation		-100		+100	ppm	
Lane_0 Center Wavelength	$\lambda_{C0}$	1294.53	1295.56	1296.59	nm	
Lane_1 Center Wavelength	$\lambda_{C1}$	1299.02	1300.05	1301.09	nm	
Lane_2 Center Wavelength	$\lambda_{C2}$	1303.54	1304.58	1305.63	nm	
Lane_3 Center Wavelength	$\lambda_{C3}$	1308.09	1309.14	1310.19	nm	
Total Average Output Power	Po			10.5	dBm	
Average Launch Power per Lane	Peach	-4.3		4.5	dBm	1
Optical Modulation Amplitude (OMA) each Lane	TxOMA	-1.3		4.5	dBm	
Difference in launch power between any two lanes (OMA)				5	dBm	
Launch power in OMA minus TDP, each lane		-2.3			dBm	
Transmitter and dispersion penalty (TDP), each lane				2.8	dB	
Extinction Ratio	ER	4			dB	
Side-mode suppression ratio	SMSR <sub>min</sub>	30			dB	
Average launch power of OFF transmitter per lane				-30	dBm	
Relative Intensity Noise	RIN			-130	dB/hz	
Transmitter Reflectance				-26	dB	
Optical Return Loss Tolerance				20	dB	
Transmitter Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3}		{0.25, 0.4, 0.45, 0.25, 0.28, 0.4}				2
<b>Receiver</b>						
Signaling Speed per Lane	BRAVE		25.78		Gbps	
Data Rate Variation		-100		+100	ppm	
Damage threshold per Lane	Rxdmg	5.5			dBm	
Lane_0 Center Wavelength	$\lambda_{C0}$	1294.53	1295.56	1296.59	nm	
Lane_1 Center Wavelength	$\lambda_{C1}$	1299.02	1300.05	1301.09	nm	
Lane_2 Center Wavelength	$\lambda_{C2}$	1303.54	1304.58	1305.63	nm	
Lane_3 Center Wavelength	$\lambda_{C3}$	1308.09	1309.14	1310.19	nm	
Average Receive Power per Lane	Rxpow	-14.5		4.5	dBm	3
Receive Power (OMA) per Lane	RxOMA			4.5	dBm	
Receive Sensitivity in OMA per Lane	Rxsens			-12.5	dBm	
Stressed Receiver Sensitivity (OMA) per Lane	RXSRS			-10	dBm	4
Optical Return Loss	ORL			-26	dB	
LOS Assert	LOSA	-25			dBm	



## Pin Descriptions


Pin	Logic	Symbol	Name/Descriptions	Plug Sequence	Ref.
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3	
4		GND	Ground	1	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	3	
7		GND	Ground	1	1
8	LVTTTL-I	ModSelL	Module Select	3	
9	LVTTTL-I	ResetL	Module Reset	3	
10		VccRx	+3.3V Power Supply Receiver	2	2
11	LVCMOS- I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVCMOS- I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	1
14	CML-O	Rx3p	Receiver Non-Inverted Data output	3	
15	CML-O	Rx3n	Receiver Inverted Data output	3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data output	3	
18	CML-O	Rx1n	Receiver Inverted Data output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data output	3	
23		GND	Ground	1	1
24	CML-O	Rx4n	Receiver Inverted Data output	3	
25	CML-O	Rx4p	Receiver Non-Inverted Data output	3	
26		GND	Ground	1	1
27	LVTTTL-O	ModPrsL	Module Present	3	
28	LVTTTL-O	IntL	Interrupt	3	
29		VccTx	+3.3V Power Supply Transmitter	2	2
30		Vccl	+3.3V Power Supply	2	2
31	LVTTTL-I	LPMode	Low Power Mode	3	
32		GND	Ground	1	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Input	3	
35		GND	Ground	1	1

36	CML-I	Tx1p	Transmitter Non-Inverted Data input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Input	3	
38		GND	Ground	1	1

**Notes:**

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1 and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table 6. Recommended host board power supply filtering is shown in Figures 3 and 4. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP28 Module in any combination. The connector pins are each rated for a maximum current of 500Ma.

**Mechanical Specifications**

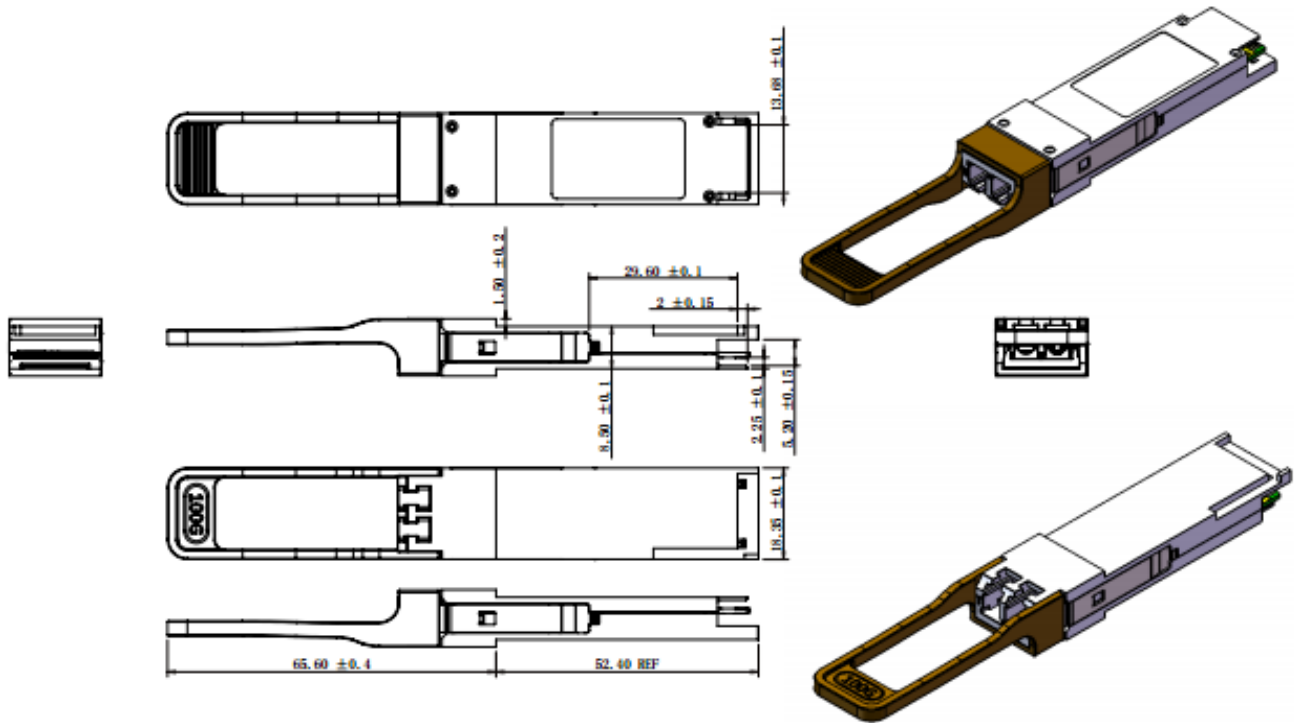

## **About ProLabs**

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

## **Complete Portfolio of Network Solutions**

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## **Trusted Partner**

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

## **Contact Information**

ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)

Telephone: 952-852-0252

ProLabs UK

Email: [salessupport@prolabs.com](mailto:salessupport@prolabs.com)

Telephone: +44 1285 719 600