



| ISSUE NUMBER | |
|--------------|-----|
| ORIGINAL | (1) |

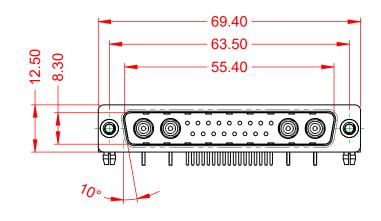




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:

.XX ±0.13 .XXX ±0.05

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

50Ω (IMPEDANCE) $10m\Omega$ MAX.


-55°C ~ 125°C

5000MΩ min.

1000V AC rms



| COMBINATION D-SUB | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | |
|--|--|--------------------------------------|------------------|-------|
| | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | CHECKED: | DATE: | | |
| EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| | | DRAWING NUMBER: 629-21W4 | 4640-5NB | ISSUE |
| | | PART NUMBER: 629-21W4 | 4640-5NB | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

