

Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC YE



Part No.:	261.340.70		NoHS2		UK
Series:	EvoSIGNAL	7	КОП 32	C QL) US	CA

MECHANICAL DATA		
Height	130 mm	
Diameter	85 mm	
Materials	PC PC/ABS	
Dome colour	Yellow	
Housing colour	Grey	
Protection category	IP66	
Connection	Push-in terminal	
cross-sectional area minimum	0,25mm ² / 24AWG	
cross-sectional area maximum	1,50mm ² / 16AWG	
Type of fixing	Adapter required	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	213 g	
Product weight	171 g	

ELECTRICAL DATA	
Operating voltage	12V
	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	120 mA
Rated inrush current	1A
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

OPTICAL DATA			
Light source	LED		
Light colour	Yellow		
Optical signal image	Revolving		
Service life optical	50,000 h minimum		
Rotation speed (rpm)	180 U/min		
Pulse- & pause Duration [ms]	55ON, 278OFF		

APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC YE


Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	406

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC YE

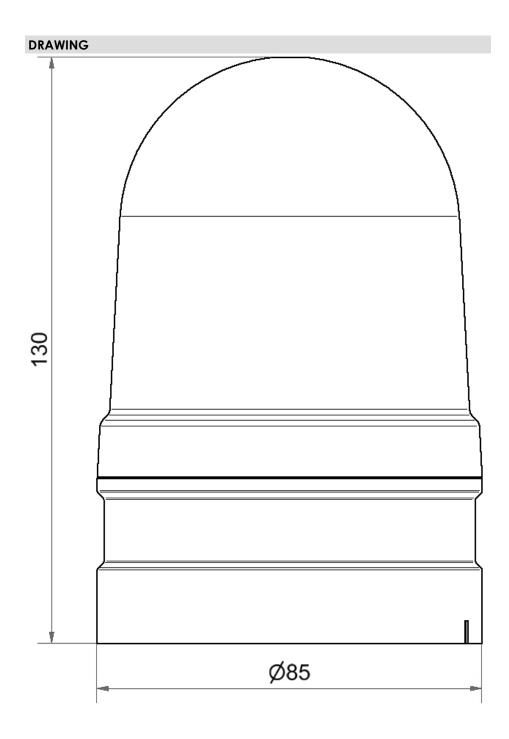

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.