


1.Wiring Diagram.

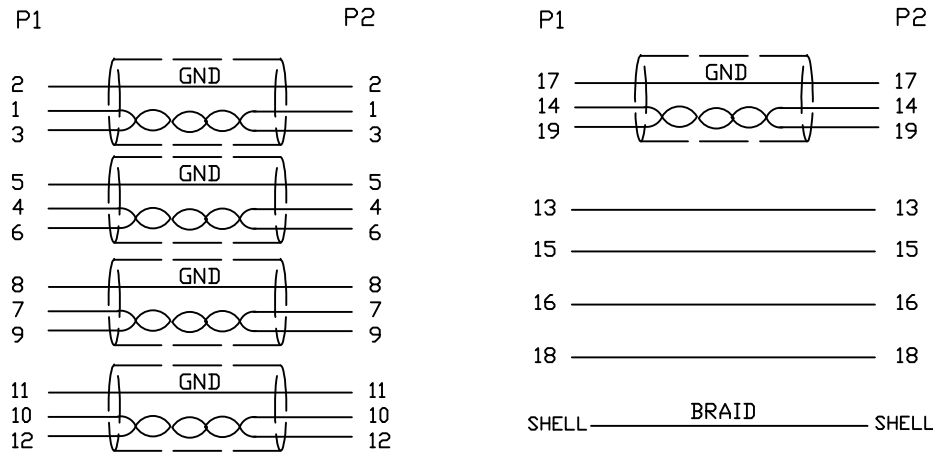

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE polybag.

NO.		PART NO.	DESCRIPTION	QTY	UNIT/REF	APPROVAL		SHEET 1 OF 1	
5	COOPER	W20MM*L35MM		2		DRAWN <i>EDWINLAI</i> DATE <i>2/28/17</i>		TITLE HDMI A/M TO HDMI A/M CABLE	
4	PVC	45P PVC BLACK OVERMOLD		25g		CHECKED <i>Win.C</i> DATE <i>2/28/17</i>		DWN NO. 740-10011-00200 REV <i>A</i>	
3	PE	LLDPE 500026 6201 INSIDE MOLDING		16g		APPROVAL		CUSTOMER P/N:	
2	CONN	HDMI A TYPE MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK		2	P1,P2	CUSTOMER:		REV	
1	CABLE	UL20276 [28AWG (7/0.12TA) *1P+D(7/0.12TA)*1C+AL]*5+28AWG (7/0.12TA) *4C +AEM(16/6/0.12AM) OD7.3 BLACK		1	2000mm	CUSTOMER:		REV	
BILL OF MATERIAL					2017/4/20				