
Ξ	G	П	m	O





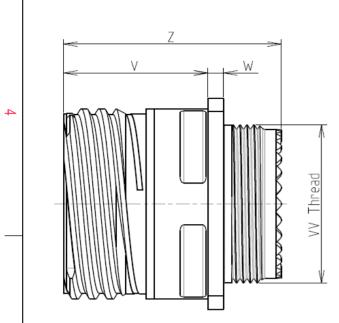

LAYOUT SHOWN AS

Keying Shown as example

Connector dimension

Nominal

Dim


CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

	Standard - Based on h	IL-DIE-30333 Series III										
		: Stainless Steel					Р	3.25±0.2				
							PP	5.49±0.2				
	-Shell Plating	: Nickel					R1	18.26				
	-Insulator	: Thermoplastic					R2	15.09				
	-Contacts	: Copper Alloy					S	23.8±0.3	-			
	-Seals & Grommet	: Silicon Elastomer					V	20.83+0/-1.25	4			
							w	2.1/2.5	4			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimun	n				Z	31.5 Max	4	-		
	-Durability	: 500 Mating cycles					VV THREAD	M12x1-6g				
	-Delivered without Sou	iriau contacts										
	-Temperature Range	: -65°C to +200°C									03-10-2	016
	-Salt Spray	: 500 hours								A	03-10-2	010
	-Mass	: 24.03 g ± 10%								ISS		-
										Design	ned By:	
											TITLE	
	BASIC SERIES:	8D 0 - 09	S	98	S	D	L			SC/	ALE	
→	SHELL TYPE : Square F	lange Receptacle						Delivered W/	O Contacts	N	A	τ
	CONTACT TYPE : Sta	ndard Crimp Contact						ORIEN	ITATION : D	so	URIA	
	SHELL SIZE : 09 CONTACT TYPE : SOCKET(500 Matings)									.0		
	PLATING : S =	Nickel						CONTACT LAYO	OUT : 09-98	FOR	MAT	
										A	.3	
	Н	G			F			E	1	D		

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

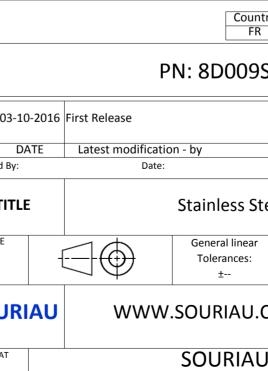

С

	Φ		Þ				
				4			
OUT SHOWN AS EXA	AMPLE			3			
ot be liable for any r of the Products whic issued by either of t nal recommendatio Country FR N: 8D009S9	h does not co he Parties or l n, technical n Jurisc	mply with by a third party	l List	2			
				_			
1 - by			MOD N DRAWING	-			
Stainless Steel Receptacle 8D series General linear Tolerances: ±							
SOURIAU.COM it must not be reproduced or communicated without permission							
SOURIAU DRG N°SHEET8D009S98SDL-C1/2							
	B		A]			

		G	гт –	т	U	0	
		Contact Layout				Ρ	anel Cutou
4	-X	$ \begin{array}{c} $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Shell Arrangement Numb size 9 -98 3	X.axis (mm) Y-axis (mm) + 0.65 (1.65) + 0.38 (0.97) + 0.00 (0.00) - 0.75 (1.91) - 0.65 (1.65) + 0.38 (0.97)					ØT_
ى						Dim ØA ØAA R1 ØT	
	L						
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N						PN: 8[Countr FR
					A 03-10-20	116 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					SCALE		less Ste
_					NA		eral linear erances: ±
					SOURIA	U WWW.SOUI	RIAU.C
					FORMAT A3		JRIAU 009S9
·	Н	G	F	E	D	C	

