


т	۵	п –	m	0	
					_

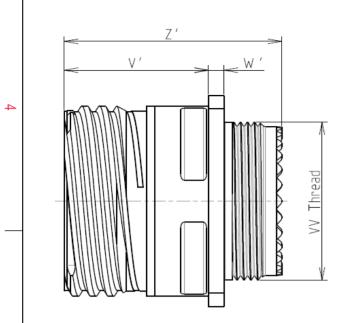

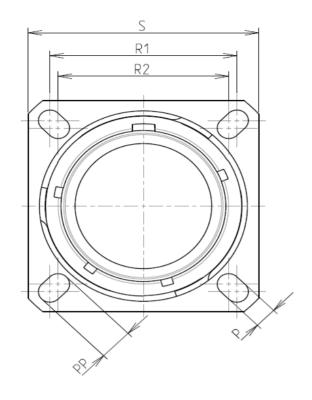



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

SHELL TYPE : Square Flange Receptacle

SHELL SIZE : 17

PLATING : M = Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-					
	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 2000 hours			
_	-Mass	: 39.9 g ± 10%			
	BASIC SERIES:	8D 0 - 17 M 75 S C			

G

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
/V THREAD	M25x1-6g


ORIENTATION : C

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend

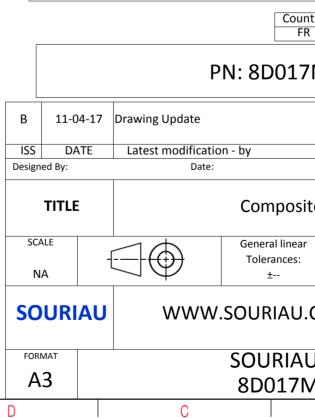

	Φ		Þ		
	Re				4
S EXA	AMPLE				3
s which er of t indatic untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty		2
					_
		CUSTOME	R DRAWING	MOD N°	
site Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
			cument is the pro	perty of	1
J.CC	M	it mus	SOURIAU st not be reproduc icated without pe	ced or	
	DRG N°			SHEET	
M7	75SC-C	I		1/2]
	В		А		

-	Ŧ	۵	н г	m	D	0	
		Contact Layout 75				Pane SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	el Cuto
4					λ δε		
	Ctc A	2#8 Triax 17-75 X Y 0 4.75			¥	Max. thickness panel for receptacle: Type 0:	
ω	В	0 -4.75				Dim ØA ØAA R1 ØT	
	_						
						SOURIAU shall not be liable due to a use of the Prod the Specifications issued by e (professional recom	lucts w either o menda
N						PN: 8D(Count FR 017
					ISS DATE Designed By:	Date:	
_					SCALE NA	Comp General Toleran ±	linear nces:
					FORMAT	SOUR	RIAU
	Н	G	F	E	A3	8D02	<u>17N</u>

