

DESCRIPTION

The NEXEM EP2 / EP1 series are PC-board mount type automotive relays suitable for various motor controls and other applications that require a high level of quality and performance.

EP2 series is a twin-relay and divided into two types with different usage.

One is an H-bridge type designed for forward and reverse control of the motors, and the other is a separate type containing two separated relays in one package.

EP1 series is a 1 Form c relay equivalent to EP2 series in performance.

FEATURES

- For motor reversible control and solenoid control
- Approx. 50% less relay space than conventional relay
- High performance and productivity by unique structure
- Flux tight housing

APPLICATIONS

- Power window
- Antenna lifter
- Auto-seat positioning
- Electrical door lock
- Passive seat belt control
- Keyless/Remote entry system
- Sliding roof control



EP2 SERIES



EP1 SERIES

For Proper Use of Miniature Relays **DO NOT EXCEED MAXIMUM RATING**

Do not use relay under excessive conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to the relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE

Read the cautions described in EM Devices' "Miniature Relays" before dose designing your relay applications.

The information in this document is subject to change without notice.



© EM Devices Corporation 2018




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

SCHEMATIC (BOTTOM VIEW)

EP2 SERIES





EP1 SERIES




DIMENSIONS mm (inch)

EP2 SERIES

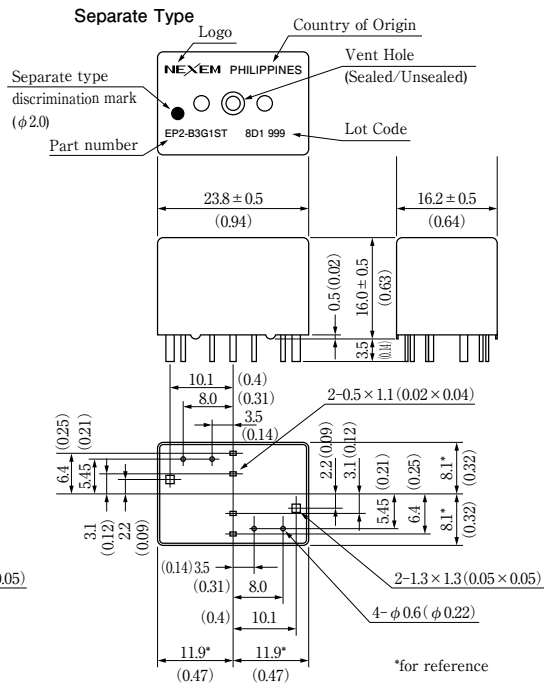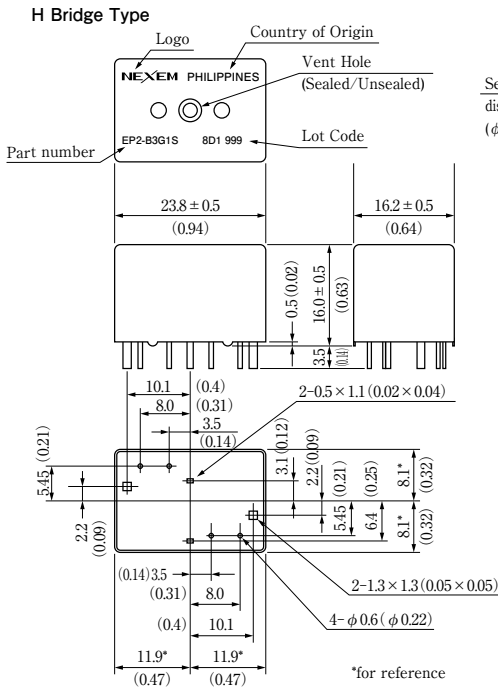


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.


EP1 SERIES

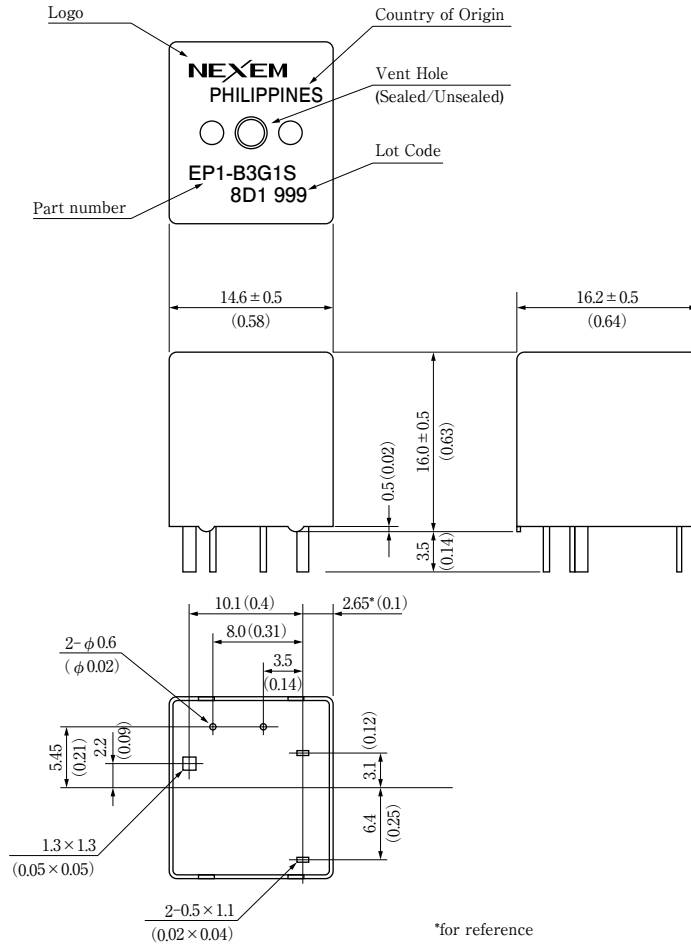

PCB PAD LAYOUT mm (inch) (BOTTOM VIEW)
EP2 SERIES

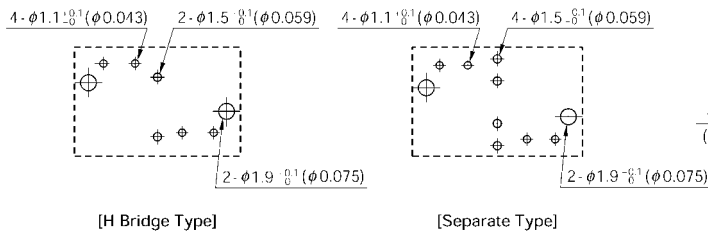

EP1 SERIES



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

SPECIFICATIONS

Items	EP2	EP1
Contact Form	1 Form c × 2 (H bridge type and separate type)	1 Form c
Contact Material	Silver oxide complex alloy(special type available)	
Contact Resistance	50 mΩ max. (measured at 7 A) initial	
Contact Switching Voltage	16 VDC max.	
Contact Switching Current	25 A max. (at 16 VDC)	
Contact Carrying Current	20 A max. (1 hour max.), 25 A max. (2 minutes max.) at 12 VDC	25 A max. (1 hour max.), 30 A max. (2 minutes max.) at 12 VDC
Operate Time	Approx. 5 ms (at 12 VDC) initial	
Release Time	Approx. 2 ms (at 12 VDC) initial. without diode	
Normal Operate Power	0.48 W / 0.64 W (at 12 VDC)	
Insulation Resistance	100 MΩ min. (at 500 VDC) initial	
Breakdown Voltage	500 VAC min. (for 1 minute) initial	
Shock Resistance	98 m / s ² min. (misoperating), 980 m / s ² min. (destructive failure)	
Vibration Resistance	10 to 300 Hz, 43 m/s ² min. (misoperating) 10 to 500 Hz, 43 m/s ² , 200 hours (destructive failure)	
Ambient Temperature	-40 °C to +85 °C (-40 °F to +185 °F)	
Coil Temperature	50 °C / W (122 °F /W)(contact carrying current 0 A)	
Life Expectancy	Mechanical	1 × 10 ⁶ operations
	Electrical	100 × 10 ³ operations (at 14 VDC. Motor Load 20 A / 3 A)
Weight	Approx. 15 gn (0.53 oz)	Approx. 8 gr (0.28 oz)

COIL RATING

EP2 SERIES

at 20°C (72°F)

Part Number		Nominal Voltage (VDC)	Coil Resistance (Ω ±10%)	Nominal Current (mA)	Must Operate Voltage (VDC max.)	Must Release Voltage (VDC min.)	Nominal Operate Power (W)
H Bridge Type	Separate Type						
EP2-3L1	EP2-3L1T	12	225	53.5	6.5	0.9	0.64
EP2-3L2	EP2-3L2T	12	225	53.5	7.0	0.9	0.64
EP2-3L3	EP2-3L3T	12	225	53.5	7.5	0.9	0.64
EP2-4L3	EP2-4L3T	12	300	40.0	7.5	0.9	0.48
EP2-4L4	EP2-4L4T	12	300	40.0	8.0	0.9	0.48
EP2-4L5	EP2-4L5T	12	300	40.0	8.5	0.9	0.48

* High carrying current type available

EP1 SERIES


at 20°C (72°F)

Part Number		Nominal Voltage (VDC)	Coil Resistance (Ω ±10%)	Nominal Current (mA)	Must Operate Voltage (VDC max.)	Must Release Voltage (VDC min.)	Nominal Operate Power (W)
Regular Type	High Carrying Current Type						
EP1-3L1	EP1-B3G1	12	225	53.3	6.5	0.9	0.64
EP1-3L2	EP1-B3G2	12	225	53.3	7.0	0.9	0.64
EP1-3L3	EP1-B3G3	12	225	53.3	7.5	0.9	0.64
EP1-4L3	EP1-B4G3	12	300	40.0	7.5	0.9	0.48
EP1-4L4	EP1-B4G4	12	300	40.0	8.0	0.9	0.48
EP1-4L5	EP1-B4G5	12	300	40.0	8.5	0.9	0.48




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.


NUMBERING SYSTEM

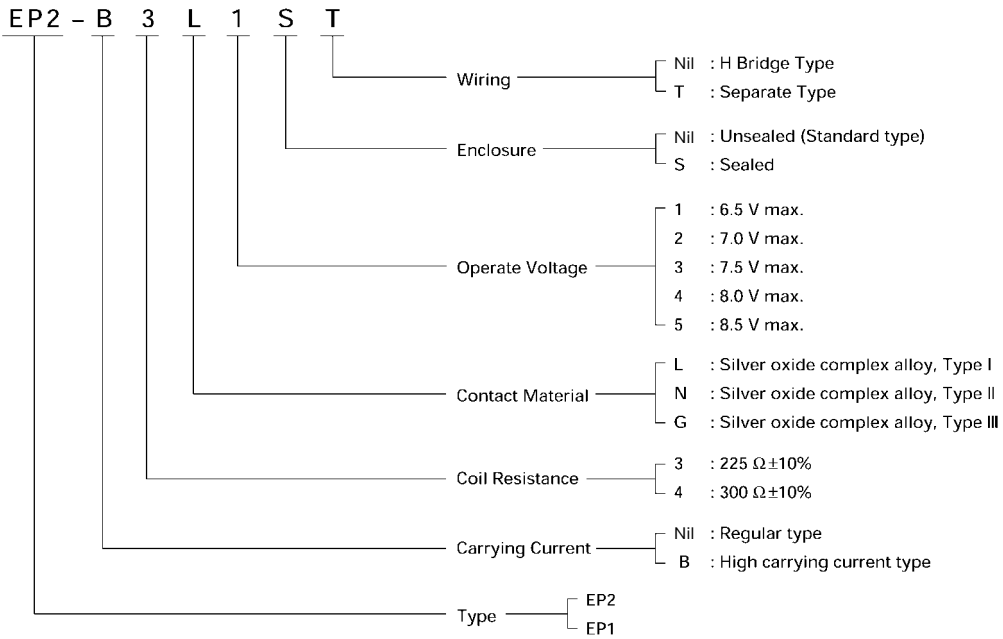

TYPICAL APPLICATION (H Bridge Type)

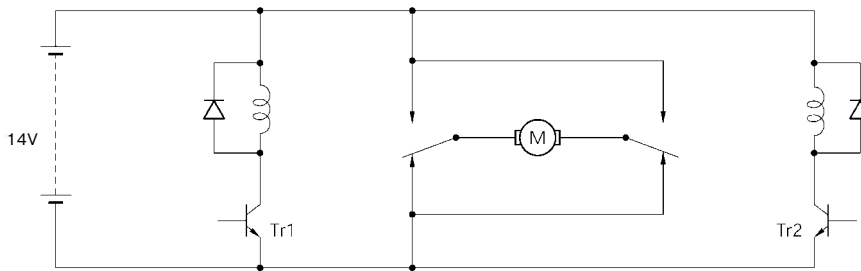

MOTOR	Tr1	Tr2
STOP	off	off
FORWARD	on	off
REVERSE	off	on





It is necessary to take more than 100 ms intervals for on / off timing between driving Tr1 and Tr2. If the interval is less than 100 ms, an excessive current flow may happen to the relay contacts.




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

TECHNICAL DATA


Coil Temperature Rise (EP2-3L1)

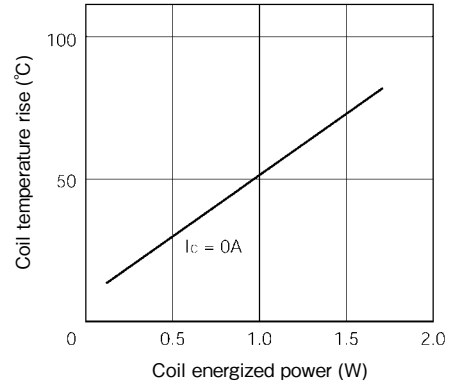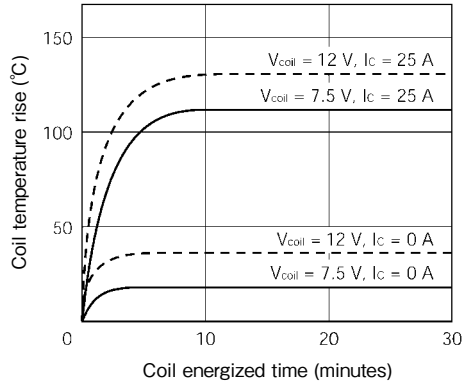

Operate Time (EP2-3L1)

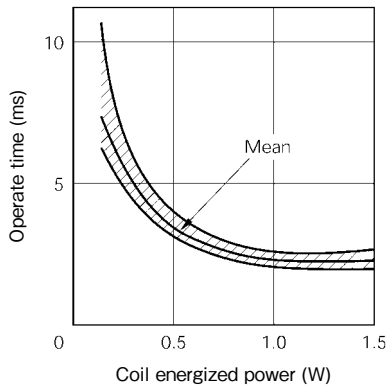

Release Time (EP2-3L1)

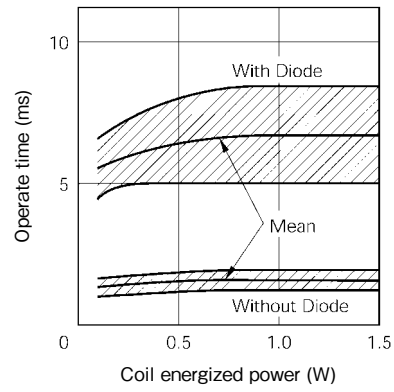

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of EM Devices Corporation. EM Devices Corporation assumes no responsibility for any errors which may appear in this document.

EM Devices Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of EM Devices Corporation or others.

The possibility of defects cannot be eliminated entirely even though EM Devices Corporation has been making continuous effort to enhance the reliability of its electronic components. To minimize risks of damage or injury to persons or property arising from a defect in an EM Devices electronic component, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features. EM Devices products are classified into the following three quality grades:

"Standard," "Special," and "Specific". Specific quality grade applies only to devices developed based on a customer designated quality assurance program for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of EM Devices products are considered as Standard, unless otherwise specified in EM Devices Data Sheets or Data Books. If customers intend to use EM Devices products for applications that are not specified at Standard quality grade, they should contact an EM Devices sales representative in advance.

(Note)

- (1) "EM Devices" as used in this statement means EM Devices Corporation and also includes its majority owned subsidiaries.
- (2) "EM Devices electronic component products" means any electronic component product developed or manufactured by or for EM Devices (as defined above).



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.