


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to Max Freq. w. factory stored Hi-Point data.
4. No Marker  $\leq 4$ " Length

ConductRF(Wk/Yr)  
FMA28-PFPR-XXX

Marker Example

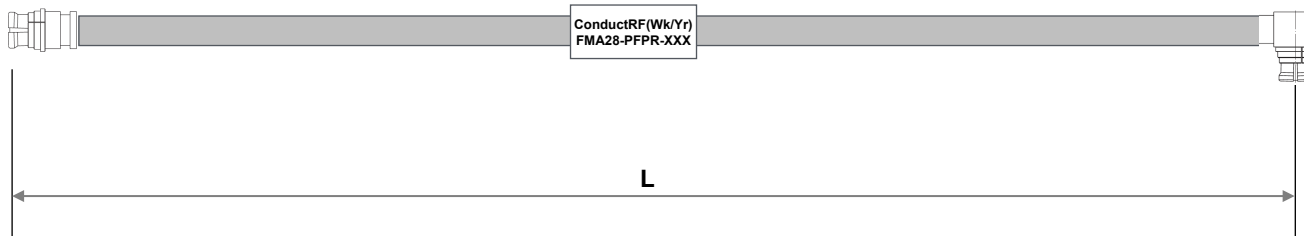


Length	XXX	Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
3"	S03	0.35	0.50	0.61
6"	S06	0.51	0.74	0.92
8"	S08	0.62	0.90	1.12
12"	S12	0.84	1.22	1.52
16"	S16	1.06	1.54	1.92
18"	S18	1.17	1.70	2.13
24"	S24	1.50	2.18	2.73
VSWR(Max)		1.50:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

4	Shrink Tube	Marker	White
3	Hand Form .086"	A28CF	Tinned
2	SMP R/A Female	PPF25A-A28G01	Gold
1	SMP Female	PPF12C-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: <b>Hand Form 0.086" SMP Female to SMP R/A Female</b>				
3	Updated BOM		DG	10/13/20	Remarks: 035/035/5	Originated: 09/23/20	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: FMA		Sheet 1 of 1
2	Updated SMP to 18GHz 12B		DG	10/08/20				Dwg Ref: FMA28-PFPR		
1	Pre-Release		DG	09/23/20	Length Tolerances: $\leq 24"$ = $\pm 0.25"$ $>24"$ = $\pm 1\%$	Checked: JW	Approved: PL	Rev: <b>3</b>		Part No: <b>FMA28-PFPR-XXX</b>
REVISION HISTORY										