SIEMENS

Data sheet

3RA2115-0BD15-1BB4

	Fuseless motor starter Direct start 600VAC Size S00 0.14-0.2a 24V DC screw			
	connection For snapping onto 60 mm busbar systems Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (MSP) 1NO (contactor)			
product brand name	SIRIUS			
product designation	non-fused motor starter 3RA2			
design of the product	direct starter			
manufacturer's article number				
of the supplied contactor	<u>3RT2015-1BB41</u>			
of the supplied circuit-breakers	3RV2011-0BA15			
 of the supplied busbar adapter 	8US1251-5DS10			
of the supplied link module	<u>3RA1921-1DA00</u>			
General technical data	<u>3141321-10400</u>			
size of the circuit-breaker	\$00			
size of load feeder	S00			
	Yes			
product extension auxiliary switch				
insulation voltage with degree of pollution 3 at AC rated value	690 V			
degree of pollution	3			
surge voltage resistance rated value	6 kV			
shock resistance according to IEC 60068-2-27	6g / 11 ms			
mechanical service life (operating cycles) of contactor typical	30 000 000			
type of assignment	2			
Ambient conditions				
ambient temperature				
during operation	-20 +60 °C			
during storage	-50 +80 °C			
during transport	-55 +80 °C			
Main circuit				
number of poles for main current circuit	3			
number of poles for main current circuit design of the switching contact	3 electromechanical			
-				
design of the switching contact adjustable current response value current of the current-	electromechanical			
design of the switching contact adjustable current response value current of the current- dependent overload release	electromechanical			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage	electromechanical 0.14 0.2 A			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value	electromechanical 0.14 0.2 A 690 V			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum	electromechanical 0.14 0.2 A 690 V 690 V			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operational current at AC-3 at 400 V rated value operating power at AC-3	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 500 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 500 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating nower at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value • at dout control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W 1 2			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions trip class	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 60 W 90 W 24 V 4 W 1 2 CLASS 10			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions trip class design of the overload release	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W 1 2 CLASS 10 thermal (bimetallic)			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value holding power of magnet coil at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts Protective and monitoring functions trip class design of the overload release <	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W 1 2 CLASS 10			
design of the switching contact adjustable current response value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating power at AC-3 at 400 V rated value operating power at AC-3 • at 400 V rated value • at 690 V rated value Control circuit/ Control control supply voltage at DC • rated value holding power of magnet coil at DC Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Protective and monitoring functions trip class design of the overload release	electromechanical 0.14 0.2 A 690 V 690 V 50 60 Hz 0.2 A 60 W 60 W 90 W 24 V 4 W 1 2 CLASS 10 thermal (bimetallic)			

design of the short-circuit trip		magnetic			
conditional short-circuit current (Iq)					
 at 690 V according to IEC 60947-4-1 	rated value	100 000 A			
 at 400 V according to IEC 60947-4-1 	rated value	153 000 A			
• at 500 V according to IEC 60947-4-1	rated value	100 000 A			
Installation/ mounting/ dimensions					
mounting position		vertical			
fastening method		for snapping onto 60 mm busbar systems			
height		200 mm			
width		45 mm			
depth		155.1 mm			
required spacing					
 for grounded parts 					
— forwards		0 mm			
— backwards		0 mm			
— upwards		20 mm			
— at the side		9 mm			
— downwards		10 mm			
 for live parts 					
— forwards		0 mm			
— backwards		0 mm			
— upwards		20 mm			
— downwards		10 mm			
— at the side		9 mm			
Connections/ Terminals					
type of electrical connection for main currer	it circuit	screw-type terminals			
type of connectable conductor cross-section stranded	ns for main contacts	0.5 4 mm², 2x (0.75 2.5 mm²)			
connectable conductor cross-section for ma stranded with core end processing	in contacts finely	0.5 2.5 mm²			
Safety related data					
B10 value with high demand rate according to SN 31920		1 000 000			
proportion of dangerous failures with high demand rate according to SN 31920		73 %			
protection class IP on the front accordin	g to IEC 60529	IP20			
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front			
Certificates/ approvals					
General Product Approval		For use in hazard- ous locations	Declaration of Confo	rmity	
Confirmation			UK	~ ~	
শ	EHL	(<u>x</u> 3)	Γĥ	CE EG-Konf.	
UL UL		ATEX		EG-KONT.	
Test Certificates	Marine / Shipp	ing			
<u>Type Test Certific-</u> <u>Special Test Cert</u> <u>ates/Test Report</u> <u>ate</u>	ific-		Lloyd's	(And a start of the start of th	
	. 20		Régister		
	ABS	BUREAU	LRS	PRS	
		VERITAS			
Marine / Shipping		other	Railway	Dangerous Good	
	A PROPERTY OF	Confirmation	Vibration and Shock	Transport Information	
RINA RMRS	DAVOLICIAL				

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-0BD15-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-0BD15-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0BD15-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb =3RA2115-0BD15-1BB4&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-0BD15-1BB4/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-0BD15-1BB4&objecttype=14&gridview=view1

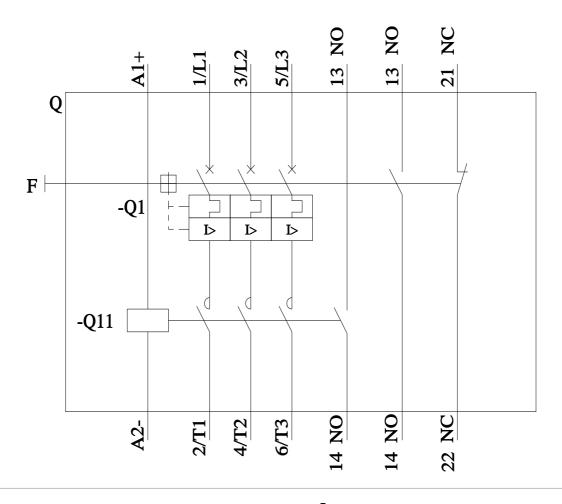

last modified:

12/15/2020 🖸