


100-125V 16A Single-Phase Hot-Swap PDU with Manual Bypass - 6 NEMA 5-20R Outlets, 2 5-20P Inputs, 1U Rack/Wall

MODEL NUMBER: PDUB201U

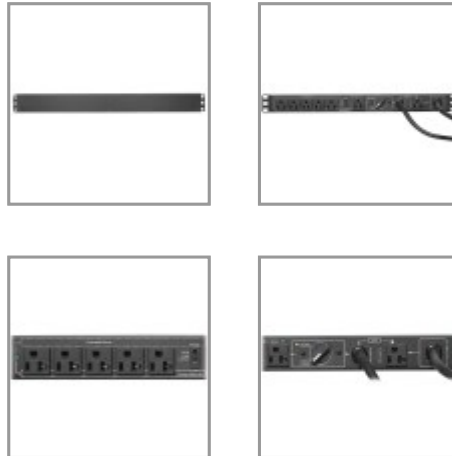

Bypass PDU maintains continuous power to connected equipment during scheduled UPS maintenance or replacement.

Features

Bypass PDU Recommended for Maintaining Continuous Power During UPS Maintenance

Keeping mission-critical data center equipment operating at its optimal level often means scheduled maintenance. But what if you are unable to afford the costly downtime involved in powering down for regular upkeep? This 120V 20A single-phase hot-swap PDU works in conjunction with your UPS system to keep everything running 24/7/365. It allows you to manually transfer connected equipment to utility power via the PDU's bypass switch, permitting maintenance or equipment replacement with no interruption of performance.

Features Dual Inputs and a Manual Transfer Switch for Uninterrupted Operation

The PDUB201U includes separate UPS and utility input cables with NEMA 5-20P plugs. The manual transfer switch allows PDU output power to flow from either input. Flip the switch to Bypass to replace the UPS and flip back to Normal once the maintenance or UPS replacement is complete. Equipment connected to the six NEMA 5-20R outlets will continue to operate without interruption.

Optional ECO Switching Feature Enables Cost-Cutting Power Savings

By enabling the ECO power saving feature, you can power off a single bank of five controlled 5-20R outlets all at once when the device connected to the master 5-20R outlet is powered off or goes into a low-power consumption mode.

Mounts into 1U of Rack Space or Wall

Use the included mounting hardware to install the PDUB201U's all-metal housing into 1U of space in an EIA-standard 19-inch rack. You may also use the mounting brackets to secure the PDU to a wall.

Specifications

Highlights

- Ideal for supporting critical IT equipment that require 24/7/365 uptime
- Transfers connected components to utility power with no downtime during UPS maintenance
- Dual UPS and utility input cables with NEMA 5-20P plugs deliver AC power
- ECO mode saves power by shutting down controlled outlet bank in certain conditions
- Mounts into 1U of rack space or onto wall using included mounting hardware

Applications

- Set the bypass switch to UPS during normal operation, so connected equipment can receive fulltime conditioned power
- Set the bypass switch to Utility to bypass the UPS and provide connected equipment with unfiltered power during UPS maintenance or replacement
- Enable ECO Switching to save power by shutting down one load bank when the device connected to the master outlet is powered off or in low-consumption mode

Package Includes

- PDUB201U 100-125V 20A Single-Phase Hot-Swap PDU
- Mounting hardware
- Owner's manual

OVERVIEW

UPC Code

037332256201



PDU Type	Hot-Swap
INPUT	
PDU Input Voltage	100; 120; 125
Recommended Electrical Service	Works with most 2000 & 2200VA 100-125V UPS systems
Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	(2) NEMA 5-20P
Input Phase	Single-Phase
Input Cord Details	Utility input cable (10 ft / 3m) / UPS input cable (4 ft / 1.2m)
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	2kW (125V), 1.92kW (120V), 1.6kW (100V) / 20A total capacity (Agency de-rated to 16A); 16A max per 5-15/20R outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	Set of 6 output receptacles are arranged in two groups to support the optional ECO Power-Saving feature; One MASTER-outlet provides optional current-sense capability that when enabled, automatically powers off the bank of 5 CONTROLLABLE GROUP-outlets when the device connected to the MASTER-outlet is powered off or enters a low power sleep mode consuming 20W or less ($\pm 5W$)
Output Receptacles	(6) 5-20R
Output Nominal Voltage	100-125V
USER INTERFACE, ALERTS & CONTROLS	
Front Panel LEDs	Front panel LEDs report UTILITY Input Power ON (green), BYPASS-MODE Switch Setting (yellow), MASTER Outlet Power ON (green), CONTROLLABLE GROUP Outlets Power ON (green)
Switches	2 position Manual Transfer switch offers Break-Before-Make transfer between UPS and Utility operating modes with less than 8 milliseconds (typical) transfer time; Additional switch offers ENABLE/DISABLE control of the ECO Power-Saving feature
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Form Factors Supported	Includes installation accessories for wall mount and 1U horizontal rackmount installation in 2 or 4 post equipment racks
PDU Form Factor	Horizontal (1U)
Shipping Dimensions (hwd / in.)	5.20 x 8.00 x 21.20
Shipping Weight (kg)	3.40



Unit Dimensions (hwd / in.)	1.73 x 17.24 x 3.94
Unit Dimensions (hwd / cm)	4.39 x 43.79 x 10.01
Unit Weight (lbs.)	5.2
Unit Weight (kg)	2.36
ENVIRONMENTAL	
Operating Temperature Range	0C ~ 40C (32F ~ 104F)
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)
Relative Humidity	5-95% non condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
FEATURES & SPECIFICATIONS	
High Availability PDU Features	Manual Hot-Swap Bypass
STANDARDS & COMPLIANCE	
Certifications	Tested to UL62368-1 (USA), CAN/CSA-C22.2 No. 62368-1 (CANADA); NOM (MEXICO)
Certification Details	Series Number(s) AG-0515
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>