




AEC-Q200

This component was always RoHS compliant from the first date of manufacture.

# RF1404C

## 433.92 MHz SAW Filter



**SM5050-8 Case**  
**5 x 5**

- *Front-End Filter for European Wireless Receivers*
- *Low-Loss, Coupled-Resonator Quartz Design*
- *Simple External Impedance Matching*
- *Complies with Directive 2002/95/EC (RoHS)*
- *Tape and Reel Standard per ANSI/EIA-481*



The RF1404C is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFMi's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25 °C      Absolute Frequency	$f_C$			433.920		MHz
Minimum Insertion Loss, 433.800 - 434.120 MHz	$IL_{min}$			2.4	4.0	dB
Passband (relative to $IL_{min}$ )		433.740 - 434.010 MHz			3.0	dB
		433.680 - 434.160 MHz			6.0	
Passband (relative to $IL_{min}$ )	$BW_3$		650	700		kHz
Attenuation: (relative to $IL_{min}$ )		10 - 414 MHz	45	48		dB
		414 - 427.5 MHz	40	43		
		427.5 - 432.92 MHz	15	19		
		434.92 - 442 MHz	10	14		
		442 - 550 MHz	35	38		
		550 - 1000 MHz	45	50		
Impedance at $f_C$ : $Z_{IN} = R_{IN} \parallel C_{IN}$				227 $\Omega$    3.3 pF		
$Z_{OUT} = R_{OUT} \parallel C_{OUT}$				227 $\Omega$    3.3 pF		
Turnover To				25		°C
Frequency Aging      Absolute Value During the First Year				≤10 ppm/yr Typical		
Lid Symbolization (in addition to Lot and/or Date Codes)				499, YWWS		
Standard Reel Quantity	Reel Size 7 Inch			500 Pieces/Reel		
	Reel Size 13 Inch			3000 Pieces/Reel		




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

**NOTES:**

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.

### Typical Filter Response


Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout.

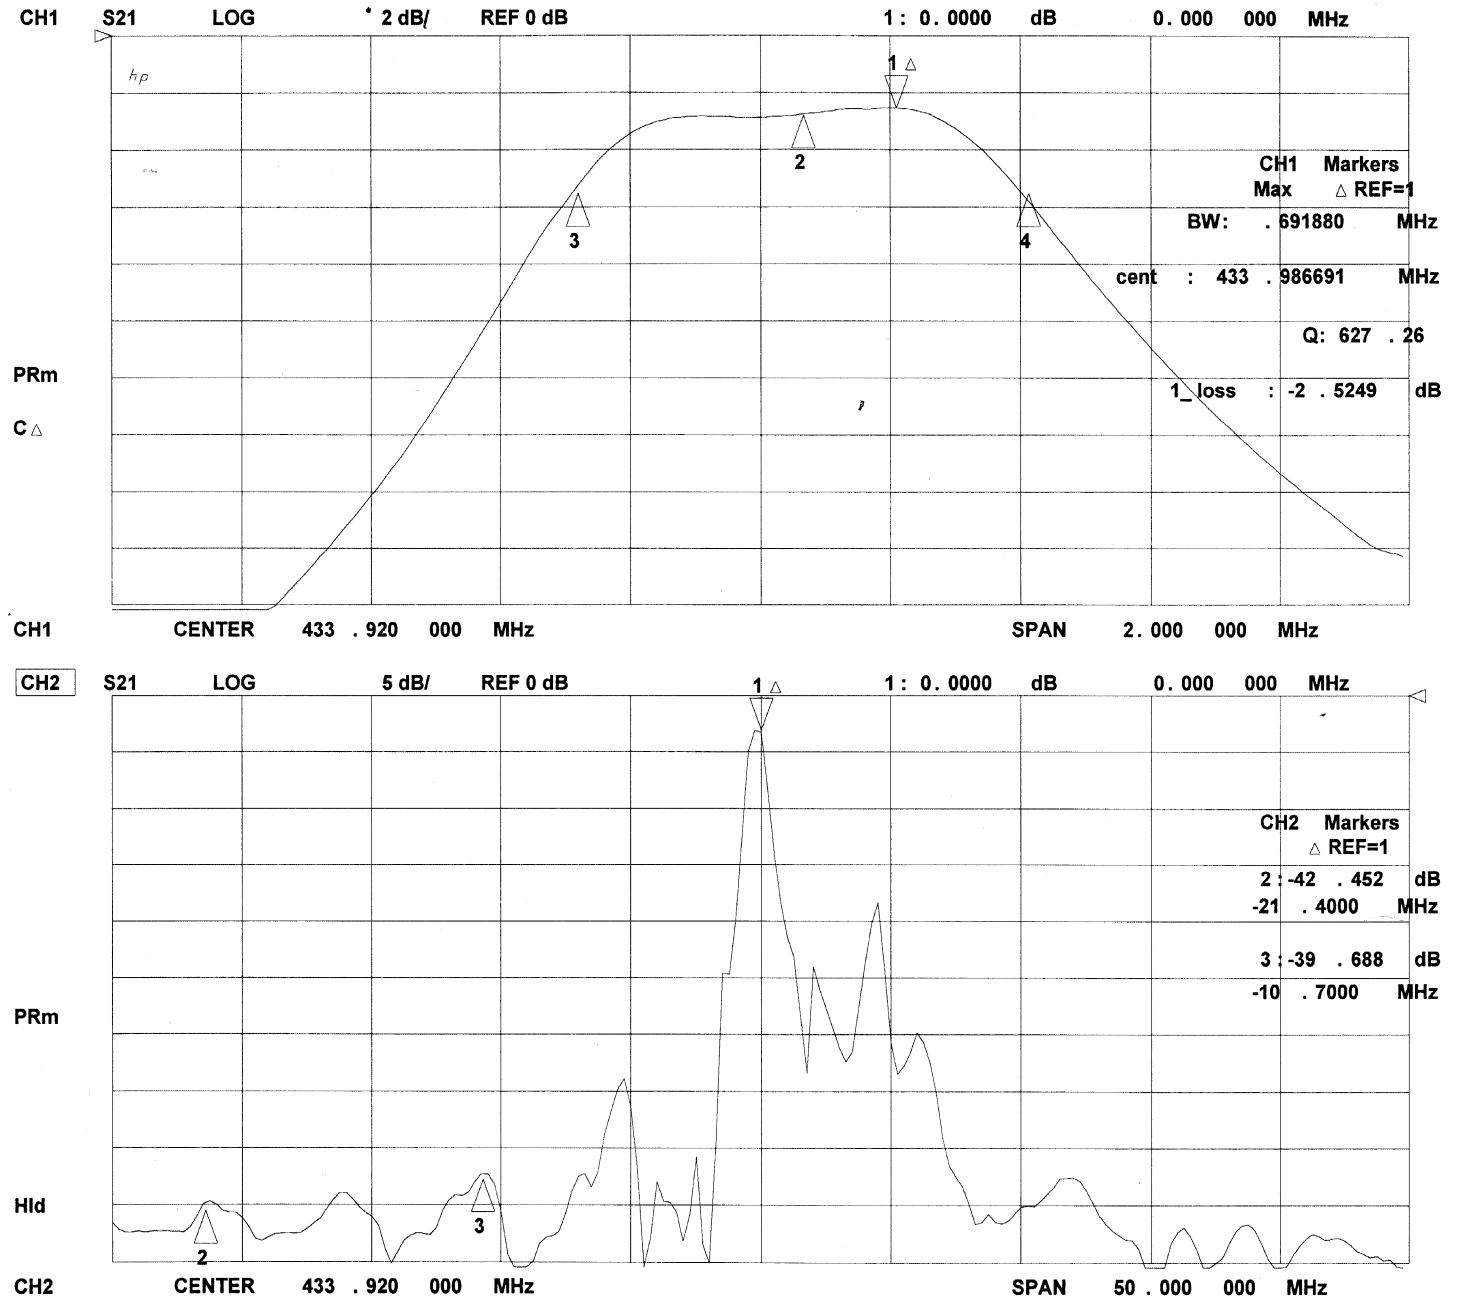

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +120	°C
Operating Temperature	-40 to +105	°C
Soldering Temperature, 10 seconds/5 cycles maximum	260	°C

### Electrical Connections


Pin	Connection
1	Input Ground
2	Input
3	to be Grounded
4	Case Ground
5	Output
6	Output Ground
7	to be Grounded
8	Case Ground

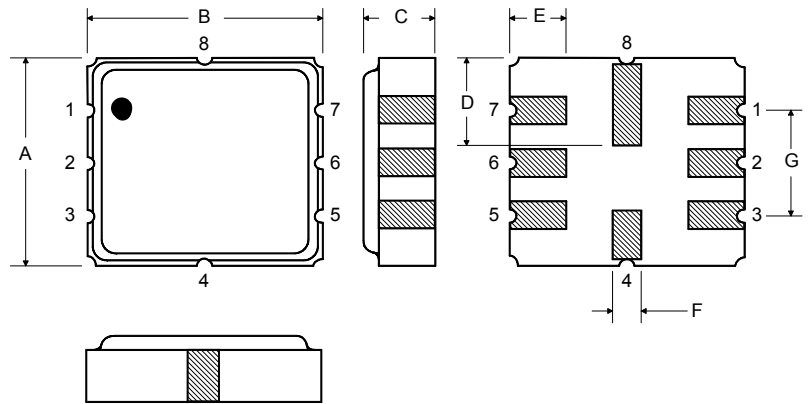


### Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.8	5.0	5.2	0.189	0.197	0.205
B	4.8	5.0	5.2	0.189	0.197	0.205
C			1.7			0.067
D		2.08			0.082	
E		1.17			0.046	
F		0.64			0.025	
G	2.39	2.54	2.69	0.094	0.100	0.106

### Matching Circuit to 50Ω

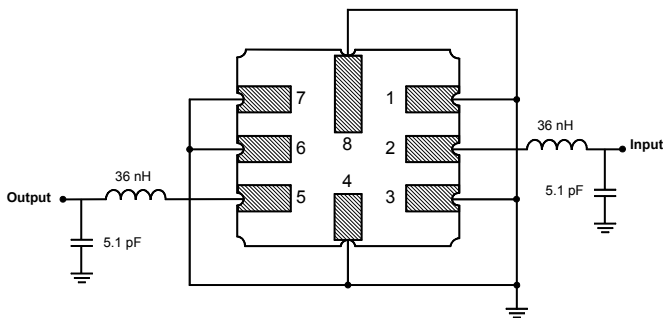

### Alternate Matching Circuit to 50Ω

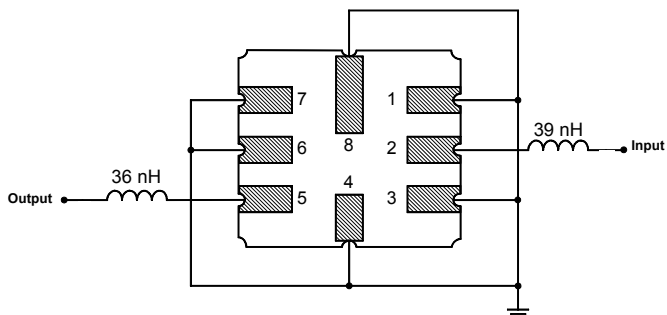

## Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

