

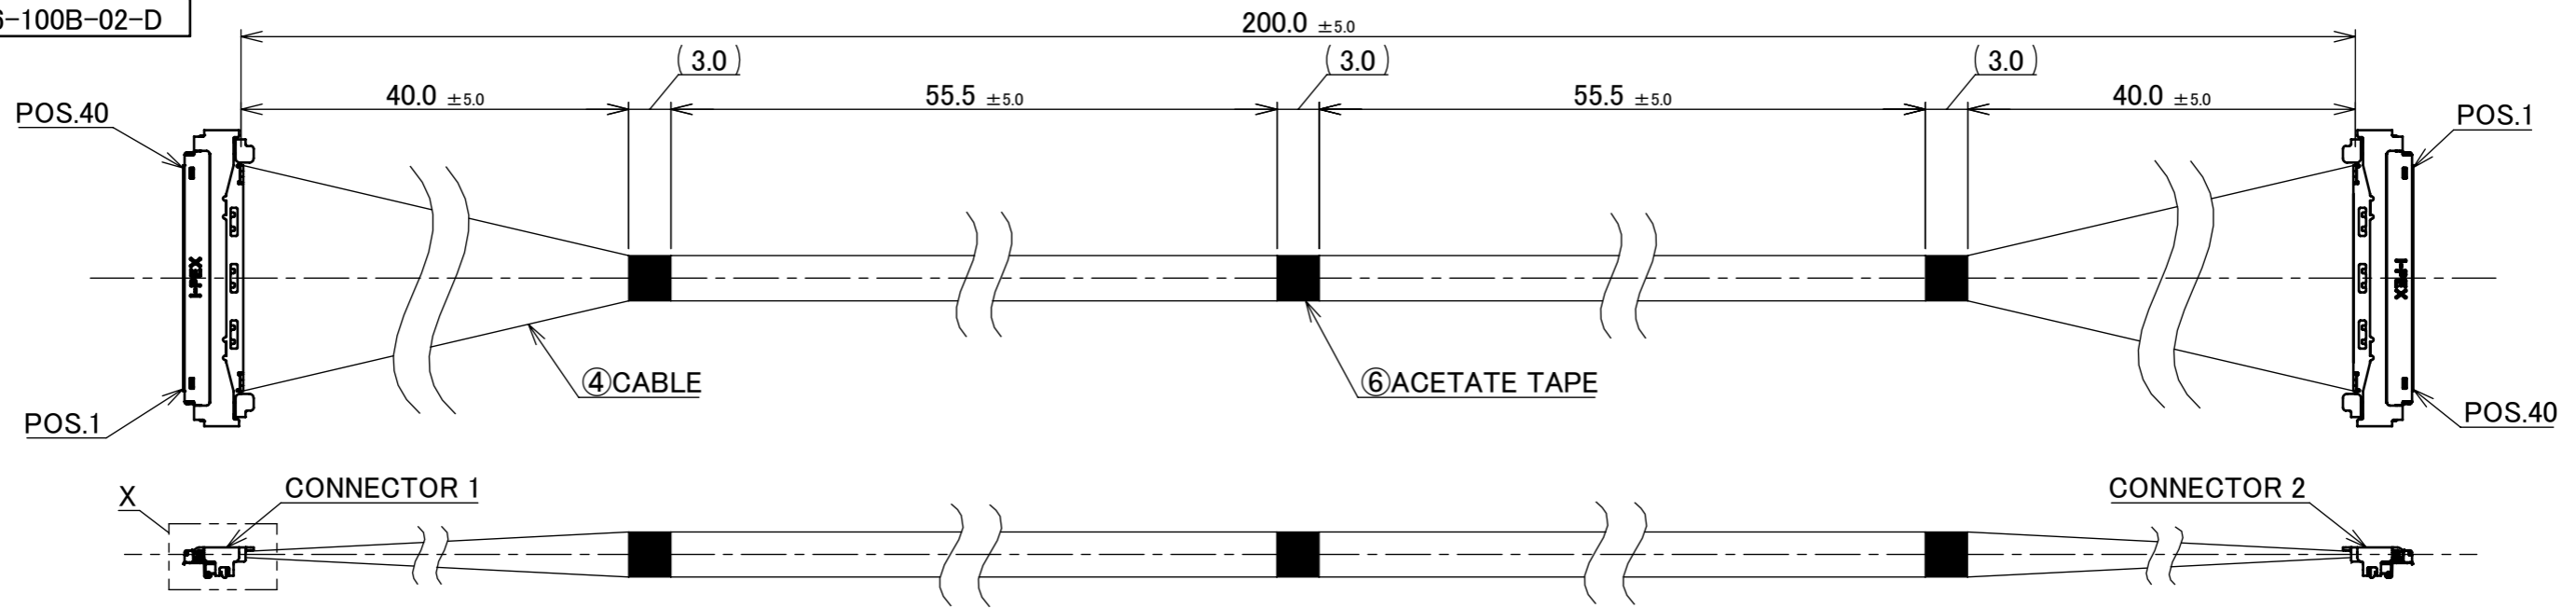


PART No.  
81466-100B-02-D

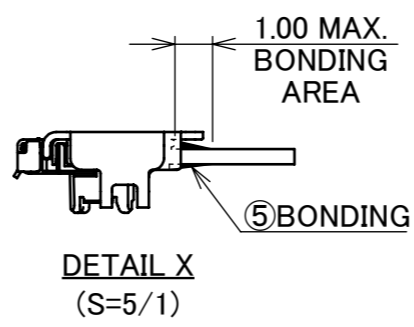

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL AWG#40 50 OHM, BLUE	1
39	MICRO-COAXIAL AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL AWG#40 50 OHM, BLUE	.
.		.
2	MICRO-COAXIAL AWG#40 50 OHM, BLUE	39
1	MICRO-COAXIAL AWG#40 50 OHM, BLUE	40

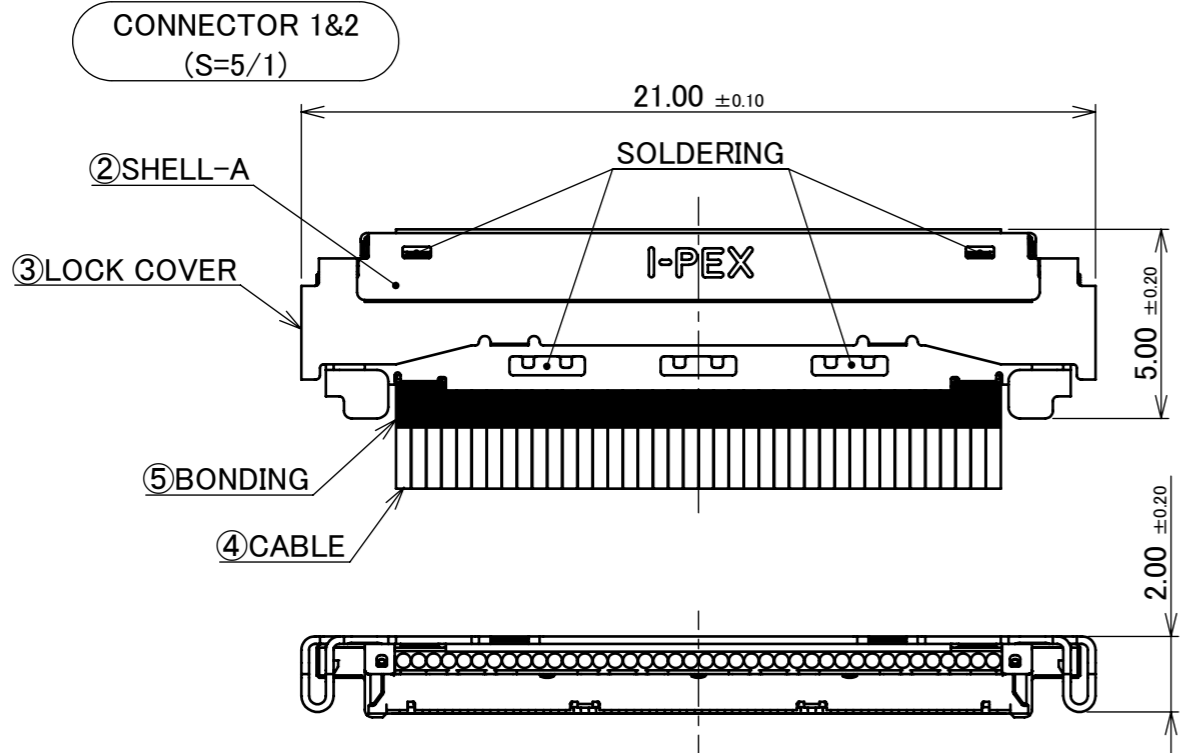


NOTE.

1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-18033.

2. ELECTRIC CHARACTERISTICS  
 WITHSTAND VOLTAGE : AC 250V(1SEC.) LEAKAGE CURRENT 2.0mA MAX.  
 INSULATION RESISTANCE : 50MΩ MIN. DC 100V (0.5SEC.)

6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	40	MICRO-COAXIAL AWG #40, 50 OHM, BLUE
3	LOCK COVER	3493-0401	2	CONNECTOR 1&2
2	SHELL-A	3488-0401	2	CABLIN <sup>®</sup> -UM PLUG P/N : 20877-040T-01 CONNECTOR TO BE MATED : 20879-040E-01
1	HOUSING ASS'Y	20878-040T-01	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS

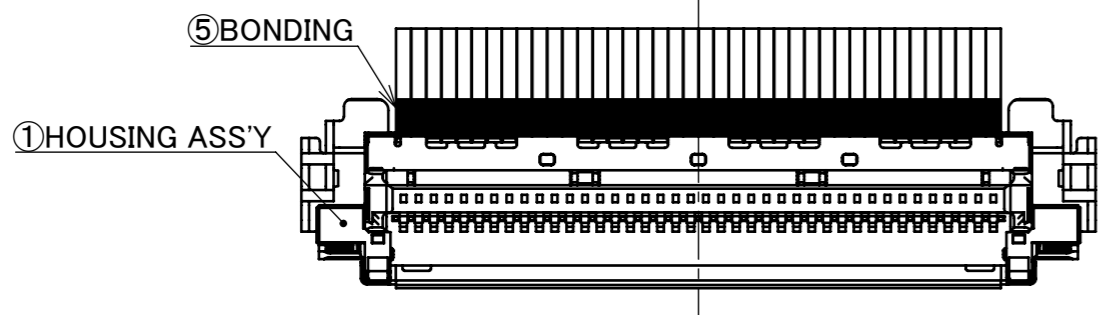

For DIGI-KEY CORPORATION										
ANGLE				±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY	
				6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	IH-210016		
GENERAL TOLERANCE.							TITLE	SCALE		
DWG.				K.Baba		DATE	2021/05/19		CABLIN <sup>®</sup> -UM 40P	
CHK.				R.Takei				HARNESS		
0	Z210510	K.B	May/19/'21					mm		
REV.	ECN	BY	DATE	APP.	DWG. No.		81466	SIZE	SHEET	
REVISION RECORD					H.Ikari		81466		A3	
									1/1	
									REV.	
									0	