

www.lemo.com

FFA.3E.707.CLAC75Z

SUMMARY

Wires

Low voltage 7
High voltage 1

Image is for illustrative purpose only

Series 3E

Termination type Male solder Hybrid High-Voltage

IP rating 68

AWG wire size 0.00 - 0.00

Cable Ø 7.10 - 7.50 mm

Status active

Matching parts ERA.3E.707.CLL

Download

Request a quote

TECHNICAL DETAILS

Mechanics

Shell Style/Model FFA*: Straight plug, cable collet and nut for fitting a bend relief

Keying Hermaphroditic keying (half moon insert) with male pin 1

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant Z: Nut for fitting a bend relief

Weight 70.41 g

Performance

Configuration 3E.707: 1 High V. 7 Low V.
Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current LV 8, HV 3 Amps

Specifications

Contact Type: Solder

Working voltage HV contact - Us (kV rms) 2.1

Test voltage LV Ue (kV rms) 1

Please use heatshrink to guarantee High Voltage performance

Others


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

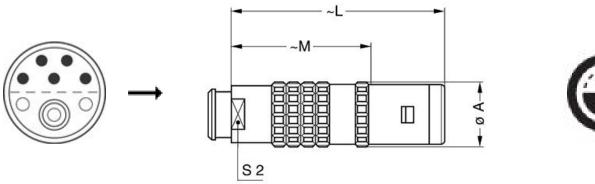



Dimensions

	A	L	М	S2
mm.	19	60	40	15
in.	0,75	2,36	1,57	0,59

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.3E.030.PA150
Caps: BFA.3E.100.NAS

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

