Midi / EvoSIGNAL Midi TwinLIGHT Combi 12/24VAC/DC YE



ļ

Part No.: Series:	461.310.70 EvoSIGNAL	
	ICAL DATA	120
Height		130 mm
Diameter		85 mm
Materials		PC PC/ABS
Dome colour		Yellow
Housing colour		Grey
Protection category		IP66
Connection		Push-in terminal
cross-sectional area minimum		0,25mm² / 24AWG
cross-sectional area maximum		1,50mm² / 16AWG
Type of fixing		Adapter required
Working temperature minimum		-30°C
Working temperature maximum		+60°C
Weight with packaging		218 g
Product weight		182 g
ELECTRICAL DATA		
Operating voltage		12V 24V
Operating voltage type		AC/DC
Operating voltage type		50Hz
Operating voltage frequency		+/- 10%
Operating voltage tolerance		12 VDC
Rated operational voltage		290 mA
Rated operational current		2,5A
Rated inrush current Protection class		Protection class 2
		3
Pollution degree		5
Overvoltage category		111
OPTICAL	DATA	
Light source		LED
Light colour		Yellow
Optical signal image		Blink Permanent TwinLight
Blink frequency		1 Hz
Service life optical		50,000 h minimum
Pulse- & pause Duration [ms]		466ON, 557OFF
ACOUSTI		

ACOUSTIC DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ


Midi / EvoSIGNAL Midi TwinLIGHT Combi 12/24VAC/DC YE

Volume (max) at 1m distance	110,0 dB (A)
Acoustic signal image	Multi-tone
Number of tones	10 tone
Audio frequency	3300 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	272
., 1	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i



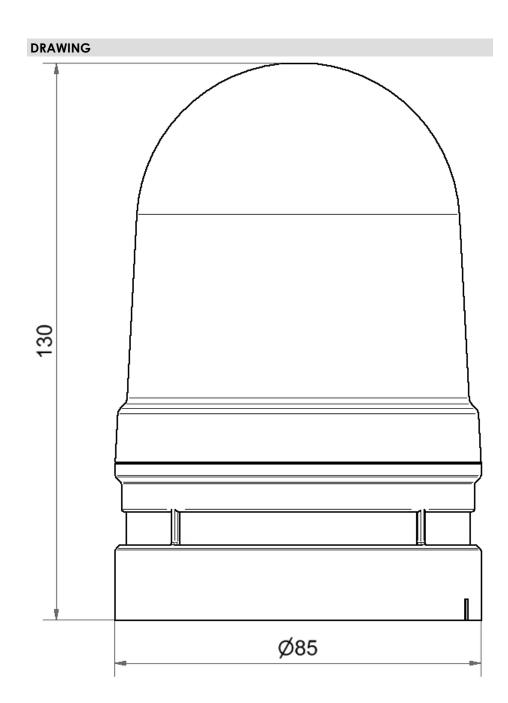

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.