## SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A



			17 4 4 2
Product designation Product type designation			Soft starter ADXL
Motor type			Asynchronous three phase
Electrical features			an ee pridee
Supplies voltage			
	Type of system		Three phase
	Rated supply voltage	V	208600 VAC ±10%
	auxiliary supply voltage (Us)		100240VAC ±10%
	Rated frequency	Hz	50/60
Rated starter current le		Α	85
Rated motor power			
IEC ratings (T≤40°C)			
	230VAC	kW	22
	400VAC	kW	45
- T. (T. (2000)	500VAC	KW	55
UL ratings (T≤40°C)	000 040/440		0.0
	220-240VAC	hp	30
	380-415VAC	hp	50
	440-480VAC 550-600VAC	hp hp	60 75
Number of controlled phases	550-600 VAC	hp N°	2
Built-in bypass		IN	Yes
			Natural or forced
Cooling System			(optional)
Rated insulation voltage Ui		V	600
Programming interface			
Display			Backlit icon LCD display
Programming with NFC technology			Yes
Optical port			Yes
Startup and stop settings			
Startup method			Torque ramp with current limit, Voltage ramp with current limit, Constant torque with current limit
Stop method			Torque ramp, voltage ramp, free-wheel stop
Protections			N/ II
Auxiliary supply protection			Voltage too low





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

Power supply protection			No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
Motor protection			Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long Overcurrent, overtemperature,
Starter protection			bypass failure, phase shorted, temperature sensor fault, cooling fan fault, maintenance request
Input and Output			
Digital inputs	Number of digital input	n°	3 2 input with dry contact + 1 input
	Digital input type  Digital input functions		with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status
			thermal status reset, keyboard lock, motor selection, user alarm, command)
Digital outputs	Number of digital output	n°	3






SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

		Digital output arrangement  Digital output functions		2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF)
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
				+60°C (with
		max	°C	current derating >40°C of 0.5%/ °C)
	Storage temperature			
	and the second of the second o	min	°C	-30
		max	°C	+80
Max altitude			m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity			%	<80%
Pollution degree				2
Installation category				III
Housing				
Mounting				Screw-fixing or 35mm DIN rail with optional accessory EXP8003
IP degree of protection	n			IP00
Dimensions (W x H x I	D)		mm	95 x 226 x 182
Weight			Kg	2.9
Dimensions				

**ENERGY AND AUTOMATION** 

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 85A

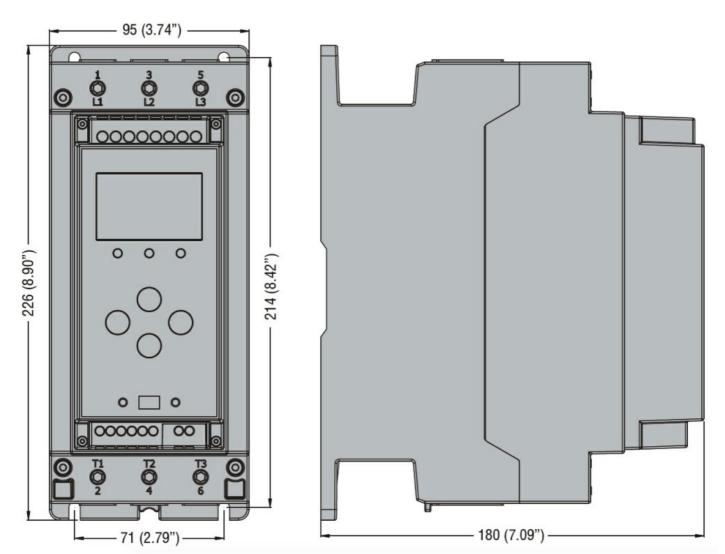

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508

Certificates

cULus

EAC

**RCM**