




Made in the United States of America


MODE 1



MODE 2



MODE 3

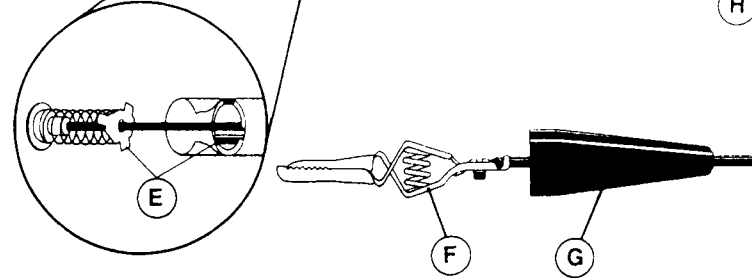

**MODE 1:** Continuity tester for unpowered circuits. 0-10 ohms; uses the Menda [35121](#) lamp and two AAA batteries (not supplied).

**MODE 2:** Voltage tester for 60-600 volts AC or DC; uses the neon cartridge and no batteries.

**MODE 3:** Voltage tester for 0-60 volts AC or DC; uses the Menda [35121](#) lamp and no batteries.

- A. Probe tip (included)
- B. Menda [35121](#) (included) - For use in Modes 1 and 3. Operates from 2 to 3 volts in Mode 3.
- C. Neon Cartridge (included) - For use in Mode 2.
- D. Two AAA batteries (not included) - For use in Mode 1
- E. Three point washer rides on internal steps in handle. Slides to lower position for Mode 1; upper position for Modes 2 and 3.
- F. The other end of the 3 ft wire lead is terminated with a #85 Mueller ground clip.
- G. Black insulator over clip for high voltage applications.
- H. Wire is 0.1" high flex 105 strand copper with black PVC insulated jacket; 3' length
- I. Clear butyrate window provides a 360° view of the indicator light

Specifications and procedures subject to change without notice.

**CIRCUITRACER® CONTINUITY AND VOLTAGE TESTER**

**MENDA**

3651 WALNUT AVENUE, CHINO, CA 91710  
PHONE: (909) 627-2453 FAX: (909) 627-7449  
WEBSITE: [MendaPump.com](http://MendaPump.com)

**DRAWING NUMBER**  
35100

**DATE**  
October 2017