


## Data sheet | Item number: 267-510

Male connector with connect. for ground; without ground contact; 7-pole;  
2,50 mm<sup>2</sup>; white

[www.wago.com/267-510](http://www.wago.com/267-510)

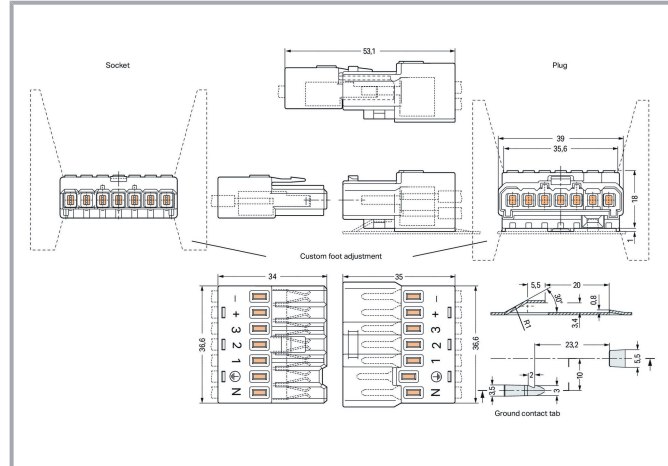

### Data

#### Electrical data

#### Ratings per IEC/EN

|                               |   |
|-------------------------------|---|
| Ratings per                   | IEC/EN 61984  |
| Rated voltage (III/2)         | 500 V   |
| Rated impulse voltage (III/2) | 4 kV  |
| Rated current                 | 16 A  |
| Legend (ratings)              | (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2 |

#### Connection data

|                            |   |
|----------------------------|---|
| Number of connection types | 1 |
|----------------------------|---|

#### Connection 1

|                       |                                     |
|-----------------------|-------------------------------------|
| Connection technology | PUSH WIRE <sup>®</sup>              |
| Strip length          | 11 ... 12 mm / 0.43 ... 0.47 inches |
| Pole number           | 7                                   |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Physical data

|                         |                      |
|-------------------------|----------------------|
| Width                   | 35 mm / 1.378 inches |
| Height from the surface | 18 mm / 0.709 inches |
| Depth                   | 39 mm / 1.535 inches |

## Material Data

Note (material data)

Information on material specifications can be found here

|                             |  |
|-----------------------------|--|
| Color                       | white                                  |
| Material group              | I                                      |
| Insulation material         | Polyamide (PA66)                       |
| Flammability class per UL94 | V0                                     |
| Clamping spring material    | Chrome-nickel spring steel (CrNi)      |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> ) |
| Contact plating             | Tin                                    |
| Fire load                   | 0.293 MJ                               |
| Weight                      | 19.4 g                                 |

## Environmental requirements

|                       |        |
|-----------------------|--------|
| Temperature stability | 105 °C |
|-----------------------|--------|

## Commercial data

|                       |                                |
|-----------------------|--------------------------------|
| Product Group         | 8 (Misc. Chassis Mount Blocks) |
| eCl@ss 10.0           | 27-44-03-14                    |
| eCl@ss 9.0            | 27-44-03-14                    |
| ETIM 8.0              | EC000458                       |
| ETIM 7.0              | EC000458                       |
| PU (SPU)              | 50 pcs                         |
| Packaging type        | box                            |
| Country of origin     | PL                             |
| GTIN                  | 4044918546706                  |
| Customs tariff number | 85366990990                    |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.




## Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

## Approvals / Certificates

### General approvals

| Logo  | Approval                                     | Additional Approval Text | Certificate name |
|---|--|--------------------------|------------------|
|   | CCA<br>DEKRA Certification B.V.              | EN 61984                 | 2156138.01       |
|   | CCA<br>DEKRA Certification B.V.              | IEC 61984                | NL-47713         |
|   | UL<br>UL International Germany GmbH          | UL 1977                  | E45171           |
|  | VDE<br>VDE Prüf- und Zertifizierungsinstitut | EN 61984                 | 40032309         |

## Downloads

### Documentation

#### Additional Information

|                        |            |        |          |
|------------------------|------------|--------|----------|
| Technical Section      | 2019 Apr 3 | pdf    | Download |
| Technical explanations |            | 2.0 MB |          |

## CAD/CAE-Data

### CAD data

|                      |     |          |
|----------------------|-----|----------|
| 2D/3D Models 267-510 | URL | Download |
|----------------------|-----|----------|

### CAE data

|                           |     |          |
|---------------------------|-----|----------|
| EPLAN Data Portal 267-510 | URL | Download |
|---------------------------|-----|----------|

Subject to changes. Please also observe the further product documentation!



ZUKEN Portal 267-510

[URL](#)

[Download](#)

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 267-510

[URL](#)

[Download](#)

Male connector with connect. for ground; without ground contact; 7-pole; 2,50 mm<sup>2</sup>;  
white

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.