

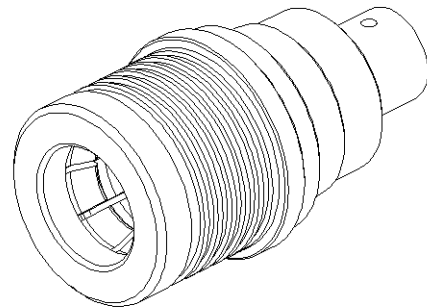
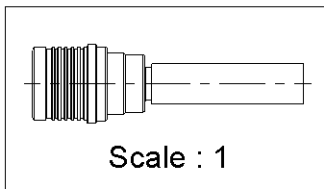


PAGE 1/4	ISSUE 15-05-15C	SERIES WQMA	PART NUMBER R123W055000
----------	-----------------	-------------	-------------------------

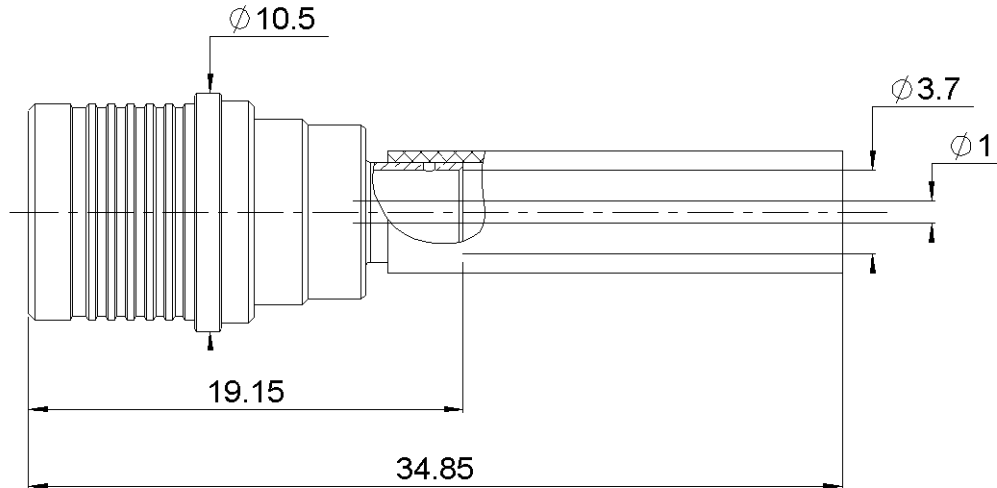

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING ( $\mu\text{m}$ )
Body	<b>BRASS</b>	<b>BBR BRASABLE</b>
Center contact	<b>BRASS</b>	<b>NPGR</b>
Outer contact	<b>BRONZE</b>	<b>BBR</b>
Insulator	<b>PTFE</b>	
Gasket	<b>SILICONE RUBBER</b>	
Others parts	<b>BRASS</b>	<b>BBR</b>
-	-	-
-	-	-

PAGE <b>2/4</b>	ISSUE <b>15-05-15C</b>	SERIES <b>WQMA</b>	PART NUMBER <b>R123W055000</b>
-----------------	------------------------	--------------------	--------------------------------

### PACKAGING

Standard	Unit	Other
<b>100</b>	<b>Contact us</b>	<b>Contact us</b>

### ELECTRICAL CHARACTERISTICS

Impedance	<b>50</b>	Ω
Frequency	<b>0-6</b>	GHz
VSWR	<b>1.02 + 0.0200</b>	x F(GHz) Maxi
Insertion loss	<b>0.05</b>	√F(GHz) dB Maxi
RF leakage	- ( <b>***80</b> )	- F(GHz)) dB Maxi
Voltage rating	<b>335</b>	Veff Maxi
Dielectric withstanding voltage	<b>1000</b>	Veff mini
Insulation resistance	<b>5000</b>	MΩ mini

### MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	<b>NA</b>	N mini
Axial force – Opposite end	<b>NA</b>	N mini
Torque	<b>NA</b>	N.cm mini
Recommended torque		
Mating	<b>NA</b>	N.cm
Panel nut	<b>NA</b>	N.cm
Clamp nut	<b>NA</b>	N.cm
A/F clamp nut	<b>0.0000</b>	mm
Mating life	<b>100</b>	Cycles mini
Weight	<b>5.0700</b>	g

### ENVIRONMENTAL

Operating temperature	<b>-40/+105</b>	°C
Hermetic seal	<b>NA</b>	Atm.cm3/s
Panel leakage	<b>NA</b>	

### SPECIFICATION

### CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	<b>3.17</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
mm	<b>3.17</b>	<b>0</b>	<b>13*</b>	<b>0</b>	<b>0</b>	<b>0</b>

\* for jacketed cable

Assembly instruction:

Recommended cable(s)

**RG 402**  
**KS 2**

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	<b>270</b>	N mini
- torque	<b>NA</b>	N.cm

### TOOLING

Part Number	Description	Hexagon
R282053000	STRIPPING TOOL	
R282067000	POINTER GAUGE	
R282740000	SOLDERING MOUNTING	
R282744220	SOLDERING POSITIONER(CENTER CONTACT)	
R282862070	CONTROL GAUGE	

### OTHER CHARACTERISTICS


**\*Interface ingress protection: IP68(IEC60529) mated condition**

**\*\*Intermod.: -120dBc at 1.8GHz (2 x 20W)**

**\*\*\*RF leakage(interface) 3<F<6GHz:>70dB**


PAGE 3/4	ISSUE 15-05-15C	SERIES WQMA	PART NUMBER R123W055000
----------	-----------------	-------------	-------------------------

## POWER DERATING

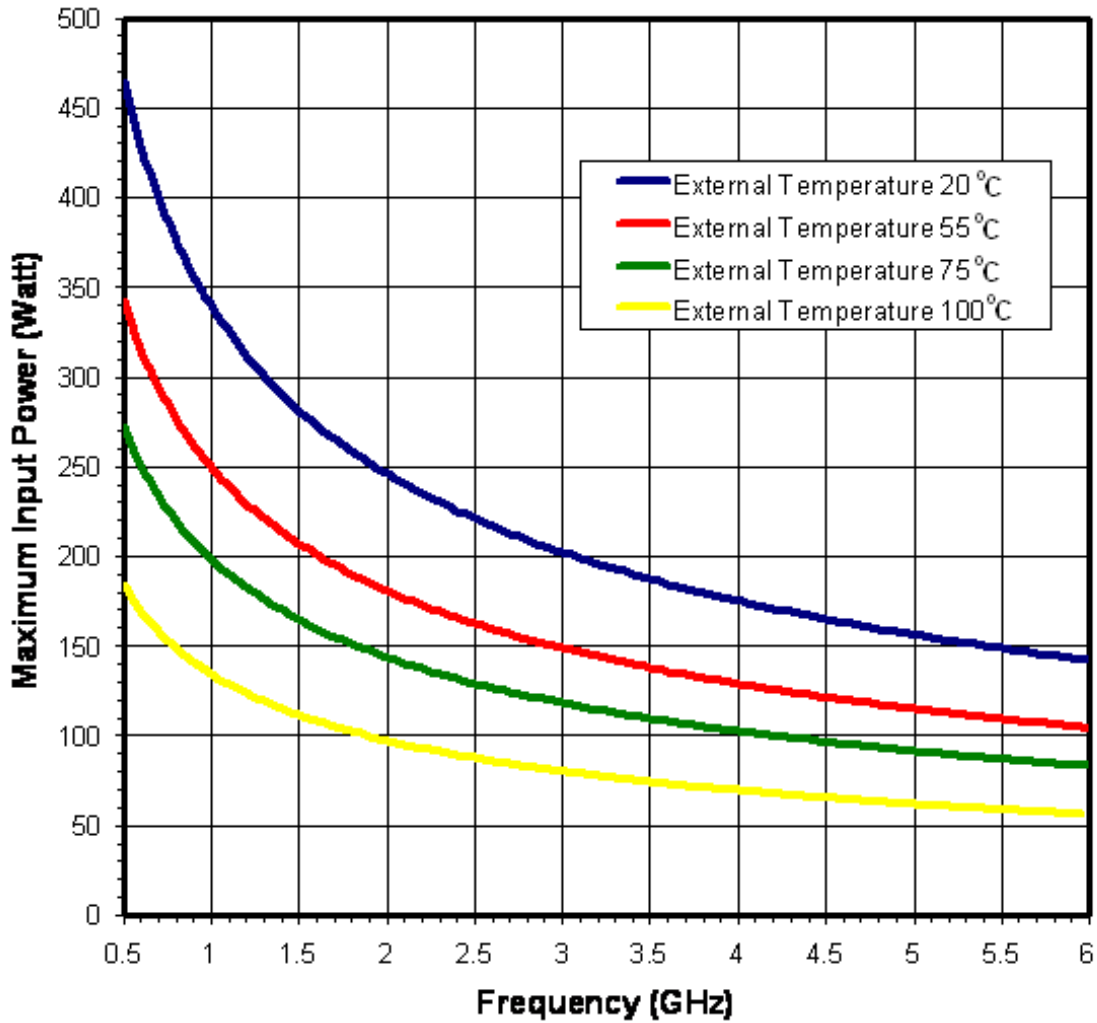


PAGE 4/4	ISSUE 15-05-15C	SERIES WQMA	PART NUMBER R123W055000
----------	-----------------	-------------	-------------------------

**COMPONENTS**

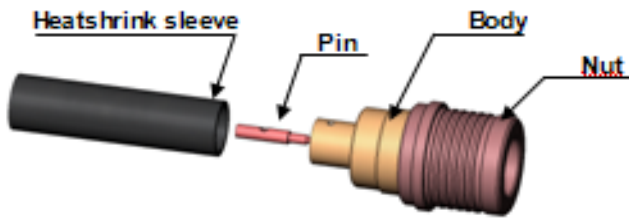

**STRIPPING DIMENSIONS**

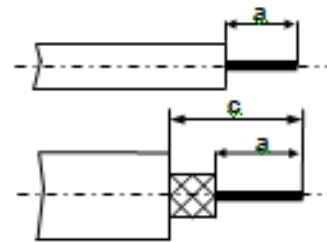

We recommend a cable thermal preconditioning before assembly

**1**

For cables with a jacket, remove this one according to the quotation C before using the recommended tool. Insert the cable into the clamp element. Present the pointer in front of the clamp element. Push the cable until it stops, while holding the clamp element pushed on the hollow part of the pointer. Turn the clamp element until the release of the pointer.

**4**

After cooling, remove the assembly from the jig. Positioning the connector onto the Assembly jig. Slide the cable into the connector until it bottoms against the insulator. Tighten. Put three rings of solder around the cable and solder. After cooling, remove the assembly from the jig.

**2**

Present the cutting element in front of the clamp element. Push and turn both elements, back part opposite to the front part. Once they reach the stop, pull without revolving.

**5**

Slide the sleeve over the body and heatshrink it in place.

**3**

Mount the positioner A. Slide the centre contact into the positioner A. Insert the solder gauge between the centre contact and the cable. Tighten. Solder the contact.

1 - Positioner A