
**Mounting Option** 


12-.128 (3.25) Dia. Side Mounting Holes

## **Contact Detail**

524-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.175(4.45)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

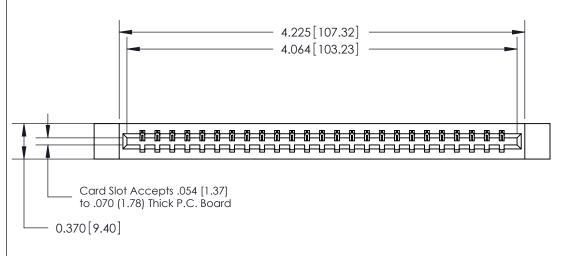

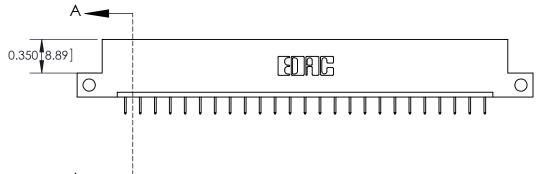

THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL

| 0.388 [9.86]<br>Card Slot    |
|------------------------------|
| .160 [4.06] Point of Contact |
|                              |
|                              |
| SECTION A-A                  |

## **See Accompanying Page for:**

- Bend Detail
- Mounting Options
- Features and Specifications

333 Series Card Edge Connector Part Number: 333-025-524-112



EDAC INC TORONTO, ONTARIC CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIE
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

| ACAD REFERENCE NO. 333 ENG MASTER |                  |  |
|-----------------------------------|------------------|--|
| DRAWN: J.LEE                      | DATE: OCT. 14/09 |  |
| CHECKED:                          | DATE:            |  |
| SCALE: NTS                        | SHEET 1 OF 4     |  |
| BBAUUNG NUUNBER                   | LOCUE            |  |

RAWING NUMBER ISSUE 333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



| 333 Series Card Edge Connector<br>Contact Bend Detail |  | ACAD REFERENCE NO. 333 ENG MASTER |                  |        |  |
|---|--|-----------------------------------|------------------|--------|--|
|   |  | DRAWN: J.LEE                      | DATE: OCT. 14/09 |        |  |
|   |  | CHECKED:                          | DATE:            |        |  |
| EDAC INC  | THESE DRAWINGS AND SPECIFICATIONS  | SCALE: NTS                        | SHEET :          | 2 OF 4 |  |
| TORONTO, ONTARIO                                      | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER                    |                  | ISSUE  |  |
| YOUR CONNECTION TO QUALITY & SERVICE                  | MANUFACTURE OR SALE OF APPARATUS   | 333 Assembly                      |                  | 1      |  |

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

ORIGINAL

1



| 333 Series Card Edge Connector<br>Mounting Options |   | ACAD REFERENCE NO. 333 ENG MASTER |             |         |           |
|--|---|-----------------------------------|-------------|---------|-----------|
|  |   | DRAWN:                            | J.LEE       | DATE: O | CT. 14/09 |
|  |   | CHECKED:                          |             | DATE:   |           |
| EDAC INC   | THESE DRAWINGS AND SPECIFICATIONS                             | SCALE:                            | NTS         | SHEET : | 3 OF 4    |
| TORONTO, ONTARIO                                   | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | DRAWING                           | NUMBER      |         | ISSUE     |
| YOUR CONNECTION TO QUALITY & SERVICE               |   | 3                                 | 33 Assembly |         | 1         |

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector                           | ACAD REFERENCE NO. 333 ENG MASTER      |
|--|--|
| Features and Specifications                              | DRAWN: J.LEE DATE: OCT. 14/09          |
| redictes and specifications                              | CHECKED: DATE:                         |
| EDAC INC THESE DRAWINGS AND ARE THE PROPERTY OF          |  |
| IORONIO, ONIARIO SHALL NOT BE REPRO                      | DDUCED, OR COPIED DRAWING NUMBER ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PER | LE OF APPARATUS 333 Accombly 1         |