


REV. 0  
DC0 142666

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX. 1.5 VDC MIN.

CUSTOMER DATA SHEET

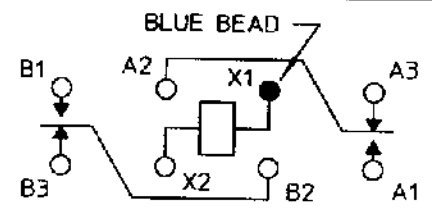

TERMINAL VIEW


ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT BOUNCE 2.0 MS MAX.

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. PBB 1/26/01 CK.TLQ 1-26-01



CUST. QPL  
CUST. NO. M39016/13-123L REV. '3SBC' RELAY

3SBC2146A2