


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to 6GHz w. factory stored Hi-Point data.
4. No Marker $\leq 4"$ Length

ConductRF(Wk/Yr)
FMA28-M2M2-XXX

Marker Example

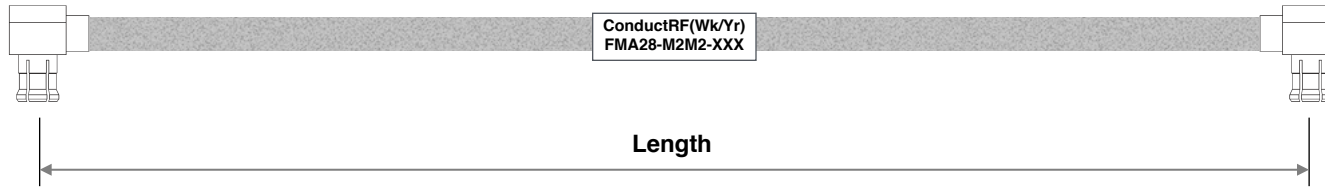

Length	XXX	Insertion Loss(dB) Typ.
		6GHz
3"	S03	0.35
6"	S06	0.51
8"	S08	0.62
12"	S12	0.84
16"	S16	1.06
18"	S18	1.17
24"	S24	1.50
VSWR(Max)		1.45:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

4	Label	Shrink Tube	White
3	Flexible Spiral Coax	A28CF	Tinned
2	MCX R/A Male	M5M21D-A28G01	Gold
1	MCX R/A Male	M5M21D-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Hand Form 0.086" MCX R/A M to MCX R/A M			
2	Updated Connectors and data		DG	09/23/20	Remarks: 035/035/5	Originated: 04/12/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: FMA	Sheet 1 of 1
1	Pre-Release		DG	04/12/16				Dwg Ref: FMA28-M2M2	
					Length Tolerances: $\leq 24"$ = $\pm 0.25"$ $> 24"$ = $\pm 1%$	Checked: JW	Approved: PL	Rev: 2	Part No: FMA28-M2M2-XXX
REVISION HISTORY									

