## KombiSIGN 40 / DesignLOOK KS40 Design BWM 24VAC/DC GN/YE/RD

Part No.: 639.301.01



i

Series:	KombiSIGN 40		
MECHAN	ICAL DATA		
Diameter			40 mm
Materials		PC	
Dome colour			Clear
Housing colour			Silver
Protection category		IP66	
			IP69K
Connection			Push-in terminc
cross-sectional area minir		mum	0,25mm² / 24AV
cross-sectional area maxi		timum	1,50mm² / 16AW
Cable entry			Through hole
Cable entry maximum			d = 9 mm
Tension relief			Not present
Type of fixing			Base mounting Wall mounting
Working temperature minin		nimum	-30°C
Working temperature max		aximum	+60°C
Weight with packaging			210 g
Product weight			129 g
ELECTRIC	AL DATA		
Operating voltage			24V
Operating voltage type			AC/DC
Operating voltage freque		ency	50Hz
Operating voltage toleran		ince	+/- 10%
Rated operational voltag		ge	24 VDC
Rated operational current		ht	40 mA
Rated inrush current			500 mA
Protection class			Protection class 3
Pollution degree			3
Request to external PSU			SELV/PELV
OPTICAL	DATA		
Light source			LED
Light colour		Green Red Yellow	
Optical signal image		Blink Permanent	
Blink frequency			1 Hz

50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Service life optical

i

## KombiSIGN 40 / DesignLOOK KS40 Design BWM 24VAC/DC GN/YE/RD


## APPROVAL DATA

Conforms with CE	Yes (through the components)	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	No	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

## KombiSIGN 40 / DesignLOOK KS40 Design BWM 24VAC/DC GN/YE/RD

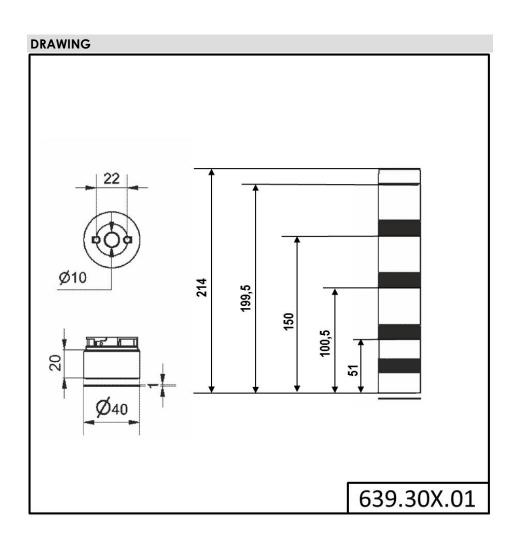

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.