Mounting Option

.344 (8.74) Offset Card Guides

Contact Detail


90 Degree Bend (Code 501 Contacts) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

See Accompanying Pages for: **Contact Bend Details**

Mounting Options

Features and Specifications

•

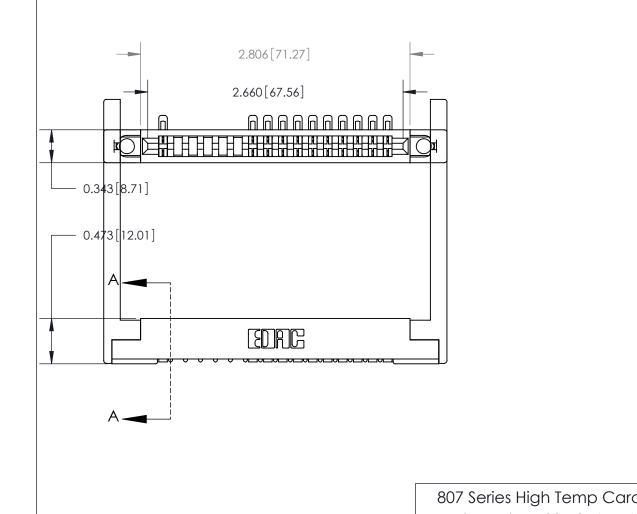


.175 [4.45] Point of Contact (Measured from bottom of Card Slot) ECTION A-A

Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board \bigcirc

807 Series High Temp Card Edge Connector			ACAD REFERENCE NO. 807 ENG MASTER				
			DRAWN:	J.LEE	DATE: AUG. 11/09		
Part Number: 807-016-554-168		CHECKED:		DATE:			
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.AND SHALL NOT BE REPRODUCED.OR COPIED OR LISED AS THE BASIS FOR THE	SCALE:	NTS	SHEET	1 OF 4		
		DRAWING	NUMBER		ISSUE		
	CANADA	MANUFACTURE OR SALE OF APPARATUS	8	07 Assembly		1	



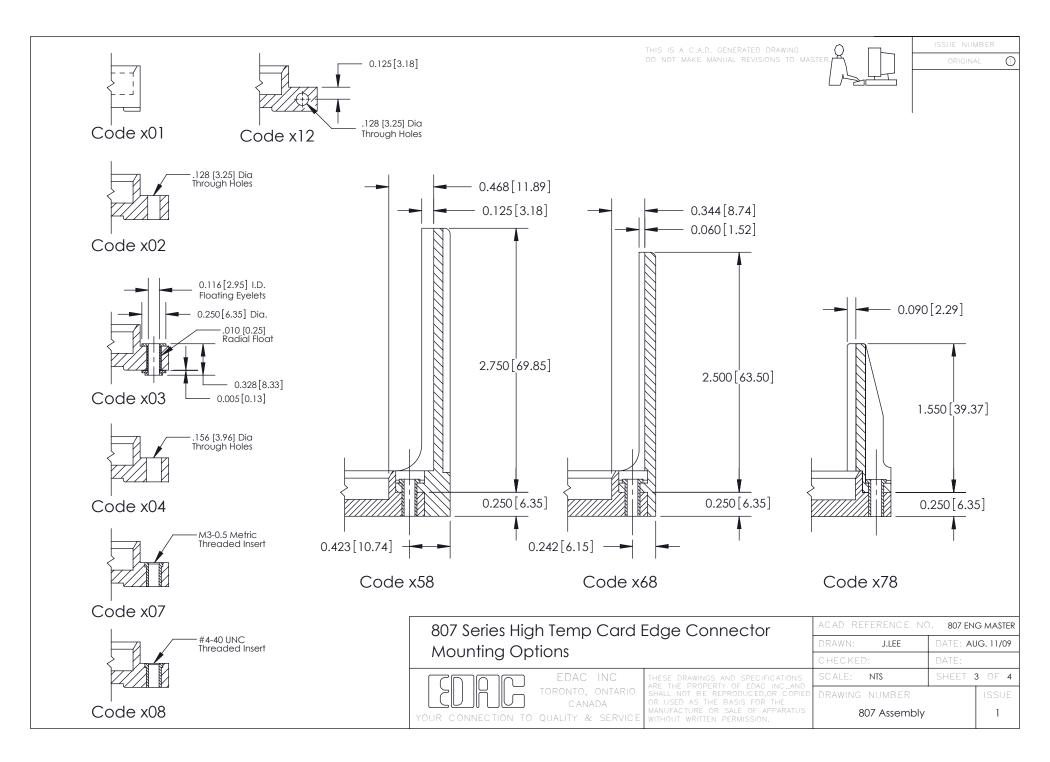

HIS IS A C.A.D. GENERATED DRAWING ON NOT MAKE MANUAL REVISIONS TO MASTER.

ORIGINAL

Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card Edge Connector Features and Specifications			ACAD REFERENCE NO. 807 ENG MASTER				
			J.LEE	DATE: AUG. 11/09			
rediores and specifications		CHECKED:		DATE:			
EDAC INC TORONTO, ONTARIO	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE:	NTS	SHEET 4	4 OF 4		
		DRAWING	NUMBER		ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		8	07 Assembly		1		