## **NSR05402**

# 500 mA, 40 V Schottky Barrier Diode

These Schottky barrier diodes are optimized for low forward voltage drop and low leakage current and are offered in a Chip Scale Package (CSP) to reduce board space. The low thermal resistance enables designers to meet the challenging task of achieving higher efficiency and meeting reduced space requirements.

#### **Features**

- Low Forward Voltage Drop 570 mV (Typ.) @  $I_F = 500 \text{ mA}$
- Low Reverse Current 3.0  $\mu$ A (Typ.) @  $V_R$  = 40 V
- ESD Rating Human Body Model: Class 3B
  - Machine Model: Class C
- High Switching Speed
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **Typical Applications**

- LCD and Keypad Backlighting
- Camera Photo Flash
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping and Protection

## **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Reverse Voltage	$V_R$	40	V
Forward Current (DC)	lF	500	mA
Forward Surge Current (60 Hz @ 1 cycle)	I <sub>FSM</sub>	8.0	Α
Repetitive Peak Forward Current (Pulse Wave = 1 sec, Duty Cycle = 66%)	I <sub>FRM</sub>	1.8	А
ESD Rating: Human Body Model Machine Model	ESD	>8.0 >400	kV V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1



## ON Semiconductor®

www.onsemi.com

## 40 V SCHOTTKY BARRIER DIODE





DSN2 (0201) CASE 152AA

#### MARKING DIAGRAM

PIN 1



P = Specific Device Code

M = Date Code

#### ORDERING INFORMATION

Device	Package	Shipping†
NSR05402NXT5G	DSN2 (Pb-Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### NSR05402

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Min	Тур	Max	Unit
Thermal Resistance Junction-to-Ambient (Note 1) Total Power Dissipation @ T <sub>A</sub> = 25°C	R <sub>θJA</sub> P <sub>D</sub>			329 380	°C/W mW
Thermal Resistance Junction-to-Ambient (Note 2) Total Power Dissipation @ T <sub>A</sub> = 25°C	R <sub>θJA</sub> P <sub>D</sub>			140 895	°C/W mW
Storage Temperature Range	T <sub>stg</sub>			-40 to +125	°C
Junction Temperature	TJ			+150	°C

- 1. Mounted onto a 4 in square FR-4 board 50 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.
- 2. Mounted onto a 4 in square FR-4 board 650 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.

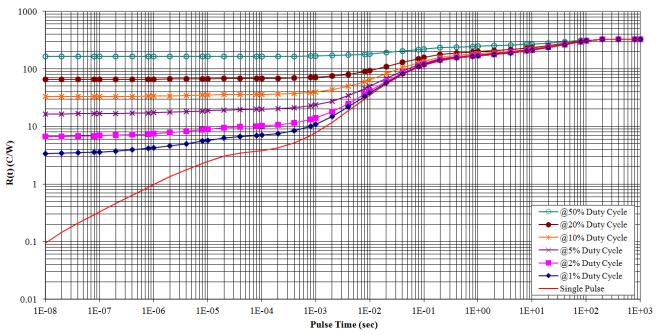


Figure 1. Thermal Response (Note 1)


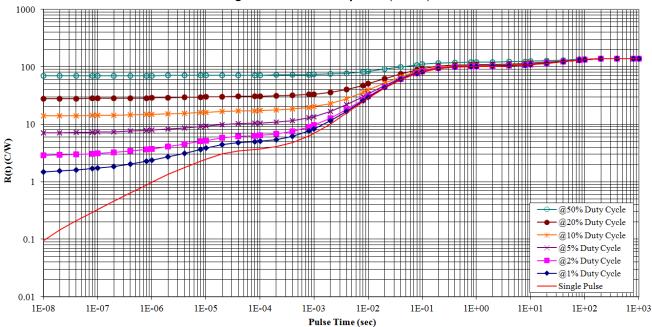


Figure 2. Thermal Response (Note 2)

#### NSR05402

## **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
Reverse Leakage (V <sub>R</sub> = 10 V) (V <sub>R</sub> = 40 V)	I <sub>R</sub>		0.3 3.0	4.0 20	μΑ
Forward Voltage (I <sub>F</sub> = 0.1 mA) (I <sub>F</sub> = 1 mA) (I <sub>F</sub> = 10 mA) (I <sub>F</sub> = 100 mA) (I <sub>F</sub> = 200 mA) (I <sub>F</sub> = 500 mA)	V <sub>F</sub>		180 230 310 400 450 570	220 255 350 440 480 620	mV
Total Capacitance (V <sub>R</sub> = 5.0 V, f = 1.0 MHz)	C <sub>T</sub>		9.5		pF
Reverse Recovery Time $(I_F = I_R = 10 \text{ mA}, I_{R(REC)} = 1.0 \text{ mA}), Figure 3$	trr		5.9		ns
Peak Forward Recovery Voltage (V <sub>R</sub> = 1.0 V, f = 1.0 MHz), Figure 4	V <sub>FRM</sub>		558		mV

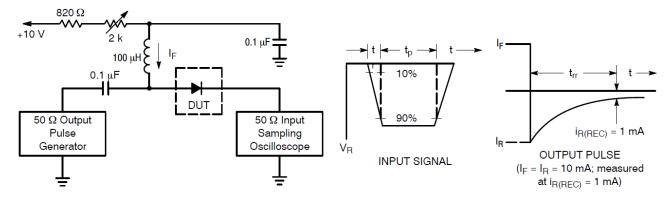

Notes: 1. A 2.0 k $\Omega$  variable resistor adjusted for a Forward Current (IF) of 10 mA.

- 2. Input pulse is adjusted so  $I_{\mbox{\scriptsize R(peak)}}$  is equal to 10 mA.
- 3. t<sub>p</sub> » t<sub>rr</sub>

Figure 3. Recovery Time Equivalent Test Circuit

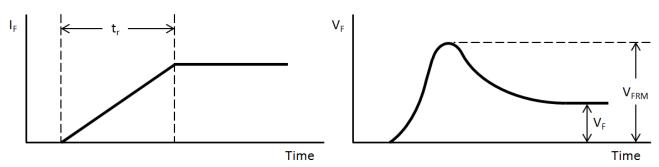


Figure 4. Peak Forward Recover Voltage Definition



DSN2, 0.6x0.3, 0.4P, (0201) CASE 152AA **ISSUE B** 


**DATE 30 APR 2017** 


#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
   CONTROLLING DIMENSION: MILLIMETERS.

	MILLIMETERS			
DIM	MIN	MAX		
Α	0.24	0.30		
A1	0.00	0.01		
b	0.20	0.22		
D	0.30 BSC			
E	0.60 BSC			
е	0.40 BSC			
L	0.10	0.12		

# В 2X \alpha 0.06 2X 🗀 0.06 С **TOP VIEW**





**BOTTOM VIEW** 

#### **GENERIC MARKING DIAGRAM1\***

## PIN<sub>1</sub> XXXX YYY

## **GENERIC MARKING DIAGRAM2\*** PIN 1




XXXX = Specific Device Code YYY = Year Code

X = Specific Device Code

M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G", may or not be present. Some products may not follow the Generic Marking.


#### **MOUNTING FOOTPRINT\***



DIMENSIONS: MILLIMETERS

See Application Note AND8398/D for more mounting details

#### **CATHODE BAND MONTH CODING**



DOCUMENT NUMBER:	98AON39897E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	DSN2, 0.6X0.3, 0.4P, (0201)		PAGE 1 OF 1	

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales