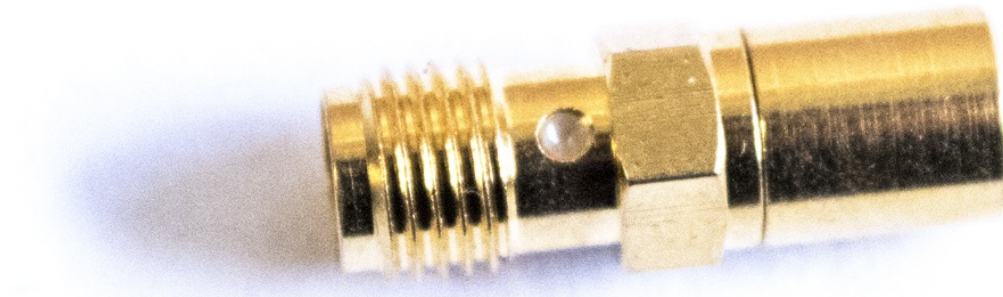


BU-P72979**(Female SMA to Female SMB Connector)**

- The BU-P72979 is a gold plated SMA to SMB adapter.
- Good for minimum of 500 insertion cycles.
- Overall length is 0.75" (19mm) and the hex is 0.25" (6.33mm) across flats
- Material:
 - Body – Gold plated Brass
 - Contacts – Gold plated Beryllium Copper
 - Insulator – PTFE
- Rating:
 - Impedance is 50Ω
 - Frequency is DC to 4 GHz.
 - Working voltage is 500 peak Max
 - Temperature range: -40°C to 165°C
- RoHS 2 Compliant