SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 75A



| | | | 2 2 |
|----------------------------------------------|-------------------------------|----------|----------------------------------------------------------------------------------|
| Product designation Product type designation | | | Soft starter ADXL |
| Motor type | | | Asynchronous three phase |
| Electrical features | | | tilice pliase |
| Supplies voltage | | | |
| | Type of system | | Three phase |
| | Rated supply voltage | V | 208600 VAC ±10% |
| | auxiliary supply voltage (Us) | | 100240VAC ±10% |
| | Rated frequency | Hz | 50/60 |
| Rated starter current le | . , | Α | 75 |
| Rated motor power | | | |
| IEC ratings (T≤40°C) | | | |
| | 230VAC | kW | 22 |
| | 400VAC | kW | 37 |
| | 500VAC | KW | 45 |
| UL ratings (T≤40°C) | | | |
| | 220-240VAC | hp | 25 |
| | 380-415VAC | hp | 40 |
| | 440-480VAC | hp | 50 |
| Ni wakay of apptuallad whappa | 550-600VAC | hp N° | 2 |
| Number of controlled phases Built-in bypass | | IN | Yes |
| Built-III bypass | | | Natural or forced |
| Cooling System | | | (optional) |
| Rated insulation voltage Ui | | V | 600 |
| Programming interface | | | |
| Display | | | Backlit icon LCD |
| | | | display |
| Programming with NFC technology | | | Yes |
| Optical port | | | Yes |
| Startup and stop settings | | | T |
| Startup method | | | Torque ramp with current limit, Voltage ramp with current limit, Constant torque |
| Stop method | | | with current limit Torque ramp, voltage ramp, free-wheel stop |
| Protections | | | |
| Auxiliary supply protection | | | Voltage too low |





SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 75A

| Power supply protection | | No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage |
|--------------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Motor protection Starter protection | | Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long Overcurrent, overtemperature, bypass failure, phase shorted, temperature |
| | | sensor fault, cooling fan fault, maintenance request |
| Input and Output | | |
| Digital inputs | | |
| | | n° 3 2 input with dry contact + 1 input |
| | Digital input type Digital input functions | with dry contact or PTC (configurable) Programmable (motor start, motor stop, freewheel stop, motor preheating, commands lock, alarms inhibition, thermal status reset, keyboard |
| Digital outputs | Number of digital output r | lock, motor selection, user alarm, command) n° 3 |






SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 75A

| | | Digital output arrangement Digital output functions | | 2 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 2 x 1NO contacts: 3A 250VAC - 3A 30VDC 1 x C/O contact: NO contact 5A 250VAC - 5A 30VDC; NC contact 3A 250VAC - 3A 30VDC Programmable (line contactor, run, global alarm, limits, remote variable, alarm Axx, user alarm Axx, OFF) |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient conditions | | | | |
| Temperature | | | | |
| | Operating temperature | | | |
| | | min | °C | -20 |
| | | | | +60°C (with |
| | | max | °C | current derating >40°C of 0.5%/ °C) |
| | Storage temperature | | | |
| | and the second of the second o | min | °C | -30 |
| | | max | °C | +80 |
| Max altitude | | | m | 1000 without derating (over 1000mt with current derating of 0.5%/100m) |
| Relative humidity | | | % | <80% |
| Pollution degree | | | | 2 |
| Installation category | | | | III |
| Housing | | | | |
| Mounting | | | | Screw-fixing or 35mm DIN rail with optional accessory EXP8003 |
| IP degree of protection | n | | | IP00 |
| Dimensions (W x H x I | D) | | mm | 95 x 226 x 182 |
| Weight | | | Kg | 2.9 |
| Dimensions | | | | |

ENERGY AND AUTOMATION

SOFT STARTER, ADXL... TYPE, WITH INTEGRATED BY-PASS RELAY. AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 75A

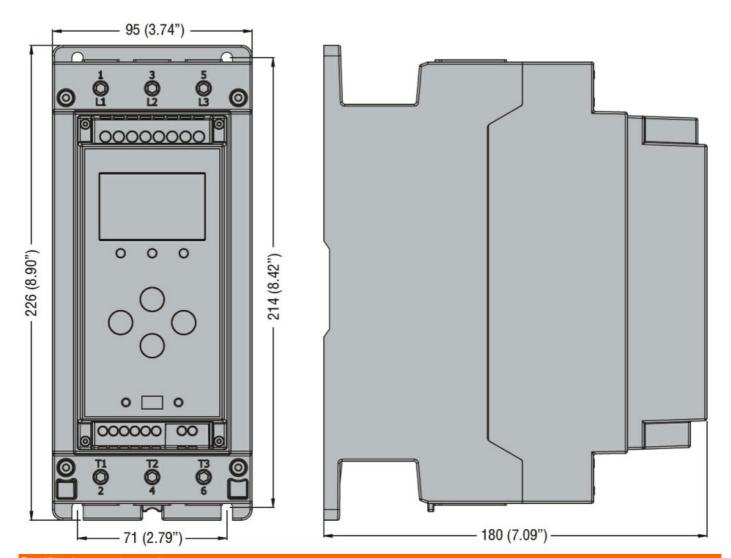

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-2

UL508

Certificates

cULus

EAC

RCM