



IMZ2A

COMPLEMENTARY DUAL GENERAL PURPOSE AMPLIFIER TRANSIS

VOLTAGE 50 Volt **POWER** 300mW

SOT-23 6L Unit : inch(mm)

FEATURES

- PNP/NPN epitaxial silicon, planar design
- Collector-emitter voltage $V_{CE}=50V$
- Collector current $I_C=150mA$
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case : SOT-23 6L plastic
- Terminals : Solderable per MIL-STD-750,Method 2026
- Approx. Weight : 0.0005 ounces, 0.014 grams
- Marking : Z2A





Fig.137

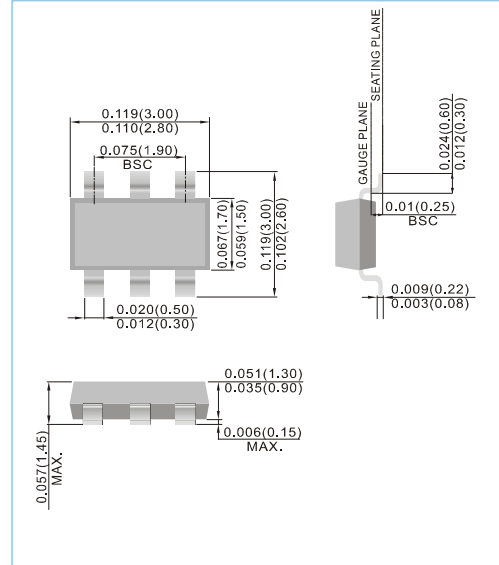

ABSOLUTE RATINGS ($T_A=25^{\circ}C$)

PARAMETER	SYMBOL	Tr1	Tr2	UNITS
Collector-Emitter Voltage	V_{CEO}	-50	50	V
Collector-Base Voltage	V_{CBO}	-60	60	V
Emitter-Base Voltage	V_{EBO}	-6	7	V
Collector Current Continuous	I_C	-150	150	mA

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	VALUE	UNITS
Max. Power Dissipation (Note1)	P_{TOT}	300	mW
Thermal Resistance, Junction to Ambient (Note1)	$R_{\theta JA}$	106	$^{\circ}C/W$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}C$

NOTE :

1. Transistor mounted on FR-4 board 70 x 60 x 1 mm.



IMZ2A

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Tr1 (PNP)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =-1mA	-50	-	-	V
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =-50μA	-60	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =-50μA	-6	-	-	V
Collector-Base Cutoff Current	I _{CBO}	V _{CB} =-60V	-	-	-0.1	μA
Collector-Emitter Cutoff Current	I _{EBO}	V _{EB} =-6V	-	-	-0.1	μA
DC Current Gain (Note1)	h _{FE}	V _{CE} =-6V, I _C =-1mA	120	-	560	-
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C /I _B =-50mA/-5mA	-	-	-0.5	V
Cutoff Frequency	f _r	I _E =2mA, V _{CE} =-12V, f=100MHz	-	140	-	MHz
Output Capacitance	C _{ob}	I _E =0mA, V _{CE} =-12V, f=100MHz	-	4	5	pF

Tr2 (NPN)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =1mA	50	-	-	V
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =50μA	60	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =50μA	7	-	-	V
Collector-Base Cutoff Current	I _{CBO}	V _{CB} =60V	-	-	0.1	μA
Collector-Emitter Cutoff Current	I _{EBO}	V _{EB} =7V	-	-	0.1	μA
DC Current Gain (Note1)	h _{FE}	V _{CE} =6V, I _C =1mA	120	-	560	-
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C /I _B =50mA/5mA	-	-	0.4	V
Cutoff Frequency	f _r	I _E =2mA, V _{CE} =12V, f=100MHz	-	180	-	MHz
Output Capacitance	C _{ob}	I _E =0mA, V _{CE} =12V, f=100MHz	-	2	3.5	pF



IMZ2A

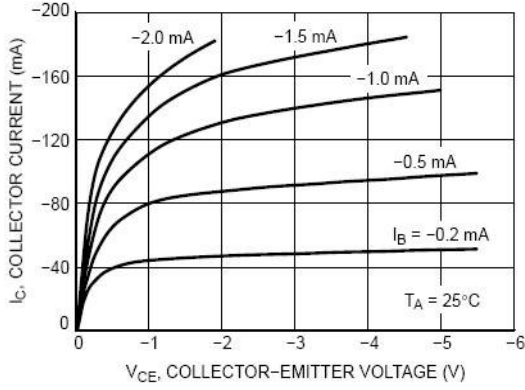


Fig. 1. Collector Saturation Region

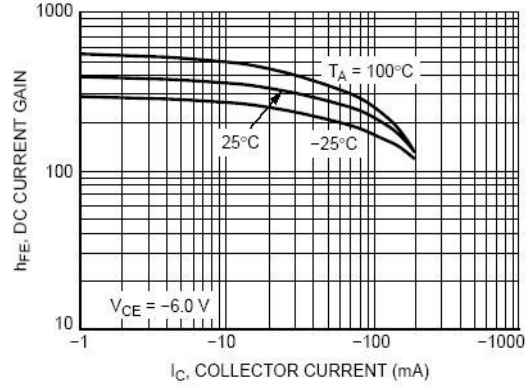


Fig. 2. DC Current Gain

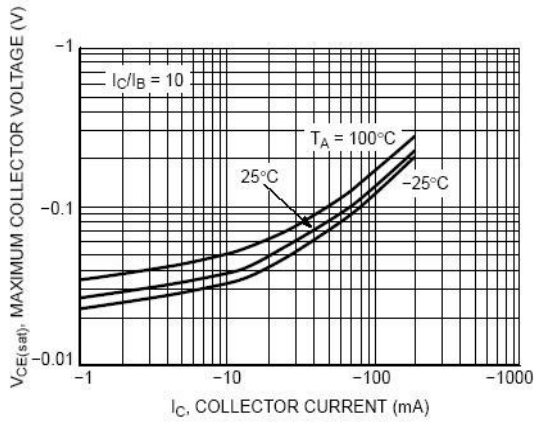


Fig. 3. $V_{CE(sat)}$ versus I_C

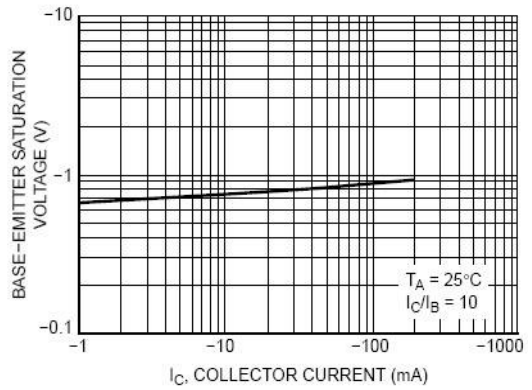


Fig. 4. $V_{BE(sat)}$ versus I_C

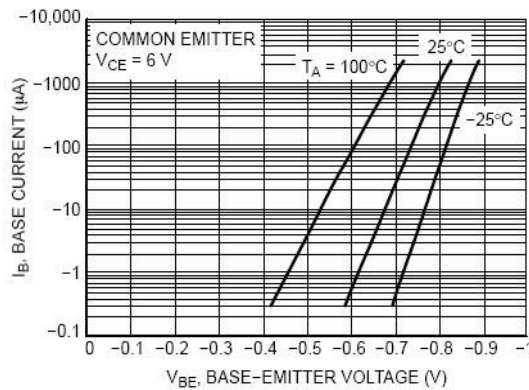


Fig. 5. Base-Emitter Voltage



IMZ2A

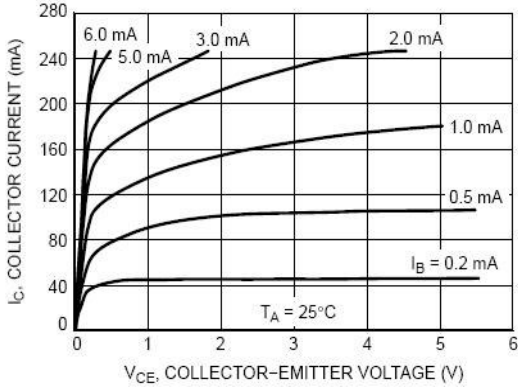


Fig. 1. Collector Saturation Region

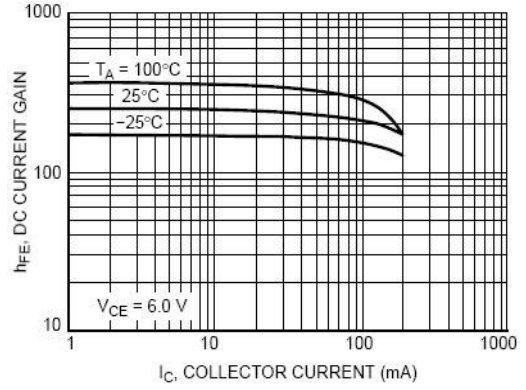


Fig. 2. DC Current Gain

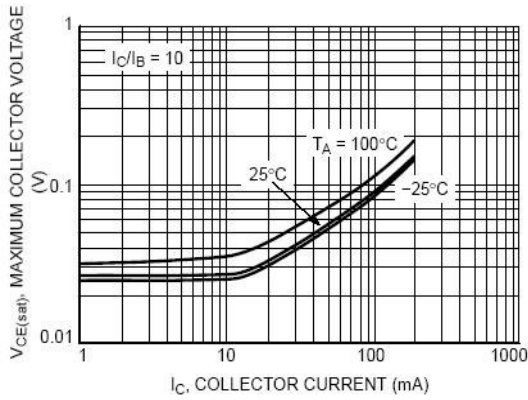


Fig. 3. $V_{CE(sat)}$ versus I_C

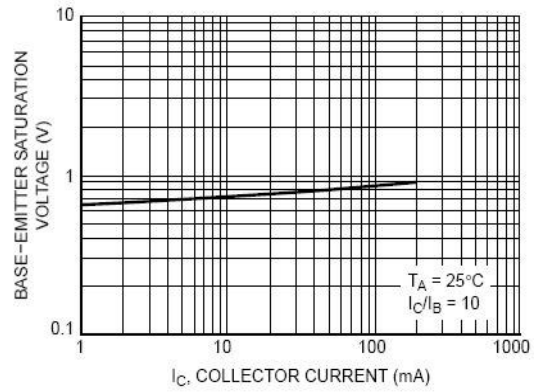


Fig. 4. $V_{BE(sat)}$ versus I_C


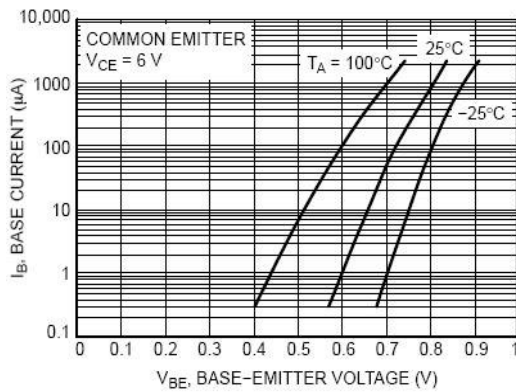


Fig. 5. Base-Emitter Voltage



IMZ2A

MOUNTING PAD LAYOUT

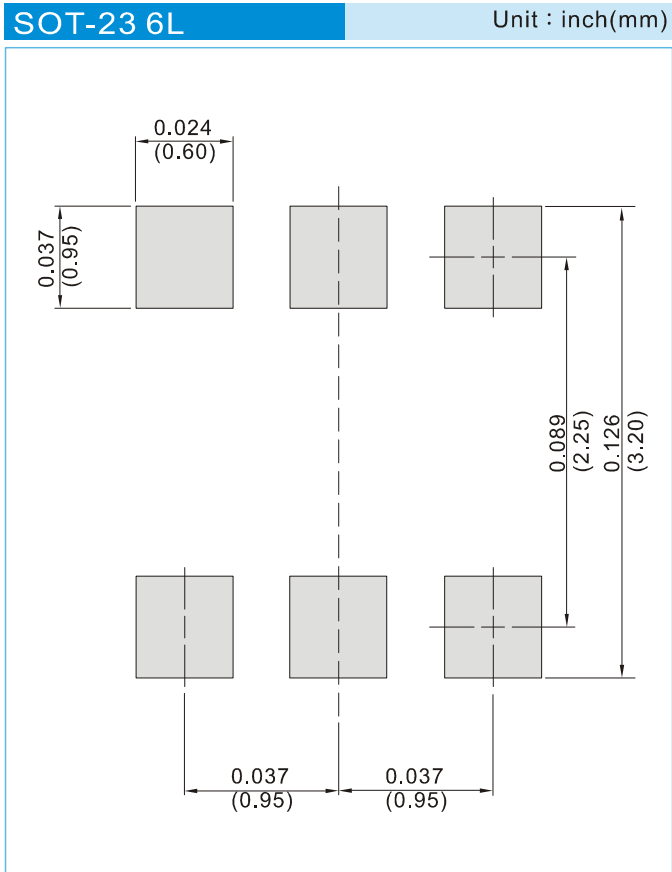

ORDER INFORMATION

- Packing information
T/R - 10K per 13" plastic Reel
T/R - 3K per 7" plastic Reel



IMZ2A

Part No_packing code_Version

IMZ2A_R1_00001

IMZ2A_R2_00001


IMZ2A_S1_00001

IMZ2A_S2_00001

For example :

RB500V-40_R2_00001

Part No.

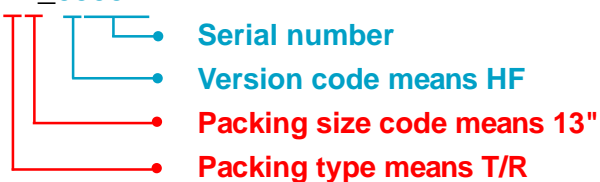

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



IMZ2A

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.