## SIEMENS

## Data sheet

## 3RV2321-4NC10



Circuit breaker size S0 for starter combination Rated current 28 A Nrelease 364 A screw terminal Standard switching capacity

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For starter combinations		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	SO		
size of contactor can be combined company-specific			
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
<ul> <li>at AC in hot operating state</li> </ul>	13.25 W		
<ul> <li>at AC in hot operating state per pole</li> </ul>	4.4 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27	25g / 11 ms		
mechanical service life (switching cycles)			
<ul> <li>of the main contacts typical</li> </ul>	100 000		
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000		
electrical endurance (switching cycles) typical	100 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
<ul> <li>during operation</li> </ul>	-20 +60 °C		
<ul> <li>during storage</li> </ul>	-50 +80 °C		
<ul> <li>during transport</li> </ul>	-50 +80 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
operating voltage			
<ul> <li>rated value</li> </ul>	20 690 V		
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V		
at AC-3e rated value maximum	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	28 A		
operational current			
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	28 A		
<ul> <li>at AC-3e at 400 V rated value</li> </ul>	28 A		

operating power	
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	22 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
-	No
phase failure detection	INO
breaking capacity maximum short-circuit current (Icu)	400 kA
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	55 kA
at AC at 500 V rated value	10 kA
at AC at 690 V rated value	4 kA
breaking capacity operating short-circuit current (Ics) at AC	
at 240 V rated value	100 kA
• at 200 V rated value	25 kA
at 500 V rated value	5 kA
	2 kA
at 690 V rated value	400 A
response value current of instantaneous short-circuit trip unit	400 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
<ul> <li>at 480 V rated value</li> </ul>	28 A
<ul> <li>at 600 V rated value</li> </ul>	28 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	2 hp
— at 230 V rated value	5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	7.5 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit	indynolo
protection of the main circuit	
• at 400 V	gL/gG 63 A
• at 500 V	gL/gG 63 A
• at 690 V	gL/gG 63 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
height	97 mm
······································	

width	45 mm			
depth	97 mm			
required spacing				
<ul> <li>for grounded parts at 400 V</li> </ul>				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
• for live parts at 400 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
	5 1111			
• for grounded parts at 500 V	30 mm			
— downwards	30 mm			
— upwards				
— at the side	9 mm			
• for live parts at 500 V				
— downwards	30 mm			
— upwards	30 mm			
— at the side	9 mm			
<ul> <li>for grounded parts at 690 V</li> </ul>				
— downwards	50 mm			
— upwards	50 mm			
— backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
<ul> <li>for live parts at 690 V</li> </ul>				
— downwards	50 mm			
— upwards	50 mm			
— backwards	0 mm			
— at the side	30 mm			
— forwards	0 mm			
Connections/ Terminals				
type of electrical connection				
for main current circuit	screw-type terminals			
	screw-type terminals Top and bottom			
• for main current circuit arrangement of electrical connectors for main current circuit				
for main current circuit     arrangement of electrical connectors for main current				
• for main current circuit arrangement of electrical connectors for main current circuit				
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections	Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²)			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts	Top and bottom			
for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections     for main contacts     — solid or stranded	Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²)			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing	Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             • at AWG cables for main contacts	Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²			
for main current circuit     arrangement of electrical connectors for main current     circuit      type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             • at AWG cables for main contacts              tightening torque	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8)			
for main current circuit     arrangement of electrical connectors for main current     circuit      type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             • at AWG cables for main contacts      tightening torque         • for main contacts with screw-type terminals	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m			
for main current circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections      for main contacts	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm			
for main current circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections      for main contacts          — solid or stranded          — finely stranded with core end processing          • at AWG cables for main contacts  tightening torque          • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm			
for main current circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections      for main contacts         — solid or stranded         — finely stranded with core end processing         • at AWG cables for main contacts  tightening torque         • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2			
for main current circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections      for main contacts         — solid or stranded         — finely stranded with core end processing         • at AWG cables for main contacts  tightening torque         • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip design of the thread of the connection screw         • for main contacts	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>B10 value</li>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4			
for main current circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections      for main contacts	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4			
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> <li>tightening torque</li> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                  <ul></ul></li></ul>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000			
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> </ul> </li> <li>proportion of dangerous failures         <ul> <li>with low demand rate according to SN 31920</li> <li>with high demand rate according to SN 31920</li> <li>with high demand rate according to SN 31920</li> </ul> </li> </ul>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 %			
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> </ul> </li> </ul>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 %			
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                     <ul> <li>for main contacts</li> </ul> </li> </ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures         <ul> <li>with low demand rate according to SN 31920</li> <li>with high demand rate according to SN 31920</li> <li>failure rate [FIT]                     <ul> <li>with low demand rate according to SN 31920</li> </ul> </li> </ul> </li>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 %			
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> </ul> </li> <li>proportion of dangerous failures         <ul> <li>with low demand rate according to SN 31920</li> </ul> </li> <li>with low demand rate according to SN 31920</li> </ul> <li>to value for proof test interval or service life according to IEC</li>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 % 50 %			
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>tightening torque         <ul> <li>for main contacts with screw-type terminals</li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>design of the thread of the connection screw                 <ul> <li>for main contacts</li> </ul> </li> </ul> </li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> </ul> </li> <li>proportion of dangerous failures         <ul> <li>with low demand rate according to SN 31920</li> <li>failure rate [FIT]                 <ul> <li>with low demand rate according to SN 31920</li> <li>T1 value for proof test interval or service life according to IEC 61508</li> </ul> </li> </ul></li></ul>	Top and bottom 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 10 mm <sup>2</sup> ) 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (16 12), 2x (14 8) 2 2.5 N·m Diameter 5 to 6 mm Pozidriv size 2 M4 5 000 50 % 50 % 50 FIT 10 y			

display version for sw	display version for switching status Handle					
Certificates/ approvals						
General Product Approval						
S.	CCC	<u>Confirmation</u>		<u>KC</u>	EHC	
Declaration of Conf	ormity	Test Certificates		Marine / Shipping		
UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	ABS	BUREAU VERITAS	
Marine / Shipping					other	
	Lloyds Register urs	PRS	RINA	RMRS	<u>Confirmation</u>	
other	Railway					
	<u>Confirmation</u>	Vibration and Shock				
Further information						
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-4NC10						

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-4NC10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4NC10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2321-4NC10&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4NC10/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2321-4NC10&objecttype=14&gridview=view1

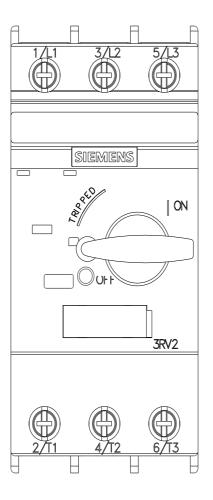

last modified:

6/25/2022 🖸