Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM 24VAC/DC WH/GN/YE/RD



i

	698.440.75	
Series:	Kompakt 37	
MECHAN	ICAL DATA	
Height		209 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Silver
Protection category		IP65
Connection		M12 plug 8-pole
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		153 g
Product weight		101 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated op	erational voltage	24 VDC
Rated operational current		135 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3
		In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red White Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum
APPROVA		
Conform		Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i


Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM 24VAC/DC WH/GN/YE/RD

WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM 24VAC/DC WH/GN/YE/RD

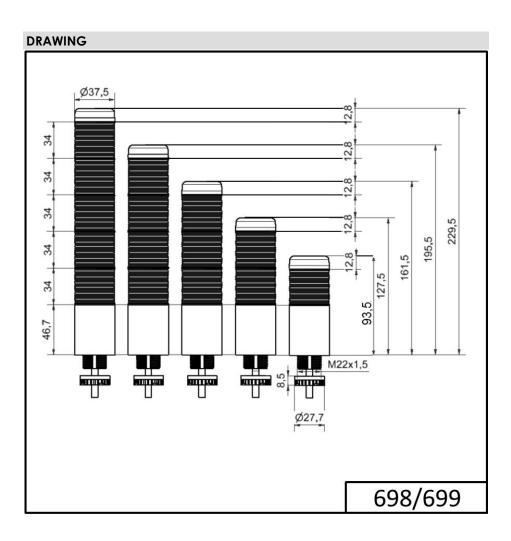

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.