



CMD69273P

Low PIM 2-Port MIMO Ceiling Mount Antenna 698-960 MHz/1710-2700 MHz

The CMD69273P, using patent-pending technology, is an indoor broadband low PIM 2-port MIMO omnidirectional ceiling mount antenna. It is designed to provide pattern coverage optimized for indoor requirements at 698-960 MHz and 1710-2700 MHz frequency bands. The individual antenna elements are designed with linear H/V-polarization components oriented to radiate a pattern that has been specifically shaped to deliver optimal performance from a ceiling mount location.

FEATURES AND BENEFITS

- Mounts directly and easily to ceiling tile
- Two radiating elements optimized for indoor MIMO applications
- Low cross correlation between radiating elements
- Low passive intermodulation
- Complete cellular and 3G/4G data communications
- Full Plenum rating allows for above-ceiling installations

ELECTRICAL SPECIFICATION

Operating Frequency (MHz)	698-806	824-894	880-960	1710-1880	1850-1990	1910-2170	2300-2500	2500-2700
VSWR - Avg	<1.7:1	<1.7:1	<1.7:1	<1.8:1	<1.7:1	<1.7:1	<1.5:1	<1.5:1
VSWR - Max	2.0:1							
Gain - Min (dBi)	3.1	3.1	2.8	5.9	4.5	4.3	5.9	6.9
Gain Horizon 30° - Max (dBi)	3.9	3.8	3.5	6.8	5.1	4.7	6.3	7.4
PIM - 2x20W - Typ (dBi)	< -154			< -155				
PIM - 2x20W - Max (dBi)	< -150							
Efficiency (%)								
Isolation - 2 (dB)	< -20	< -22	< -18	< -26	< -25	< -22	< -20	< -20
Nominal Impedance (Ohms)	-50							
Max Power - Ambient 25°C (W)	50							
Power Handling (W)								
Polarization	Linear H/V for each Radiator							
Azimuth Beamwidth	Omnidirectional							

MECHANICAL SPECIFICATION

Dimensions - diameter x height - mm (in.)	218.7 (8.61) x 43.5 (1.71)
Weight - kg (oz.)	0.41 (14.46)
Radome	PC /ABS, UV stable
Mounting	Ceiling mount (flush mount with screws and anchors)

ENVIRONMENTAL SPECIFICATION

Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Flammability Rating	UL 94V0 Materials
Material Substance Compliance	RoHS Compliant
Standard for Safety: Information Technology Equipment	UL/CSA/EN/IEC/CB-Scheme 60950-1 Listed
Standard for Safety: Fire and Smoke (Plenum)*	UL 2043 Certified


* Antenna (with cables) - fully Plenum-compliant

CONFIGURATION


PART NUMBER	CABLE LENGTH	CONNECTOR
CMD69273P-FNF	N/A (direct connect)	Dual Type N-female
CMD69273P-30NF	Dual 30 cm (12 in.)	Dual Type N-female
CMD69273P-46NF	Dual 46 cm (18 in.)	Dual Type N-female
CMD69273P-30D41F	Dual 30 cm (12 in.)	Dual 4.1-9.5 DIN female
CMD69273P-30D43F	Dual 30 cm (12 in.)	Dual 4.3-10 DIN female

RADITION PATTERNS


698 MHz

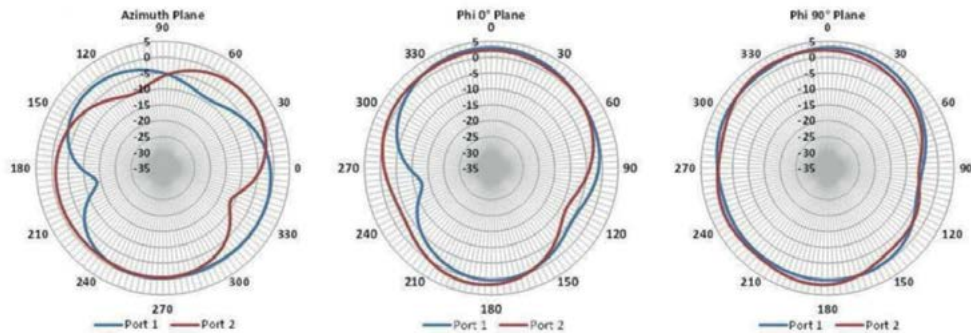


800 MHz

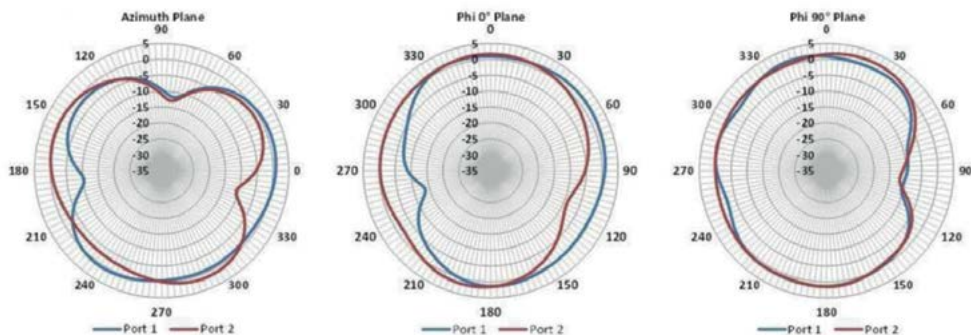


960 MHz

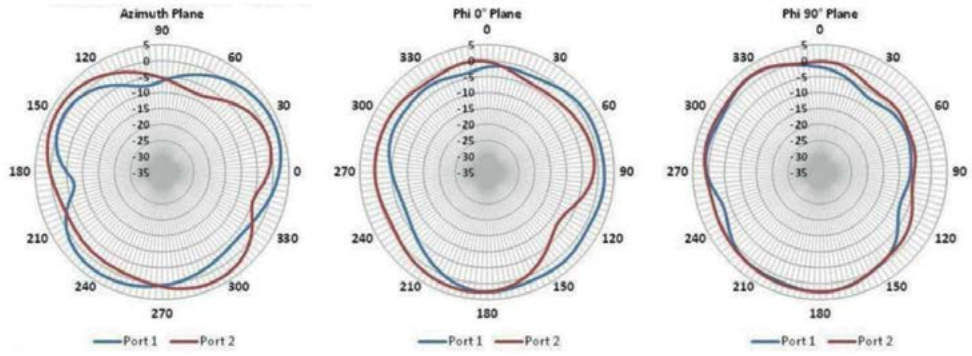


1710 MHz

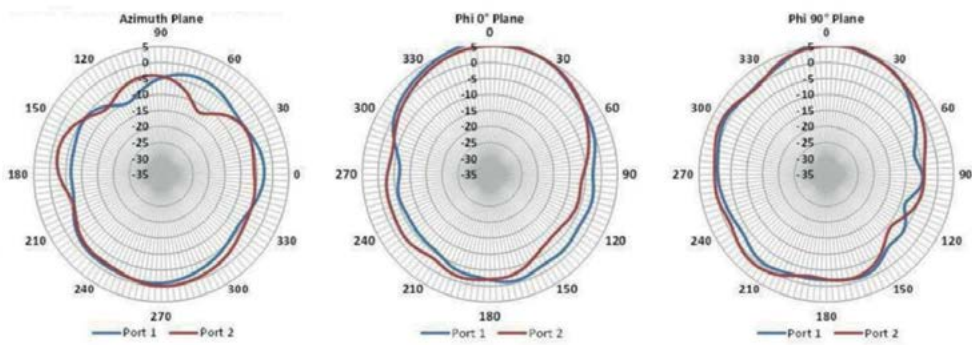


1950 MHz

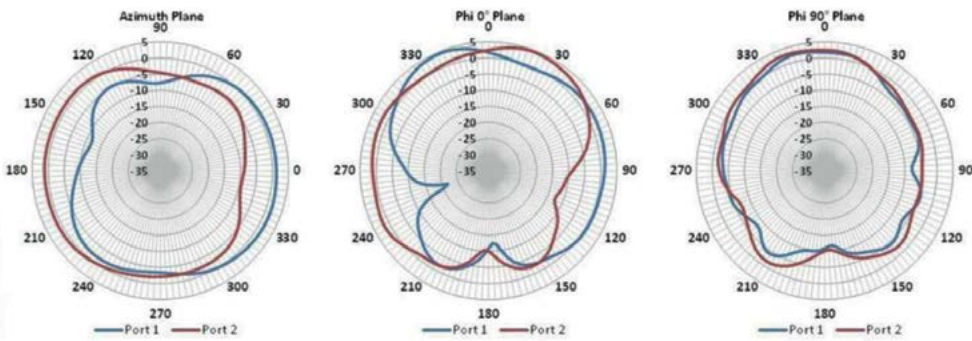

2170 MHz

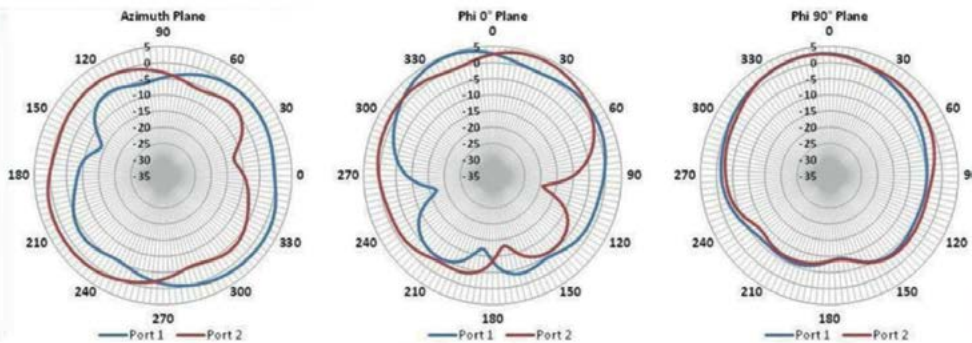

2700 MHz

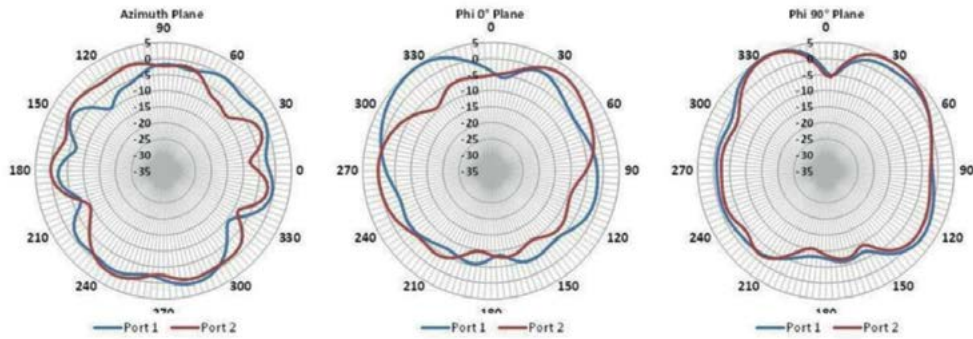

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original