
TOLERANCE UNLESS OTHERWISE SPECIFICE THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)

ORIGINAL

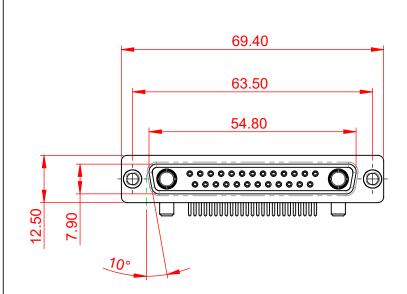



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

| ſ | COMBINATION D-SUB | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | |
|---|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | l | | | DATE: | |
| ſ | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 4 |
| | YOUR CONNECTION TO QUALITY & SERVICE | | DRAWING NUMBER: 630-27W2 | 2250-4T1 | ISSUE |
| | | | PART NUMBER: 630-27W2 | 2250-4T1 | 1 |

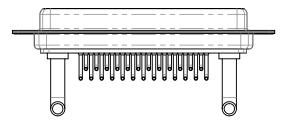



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 94V-0

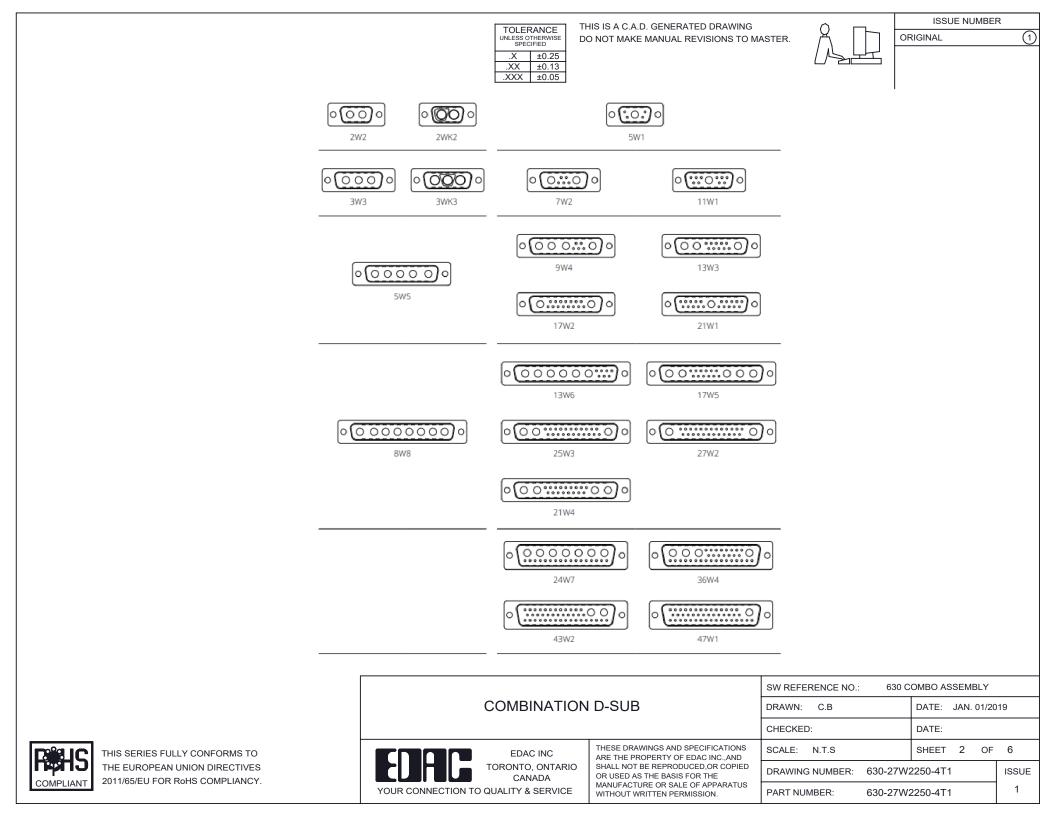



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female

COMBINATION D-SUB





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE




27W2 Male/Female

21W4 Male/Female


PCB EDGE

5W5 Female



8W8 Female






22.70 PCB EDGE

21W1 Male/Female



CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



OR USED AS THE BASIS FOR THE

WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO. 630 COMBO ASSEMBLY C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS 3 OF 4 SCALE: N.T.S SHEET ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED 630-27W2250-4T1 DRAWING NUMBER: ISSUE MANUFACTURE OR SALE OF APPARATUS 1 PART NUMBER: 630-27W2250-4T1




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

PCB EDGE

PCB EDGE

31.75

36W4 Female



13W6 Male





30.50

2.77

22.16

20.7

13.72

PCB EDGE

13W6 Female

13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

43W2 Female




17W5 Male







COMBINATION D-SUB



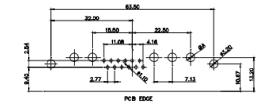

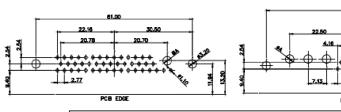

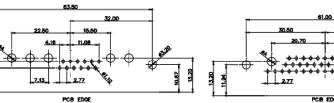

PCB EDGE



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

| SW REFERENCE NO.: 630 C | OMBO ASSEMBLY | | | | | |
|--------------------------|-----------------------|--|--|--|--|--|
| DRAWN: C.B | DATE: JAN. 01/2019 | | | | | |
| CHECKED: | DATE: | | | | | |
| SCALE: N.T.S | SHEET 4 OF 4 | | | | | |
| DRAWING NUMBER: 630-27W2 | 2250-4T1 ISSUE | | | | | |
| PART NUMBER: 630-27W2 | 2250-4T1 ¹ | | | | | |