RoHS Complian:

CAB438RF: MMCX RIGHT ANGLE PLUG + ISOLATED TNC BULKHEAD JACK WITH O-RING RATED TO IP67/68 + RG178 CABLE, 6GHz

SPECIFICATIONS

- 1. MMCX STRAIGHT PLUG. P/N: RFCT-MMCX003-M78.
- 2. RG178 COAXIAL CABLE, COLOR: BROWN.
- 3. ISOLATED THE STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68, P/N: RFCT-TNC016-F78.

ENVIRONMENTAL:


- A. BULKHEAD MOUNTED CONNECTOR (RFCT-TNC016-F78) RATED TO THE FOLLOWING SPECIFICATION:
 - i. IP6X DUST TIGHT NO PARTICLE INGRESS.
- ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.
- iii. IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.


NOTES:

- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY. IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 50MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1. F2. ETC)
- 3. CONTACT GRADCONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4 WORKING FREQUENCY RANGE: DC-6GHz.
- 5. OPFRATING TEMPERATURE: -40°C~+125°C.
- 6. IMPEDANCE: 50 Ohm.

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS

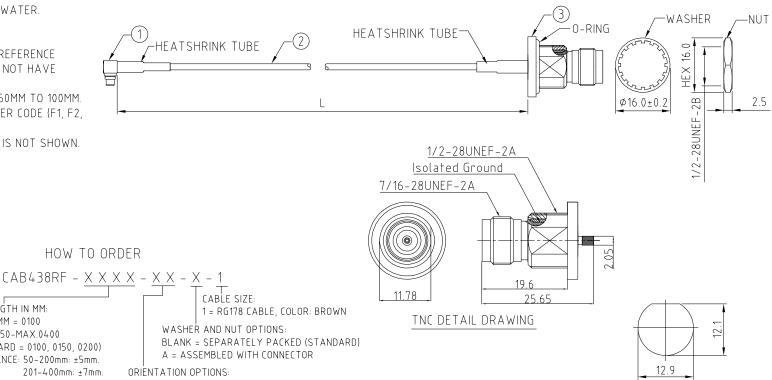



"L" LENGTH IN MM: eg: 100MM = 0100(MIN. 0050-MAX.0400 STANDARD = 0100, 0150, 0200) TOLERANCE: 50-200mm: ±5mm. 201-400mm: ±7mm. BLANK = DOES NOT HAVE A FIXED ORIENTATION F1 = MMCX CONNECTION DOWN (L=50-200MM)

F2 = MMCX CONNECTION UP (L=50-200MM) (SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

Tolerances: N/A N/A N/A THIRD ANGLE Unstated NTS Scale: .X .XX XXX Drawn: NYW ANGLES N/A Title CABLE ASSEMBLY XXX App'd: Revision: 1.1 Date: 16 NOV. '20 Unit: mm





(C) THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Drawing Number CAB438RF

RECOMMENDED MOUNTING HOLE MAX. PANEL THICKNESS: 4MM

TOLERANCE: ±0.1

of 1 Sheet 1 Drawing (C) E and 0 E