


a YAGEO company

C2220C104MBR1CAUTO

KPS SMD Auto X7R HV, Ceramic, 0.1 uF, 20%, 630 VDC, X7R, 2220-1

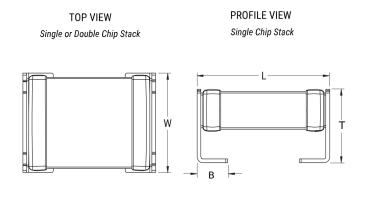

Click here for the 3D model.

| Dimensions | , |
|------------|-----------------|
| L | 6mm +/-0.5mm |
| W | 5mm +/-0.5mm |
| Т | 3.5mm +/-0.30mm |
| В | 1.6mm +/-0.3mm |

| Packaging Specifications | |
|--------------------------|--------------------------|
| Packaging | T&R, 180mm, Plastic Tape |
| Packaging Quantity | 300 |

| General Information | |
|---------------------|--|
| Series | KPS SMD Auto X7R HV |
| Style | Stacked Chip |
| Description | SMD, MLCC, Stacked, Single Chip, High Voltage, Class II, Automotive Grade |
| Features | Automotive Grade |
| RoHS | Yes |
| Termination | Tin |
| Qualifications | AEC-Q200 |
| AEC-Q200 | Yes |
| Component Weight | 410 mg |
| Miscellaneous | X7R dielectric is not recommended for AC line filtering or pulse applications. |
| Chip Size | 2220-1 |
| Shelf Life | 78 Weeks |
| MSL | 1 |

| Specifications | |
|--|--|
| Capacitance | 0.1 uF |
| Measurement Condition | 1 kHz 1.0Vrms |
| Capacitance Tolerance | 20% |
| Voltage DC | 630 VDC |
| Dielectric Withstanding Voltage | 945 VDC |
| Temperature Range | -55/+125°C |
| Temperature Coefficient | X7R |
| Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC) | 15%, 1kHz 1.0Vrms |
| Dissipation Factor | 2.5% 1 kHz 1.0Vrms |
| Aging Rate | 3% Loss/Decade Hour: Referee Time is 1000 Hours |
| Insulation Resistance | 10 GOhms |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.