




APPROVED: _____
 DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/23/21	
A		UPDATE TITLE.	6/10/21	
B		UPDATE LABEL	7/19/21	WX/AC

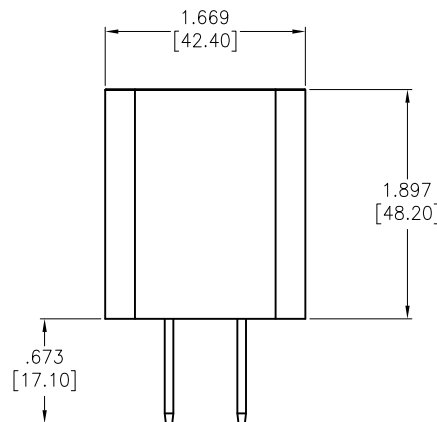

USB, TYPE C FEMALE

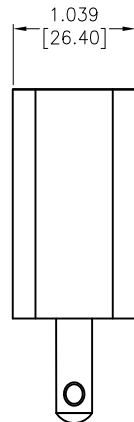

.673 [17.10]

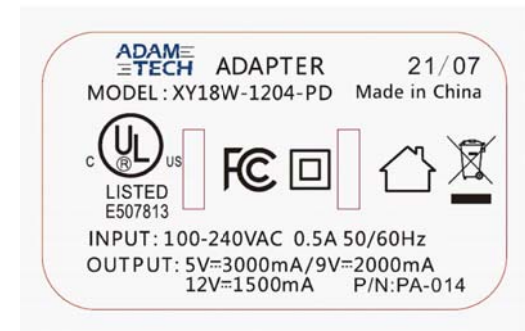

SPECIFICATIONS:

Material:
 Case, cover & Chassis: PPHOX, rated UL94V-1, Color: white
 AC Blades: Brass, Nickel plated

Electrical:
Input:
 Voltage: 100Vac to 240Vac
 Current: 0.5A Max. @ 100Vac input & max load
 Frequency: 50Hz / 60Hz
Output:
 Voltage: 5V @ 3A
 9V @ 2A
 12V @ 1.5A
 Load Regulation: ± 7%
 Line Regulation: ± 7%

Insulation Resistance: 50 Mohms min @ 500VDC
 Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute
 Leakage Current: 0.25mA max. @ 240V AC/50Hz
 Temperature Rating:
 Operating Temperature: -10°C to +40°C
 Storage Temperature: -20°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.x	± .10	∅x	± .10
.xx	± .020	∅xx	± .015
.xxx	± .015	∅xxx	± .010

DRAWN	WX	3/23/21
CHECKED	AC	3/23/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 AC POWER ADAPTER, NEMA 1-15 TO
 USB TYPE C, MULTIPLE OUTPUTS, COLOR WHITE

SIZE	PART NO.	REV.
X	PA-014	B

REF: _____ SCALE: NTS SHEET 1 OF 1